

**Order No.:** 5XA779629V02FB | **GTIN (EAN):** 4069025144034


**Product description:** FL11mxproRe,PL64,246990lm757,DA2,gy



Floodlight FL 11 maxi pro Remote floodlight; light control with lens of PMMA; cover panel of toughened safety glass, transparent; light distribution: PL64, asymmetric direct distribution, LED; colour temperature: 5700K, rated luminous flux: 246.990lm, colour rendering: CRI > 70, light colour: 757; luminous efficacy: 132lm/W; pre-setting: logarithmic dimming characteristic; brightness control: DALI 2; with terminal, 5-pole, max. 2.5mm<sup>2</sup>, mains connection: 220..240V/380..400V AC, 50/60Hz, surge voltage resistance: line to ground: 10kV, LED service life up to 100,000h L90. Typical operating time: 1000h per year., ECG replaceable separately, LED unit replaceable without ESD environment, dustproof LED module, dimming range 10..100%; 1865W floodlight with 3x LED unit of diecast aluminium, coated grey; length: 1.003mm / width: 651mm / height: 338mm; mounting bracket, of diecast aluminium, uncoated, natural, equipment: Power, protection rating (complete): IP66; insulation class (complete): insulation class I (protective earthing); certification: CE, ENEC, VDE; ball protection: ball impact resistant, only for outdoor installations in the designated locations, permissible operating ambient temperature: -45..+55°C, permissible storage temperature: -40..+85°C; packaging unit: 1 piece



**Lamps:** LED  
**Wt. (kg):** 40.0  
**GTIN (EAN):** 4069025144034

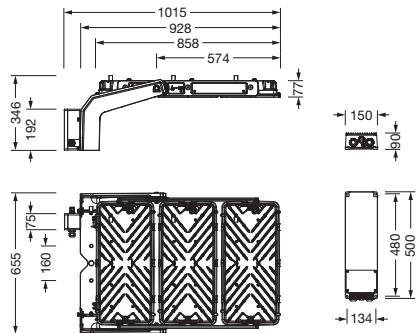

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))  
 Tolerances related to thermal, electrical and photometric data according to IEC 62722  
 Issued 10.10.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 5XA779629V02FB | **GTIN (EAN):** 4069025144034**Detailed technical description:** FL11mxproRe,PL64,246990lm757,DA2,gy**Key data**

- Product type: floodlight
- Product name: Floodlight FL 11 maxi pro Remote
- Order No.: 5XA779629V02FB

**Lighting technology | Lamps | Control gear****Component 1****Lighting technology:**

- Light control: lens of PMMA
- Cover: cover panel, transparent
- Light distribution: PL64
- Symmetry: asymmetric distribution
- Light emission: direct distribution

**Lamps:**

- Lamps: with LED
- Rated values: 246990lm | 1864.9W | 132.4lm/W
- Colour temperature: 5700K
- Colour rendering index: CRI > 70
- Light colour: 757
- Supplement: LED service life up to 100,000h L90. Typical operating time: 1000h per year.

**Factory light settings (LS):**

- LS 1: 100% | 246990lm | 1864.9W | 132.4lm/W | 5700K
- further light settings possible

**Operating device:**

- Control: DALI 2
- Equipment: pre-setting: logarithmic dimming characteristic

**Certificates, Standards**

- Protection rating: IP66
- Insulation class: insulation class I (protective earthing)
- Temperature range (operation): - 45..+55°C
- Supplement: only for outdoor installations in the designated locations
- Certification, designation: CE, ENEC, VDE

**Material, Colour**

- LED unit: diecast aluminium, coated, grey, with parrot-proof cable protection
- Quantity: 3 piece
- Colour specification: grey
- mounting bracket: diecast aluminium, uncoated, natural
- Colour specification: natural
- Cover: cover panel of toughened safety glass

**Mounting**

- Mounting method, mounting location: surface-mounted, to supporting structure, to the ceiling, to the cross arm
- Arrangement: single arrangement
- Supplement: with mounting bracket

**Electrical connection**

- Connection: terminal, 5-pole, max. 2.5mm<sup>2</sup>
- Nominal voltage: 220..240V/380..400V, 50/60Hz, AC
- Surge voltage resistance: line to ground: 10kV

**Dimensions, Weight**

- Length: 1003mm
- Width: 651mm
- Height: 338mm
- Weight: 40.0kg
- Supplement: luminaire head with bracket 24kg, control gear 7.0kg

**Light emission**


- Light emission: 0%

**Place of operation**

- Suitable for: Australia, Croatia, Italy (south), Portugal, Serbia, Spain

**Order No.:** 5XA779629V02FB | **GTIN (EAN):** 4069025144034

**Dimensions:** FL11mxproRe,PL64,246990lm757,DA2,gy

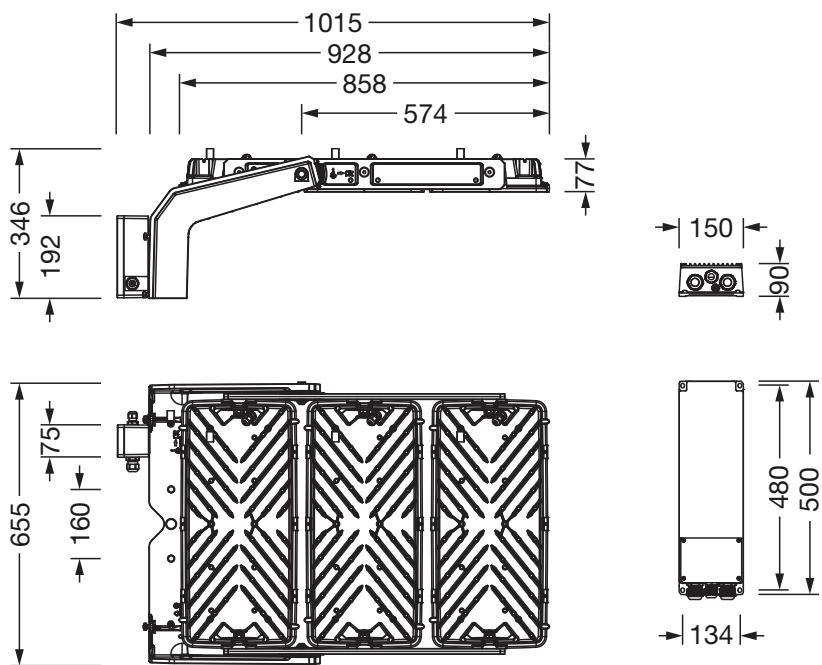

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))  
 Tolerances related to thermal, electrical and photometric data according to IEC 62722  
 Issued 10.10.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -