

**Order No.:** 5LZ904001A | **GTIN (EAN):** 4069025312198


**Product description:** DA2repea,DALI,rec



DALI2repeater, master, central control - connection to lighting or building management, dimmable, installation type: recessed, installation location: in an electrical distributor, of plastic, part units: 2 part units, protection rating (complete): IP20, insulation class (complete): insulation class II (safety insulation), certification: CE, UKCA, voltage: 100..240V, voltage type: AC, 1 x DALI, 1 x TouchDim input, 1 x DALI broadcast, packaging unit: 1 piece

IP 20  

Wt. (kg): 0.2  
GTIN (EAN): 4069025312198



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 5LZ904001A | **GTIN (EAN):** 4069025312198

**Detailed technical description:** DA2repea,DALI,rec



## Key data

- System family: Siteco Connect 11, SITECO Connect 21
- Product type: repeater
- Product name: DALI2
- Order No.: 5LZ904001A

## Lighting technology | Lamps | Control gear

### Component 1

#### Operating device:

- Control: DALI 2, dimmable

#### Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class II (safety insulation)
- Temperature range (operation): 0...+50°C
- Certification, designation: CE, UKCA

#### Material, Colour

- housing: plastic, grey, 2 part units
- housing: plastic, grey, 2 part units
- Colour specification: grey

#### Mounting

- Mounting method, mounting location: recessed, in an electrical distributor
- Supplement: only suitable for use in indoor areas

#### Electrical connection

- Connection: terminal, 2-pole, max. 1.5mm<sup>2</sup>
- Nominal voltage: 100...240V, 50/60Hz, AC

#### Dimensions, Weight

- Length: 96mm
- Width: 36mm
- Height: 96mm
- Weight: 0.2kg

#### Inputs

##### 1x DALI

- Connection: plug-in terminal, 2-pole, max. 1.5mm<sup>2</sup>

##### 1x TouchDim input

- Connection: plug-in terminal, 1-pole, max. 1.5mm<sup>2</sup>


#### Outputs

##### 1x DALI broadcast

- Connection: plug-in terminal, 2-pole, max. 1.5mm<sup>2</sup>
- Limiting: max. 64x ECG DALI
- System current: max. 250mA
- Cable length: max. 300m

**Order No.:** 5LZ904001A | **GTIN (EAN):** 4069025312198

**Dimensions:** DA2repea,DALI,rec

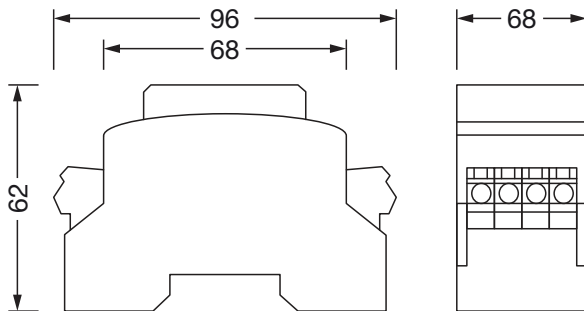

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail [info@siteco.de](mailto:info@siteco.de) • Internet [www.siteco.com](http://www.siteco.com)