


**Order No.:** 52HN11DB3LLA | **GTIN (EAN):** 4069025445186


**Product description:** HB21/Lic-mx,nrrw,25590lm830,DA2



high bay luminaire Highbay 21 for Licross® trunking rail maxi; direct symmetric narrow distribution, light control with lens of PMMA; UGR ≤ 19 (X = 4H | Y = 8H | S = 0.25H | reflection values 70/50/20); luminous flux: 25.590lm; light colour: 830, colour temperature: 3000K, MacAdam ≤ 3 SDCM (initial), colour rendering: CRI > 80; luminous efficacy: 177,7lm/W; rated service life: 75.000h (L80) at AT= ta max; control: DALI 2; luminaire connection: plug, 5-pole, with phase selection mains connection: 230..240V, AC 50/60Hz; connected load: 144W; protection rating (complete): IP64; insulation class (complete): insulation class I (protective earthing); protection symbol: D; impact resistance: IK06; certification: CE, ENEC, VDE, UKCA; internal wiring halogen-free; luminaire LABS conformity tested according to VDMA 24364:2018-05; Suitable for use in the food industry according to the specifications of IFS-Food, HACCP and/or BRC; housing frame of high-performance plastic PA6, matt traffic white (RAL 9016); cover of PMMA; fixing on rail side of steel, galvanised, white; blank cover of PC/ABS, traffic white (RAL 9016); dimension (LxWxH): 1.250 x 442 x 71mm; permissible operating ambient temperature: -40..+55°C (reducing of maximum allowable ambient temperature of 5°C with ceiling mounting); packaging unit: 1 piece



|             |               |
|-------------|---------------|
| Lamps:      | LED           |
| Wt. (kg):   | 7.0           |
| GTIN (EAN): | 4069025445186 |

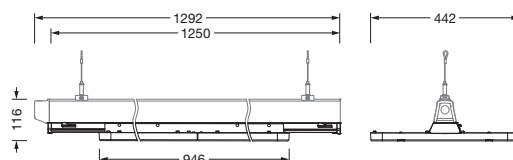

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 15.08.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 52HN11DB3LLA | **GTIN (EAN):** 4069025445186

**Detailed technical description:** HB21/Lic-mx,nrrw,25590lm830,DA2



## Key data

- Product type: high bay luminaire
- Product name: Highbay 21 for Licross® trunking rail maxi
- Order No.: 52HN11DB3LLA

## Lighting technology | Lamps | Control gear

### Component 1

#### Lighting technology:

- Light control: lens of PMMA
- Cover: cover
- Beam angle: narrow distribution
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis:  $\leq 19$
- UGR viewing direction along lateral luminaire axis:  $\leq 19$

#### Lamps:

- Lamps: with LED
- Rated luminous flux: 25590lm
- Luminous efficacy: 178lm/W
- Colour temperature: 3000K
- Colour rendering index: CRI > 80
- Light colour: 830
- SDCM (Standard Deviation of Colour Matching): MacAdam  $\leq 3$  SDCM (initial)
- Rated input power: 144W
- Supplement: internal wiring halogen-free

#### Operating device:

- Control: DALI 2

#### Certificates, Standards

- Protection rating: IP64
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK06
- Protection symbol: D
- Temperature range (operation): -40...+55°C
- Supplement: LABS conformity tested according to VDMA 24364:2018-05, Suitable for use in the food industry according to the specifications of IFS-Food, HACCP and/or BRC
- Certification, designation: CE, ENEC, VDE, UKCA

## Material, Colour

- housing frame: high-performance plastic PA6, matt traffic white (RAL 9016)
- Colour specification: matt traffic white (RAL 9016)
- fixing on rail side: steel, galvanised, white
- Colour specification: white
- blank cover: PC/ABS, traffic white (RAL 9016)
- Colour specification: traffic white (RAL 9016)
- Cover: cover of PMMA

## Mounting

- Arrangement: continuous row arrangement

## Electrical connection

- Connection: plug, 5-pole, with phase selection
- Nominal voltage: 230...240V, 50/60Hz, AC

## Dimensions, Weight


- Length: 1250mm
- Width: 442mm
- Height: 71mm
- Weight: 7.0kg

## Service life

- Rated service life: 75000h (L80) at AT = ta max

**Order No.:** 52HN11DB3LLA | **GTIN (EAN):** 4069025445186

**Dimensions:** HB21/Lic-mx,nrrw,25590lm830,DA2

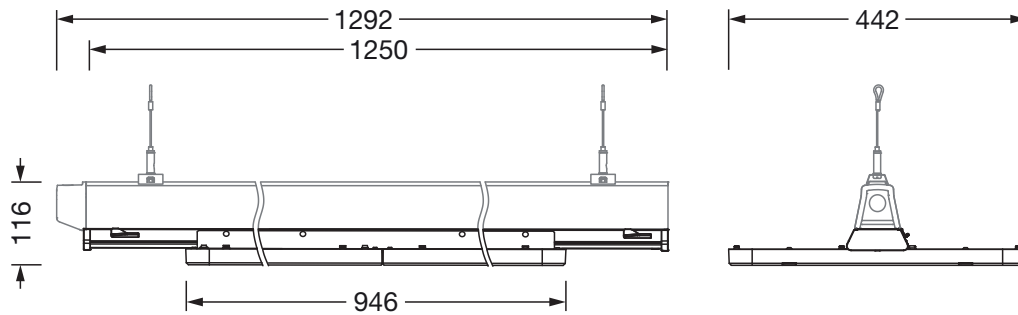

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 15.08.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -