

**Order No.:** 53BM813MV4A5C2 | **GTIN (EAN):** 4069025478719


**Product description:** Mod31G2,Ll,e.nrrw,10710lm840,ML,wh,5su



Modario® 31 Gen.2, luminaire insert, of sheet steel, coil coated, white, length: 1.495mm, width: 81mm, height: 82mm, 5x system unit, system units: 299mm, LED rated luminous flux: 10.710lm, light colour: 840, control gear: ON/OFF Multilumen, control gear: ECG, with plug, 3-pole, with phase selection, mains connection: 220..240V, AC, 50/60Hz, rated input power: 61W, through-wiring accessed according to module size, primary optical cover: cover, of PMMA, light emission: direct distribution, primary light characteristic: symmetric, protection rating (complete): IP20, protection rating (LED compartment): IP50, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, UKCA, impact resistance: IK03, permissible ambient temperature for indoor applications: -35..+40°C, corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting, IP40 when using the optional accessory 5TP9018, packaging unit: 1 piece



Lamps:	LED
Wt. (kg):	1.9
GTIN (EAN):	4069025478719

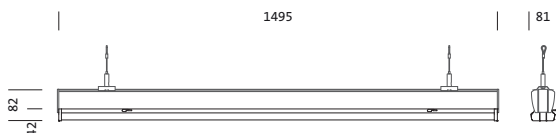

**Order No.:** 53BM813MV4A5C2 | **GTIN (EAN):** 4069025478719

**Detailed technical description:** Mod31G2,LI,e.nrrw,10710lm840,ML,wh,5su



## Key data

- Product type: luminaire insert
- Product name: Modario® 31 Gen.2
- Order No.: 53BM813MV4A5C2

## Lighting technology | Lamps | Control gear

### Component 1

#### Lighting technology:

- Cover: cover, prismatic structure, frosted
- Beam angle: extremely narrow distribution
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis:  $\leq 19$
- UGR viewing direction along lateral luminaire axis:  $\leq 22$

#### Lamps:

- Lamps: with LED
- Rated luminous flux: 10710lm
- Luminous efficacy: 177lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI  $> 80$
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam  $\leq 3$  SDCM (initial)
- Rated input power: 61W

#### Operating device:

- Control gear: ECG
- Control: ON/OFF Multilumen

## Certificates, Standards

- Protection rating: IP20
- Protection rating (lamp compartment): IP50
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK03
- Temperature range (operation):  $-35\ldots+40^{\circ}\text{C}$
- Supplement: corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, reducing of maximum allowable ambient temperature of  $5^{\circ}\text{C}$  with ceiling mounting, IP40 when using the optional accessory 5TP9018
- Certification, designation: CE, ENEC, VDE, UKCA

## Material, Colour

- PS LED insert: sheet steel, coil coated, white, 5x system unit, for tool-free mounting of luminaire in Modario® trunking rail
- Colour specification: white
- Cover: cover of PMMA

## Mounting

- Arrangement: single/continuous arrangement
- Supplement: only suitable for use in indoor areas

## Electrical connection

- Connection: plug, 3-pole, with phase selection
- Nominal voltage: 220..240V, 50/60Hz, AC

## Dimensions, Weight


- System units: 5x SE
- Length: 1495mm
- Width: 81mm
- Height: 82mm
- Weight: 1.9kg

## Service life

- Rated service life: 70000h (L80/B50) at  $\text{AT} = 25^{\circ}\text{C}$ , 70000h (L80/B50) at  $\text{AT} = \text{ta max}$

**Order No.:** 53BM813MV4A5C2 | **GTIN (EAN):** 4069025478719

**Dimensions:** Mod31G2,LI,e.nrrw,10710lm840,ML,wh,5su

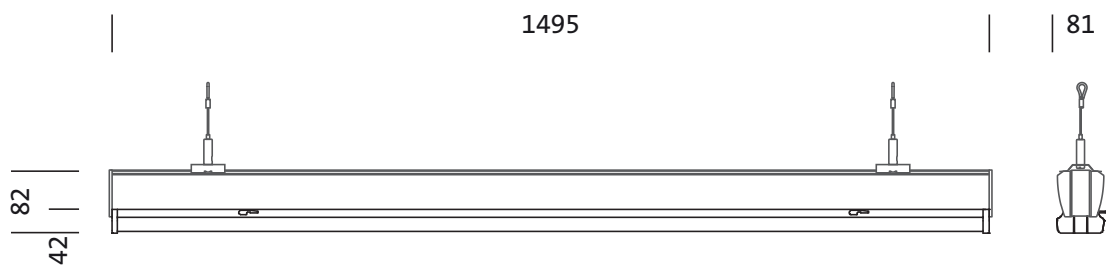

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 27.06.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail [info@siteco.de](mailto:info@siteco.de) • Internet [www.siteco.com](http://www.siteco.com)