

Order No.: 51RF12MB49XG5007 | **GTIN (EAN):** 4069025487827


Product description: TrFI31,LI,wd,9100lm840,ML,wh



Trunking Flex 31, luminaire insert, of aluminium, coated, traffic white (RAL 9016), length: 1.475mm, width: 91mm, height: 53mm, LED rated luminous flux: 9.100lm, light colour: 840, SDCM (Standard Deviation of Colour Matching)MacAdam ≤ 3 SDCM (initial), control gear: ON/OFF Multilumen, with system connector: socket, through-wiring: 7x 2.5mm², mains connection: 220..240V, AC, 50/60Hz, rated input power: 51W, luminous flux adjustable on luminaire in 6 steps (3890/4820/5740/6680/7580/9100lm), connected load according to luminous flux setting (22/27/32/38/43/51W), primary light control with lens, of plastic, primary optical cover: cover, of PMMA, light emission: direct distribution, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, UKCA, impact resistance: IK03, permissible ambient temperature for indoor applications: -25..+45°C, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting, packaging unit: 1 piece

IP 20 IK 03  

Lamps:	LED
Wt. (kg):	1.9
GTIN (EAN):	4069025487827

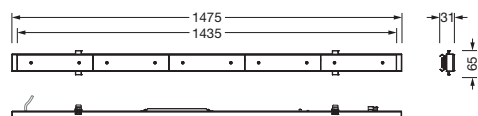

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 29.08.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51RF12MB49XG5007 | **GTIN (EAN):** 4069025487827

Detailed technical description: TrFI31,LI,wd,9100lm840,ML,wh



Key data

- Product type: luminaire insert
- Product name: Trunking Flex 31
- Order No.: 51RF12MB49XG5007

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Light control: lens of plastic
- Cover: cover
- Beam angle: wide distribution
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis: ≤ 25
- UGR viewing direction along lateral luminaire axis: ≤ 25

Lamps:

- Lamps: with LED
- Rated luminous flux: 9100lm
- Luminous efficacy: 180lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 51W
- Supplement: luminous flux adjustable on luminaire in 6 steps (3890/4820/5740/6680/7580/9100lm), connected load according to luminous flux setting (22/27/32/38/43/51W)

Operating device:

- Control: ON/OFF Multilumen

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK03
- Temperature range (operation): -25...+45°C
- Certification, designation: CE, UKCA

Material, Colour

- refurbishment insert: aluminium, coated, traffic white (RAL 9016)
- Quantity: 1 piece
- Colour specification: traffic white (RAL 9016)
- Cover: cover of PMMA

Mounting

- Mounting method, mounting location: slip-in mounting, to the trunking rail
- Arrangement: single/continuous arrangement
- Supplement: only suitable for use in indoor areas

Electrical connection

- Connection: system connector: socket
- Nominal voltage: 220...240V, 50/60Hz, AC
- Through-wiring: 7x 2.5mm²

Dimensions, Weight


- Length: 1475mm
- Width: 91mm
- Height: 53mm
- Weight: 1.9kg

Service life

- Rated service life: 70000h (L80) at AT = 25°C

Order No.: 51RF12MB49XG5007 | **GTIN (EAN):** 4069025487827

Dimensions: TrFI31,LI,wd,9100lm840,ML,wh

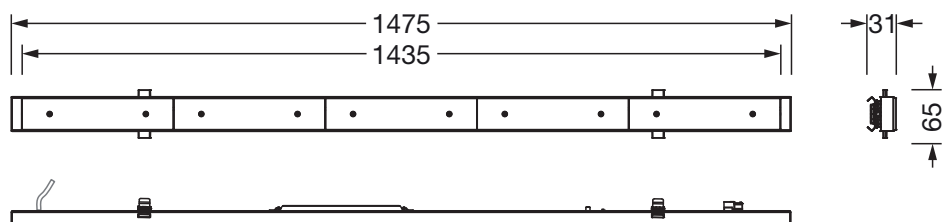

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 29.08.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -