

**Order No.:** 51SE147AD3A | **GTIN (EAN):** 4058352520901


**Product description:** Spot21std,wd,2700lm840,0/1,90,wh



Spot 21 standard, directional spotlight, light control with reflector, of aluminium, beam angle: wide distribution, LED rated luminous flux: 2.700lm, light colour: 840, control gear: ECG, with 3-phase adapter, mains connection: 220..240V, AC, 50/60Hz, housing, of aluminium, white, length: 228mm, diameter: 90mm, adapter, of plastic, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, impact resistance: IK02, packaging unit: 1 piece

IP 20  

Lamps:	LED
Wt. (kg):	1.0
GTIN (EAN):	4058352520901



Order No.: 51SE147AD3A | GTIN (EAN): 4058352520901

Detailed technical description: Spot21 std,wd,2700lm840,0/1,90,wh



#### Key data

- Product type: directional spotlight
- Product name: Spot 21 standard
- Order No.: 51SE147AD3A

#### Lighting technology | Lamps | Control gear

##### Component 1

#### Lighting technology:

- Light control: reflector of aluminium
- Beam angle: wide distribution
- Symmetry: symmetric

#### Lamps:

- Lamps: with LED
- Rated luminous flux: 2700lm
- Colour temperature: 4000K
- Colour rendering index: CRI > 85
- Light colour: 840

#### Operating device:

- Control gear: ECG
- Control: ON/OFF

#### Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK02
- Certification, designation: CE

#### Material, Colour

- housing: aluminium, white
- adapter: plastic

#### Electrical connection

- Connection: 3-phase adapter
- Nominal voltage: 220..240V, 50/60Hz, AC

#### Dimensions, Weight


- Length: 228mm
- Diameter: 90mm
- Weight: 1.0kg

#### Service life

- Rated service life: 50000h (L80/B50) at AT = 25°C

Order No.: 51SE147AD3A | GTIN (EAN): 4058352520901

Dimensions: Spot21std,wd,2700lm840,0/1,90,wh

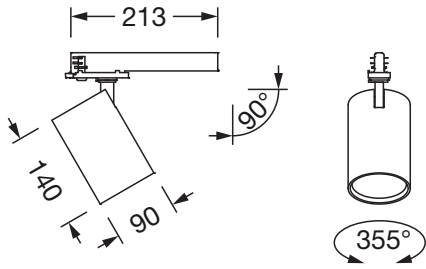

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 22.05.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -