

**Order No.:** 51TM16DN695G | **GTIN (EAN):** 4069025718013

**Product description:** Lic11Pe,wd,9780lm865,DA2,IP40,L1500,wh



Licross 11 Performance MO, luminaire insert, of sheet steel, galvanised, coil coated, white, length: 1.500mm, width: 120mm, height: 123mm, LED rated luminous flux: 9.780lm, light colour: 865, SDCM (Standard Deviation of Colour Matching)MacAdam  $\leq 2$  SDCM (initial), control gear: DALI 2, with plug, 5-pole, with phase selection, mains connection: 220..240V, AC, 50/60Hz, rated input power: 57W, internal wiring halogen-free, primary light control with lens, of plastic, primary optical cover: cover, of PMMA, light emission: direct/indirect distribution, primary light characteristic: symmetric, protection rating (complete): IP40, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, UKCA, protection symbol: D if used in an environment without relevant dust loads with corresponding accessories, impact resistance: IK06, permissible ambient temperature for indoor applications: -25...+35°C, LABS conformity tested according to VDMA 24364:2018-05, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting, corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, The light source and the operating device comply with the requirements of the Ecodesign Regulation (EU) 2019/2020 and are replaceable in accordance with this regulation, packaging unit: 1 piece



|             |               |
|-------------|---------------|
| Lamps:      | LED           |
| Wt. (kg):   | 3.1           |
| GTIN (EAN): | 4069025718013 |



**Order No.:** 51TM16DN695G | **GTIN (EAN):** 4069025718013

**Detailed technical description:** Lic11Pe,wd,9780lm865,DA2,IP40,L1500,wh



#### Key data

- Product type: luminaire insert
- Product name: Licross 11 Performance MO
- Order No.: 51TM16DN695G

#### Lighting technology | Lamps | Control gear

##### Component 1

#### Lighting technology:

- Light control: lens of plastic
- Cover: cover
- Beam angle: wide distribution
- Symmetry: symmetric
- Light emission: direct/indirect distribution, 80:20
- UGR viewing direction along longitudinal luminaire axis:  $\leq 19$
- UGR viewing direction along lateral luminaire axis:  $\leq 22$

#### Lamps:

- Lamps: with LED
- Rated luminous flux: 9780lm
- Luminous efficacy: 172lm/W
- Colour temperature: 6500K
- Colour rendering index: CRI  $> 80$
- Light colour: 865
- SDCM (Standard Deviation of Colour Matching): MacAdam  $\leq 2$  SDCM (initial)
- Rated input power: 57W
- Supplement: internal wiring halogen-free

#### Operating device:

- Control: DALI 2

#### Certificates, Standards

- Protection rating: IP40
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK06
- Protection symbol: D if used in an environment without relevant dust loads with corresponding accessories
- Temperature range (operation): -25...+35°C
- Supplement: corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, reducing of maximum allowable ambient temperature of 5°C with ceiling mounting, LABS conformity tested according to VDMA 24364:2018-05
- Certification, designation: CE, ENEC, VDE, UKCA

#### Material, Colour

- Licross LED insert: sheet steel, galvanised, coil coated, white
- Cover: cover of PMMA

#### Mounting

- Mounting method, mounting location: slip-in mounting, in the Licross trunking rail
- Arrangement: single/continuous arrangement
- Supplement: only suitable for use in indoor areas

#### Electrical connection

- Connection: plug, 5-pole, with phase selection
- Nominal voltage: 220...240V, 50/60Hz, AC

#### Dimensions, Weight


- Length: 1500mm
- Width: 120mm
- Height: 123mm
- Weight: 3.1kg

#### Service life

- Rated service life: 100000h (L90) at AT = ta max, 100000h (L95) at AT = 25°C

**Order No.:** 51TM16DN695G | **GTIN (EAN):** 4069025718013

**Dimensions:** Lic11Pe,wd,9780lm865,DA2,IP40,L1500,wh

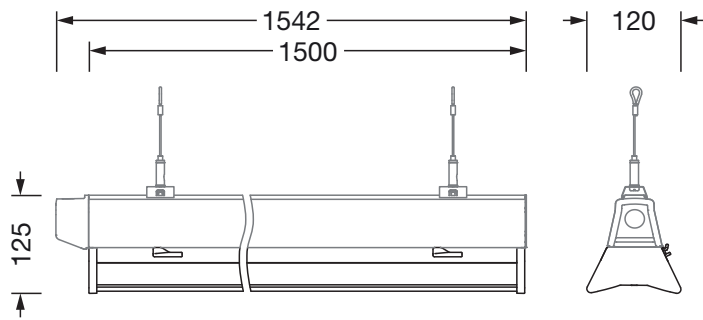

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.com](http://www.siteco.com))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 13.03.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -