

Order No.: 5MB2512L30840 | **GTIN (EAN):** 4052899488809

Product description: Arktika-lum,LED,4000lm840,ECG,dir/ind,SP




Arktika®, office luminaire, primary anti-glare with honeycomb louvre, of plastic, aluminium vaporised, highly specular, light emission: direct/indirect distribution, primary light characteristic: symmetric, installation type: suspended mounting, LED rated luminous flux: 4.000 lm, light colour: 840, colour temperature: 4000K, control gear: ECG, with terminal, 3-pole, mains connection: 220..240V, AC, 50/60Hz, rated input power: 31W, housing, of aluminium, powder-coated, traffic white (RAL 9016), 1-length, length: 1.250 mm, width: 120 mm, height: 8mm, protection rating (complete): IP20, insulation class (complete): insulation class II (safety insulation), certification: CE, packaging unit: 1 piece


IP 20  

4052899488809
5MB2512L30840

LED 4000K / CRI ≥ 80 Φ_{N} 4000 lm

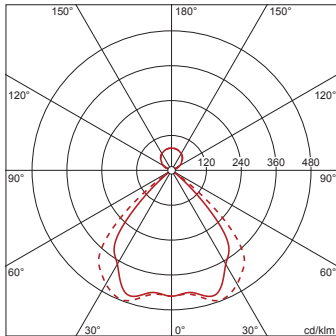

Lamps: LED
Wt. (kg): 1.8
GTIN (EAN): 4052899488809

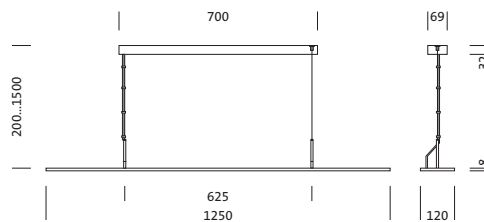

Order No.: 5MB2512L30840 | **GTIN (EAN):** 4052899488809

Detailed technical description: Arktoff-lum,LED,4000lm840,ECG,dir/ind,SP



Key data

- Product type: office luminaire
- Product name: Arktika®
- Order No.: 5MB2512L30840

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Glare reduction: honeycomb louvre of plastic, aluminium vaporised, highly specular
- Beam angle: wide distribution, 95°
- Symmetry: symmetric distribution
- Light emission: direct/indirect distribution
- UGR viewing direction along longitudinal luminaire axis: ≤ 19

Lamps:

- Lamps: with LED
- Rated luminous flux: 4000lm
- Luminous efficacy: 130lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 31W

Operating device:

- Control gear: ECG
- Control: ON/OFF

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class II (safety insulation)
- Certification, designation: CE

Material, Colour

- housing: aluminium, powder-coated, traffic white (RAL 9016), 1-length
- Colour specification: traffic white (RAL 9016)

Mounting

- Mounting method, mounting location: suspended mounting, to the wire suspension, to the ceiling
- Recommended suspension height: 0.2..1.5m

Electrical connection

- Connection: terminal, 3-pole
- Nominal voltage: 220..240V, 50/60Hz, AC

Dimensions, Weight


- Length: 1250mm
- Width: 120mm
- Height: 8mm
- Weight: 1.8kg

Service life

- Rated service life: 50000h (L80/B50) at AT = 25°C

Order No.: 5MB2512L30840 | GTIN (EAN): 4052899488809

Dimensions: Arktoff-lum,LED,4000lm840,ECG,dir/ind,SP

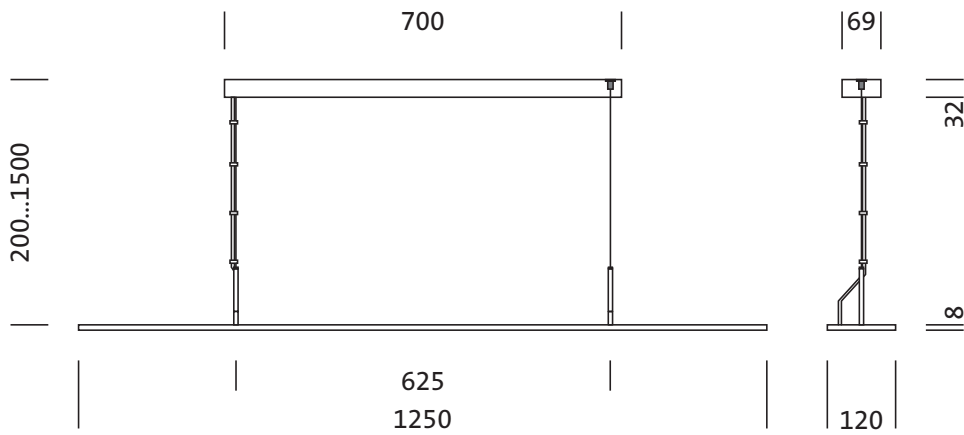

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)
Issued 09.12.2021 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5MB2512L30840 | **GTIN (EAN):** 4052899488809


Planning data: Arktoff-lum,LED,4000lm840,ECG,dir/ind,SP

5MB2512L30840: 1x LED
4000K / CRI ≥ 80

4052899488809

5MB2512L30840

LED 4000K / CRI ≥ 80 ϕ_N 4000 lm

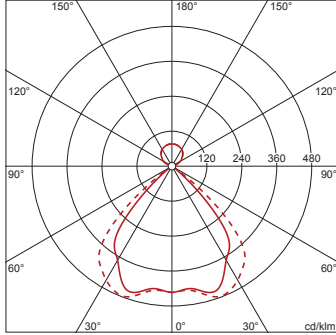

ϕ_{\downarrow} 79% ϕ_{\uparrow} 21%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	197	296
L ₇₀	266	269
L ₆₅	330	308

UGR 18.1 18.7

X 4H Y 8H ρ 70/50/20 S 0.25H

No. of luminaires in room

Reflection factors 70/50/20

Em(lx)	100		200		500	
	2.5	3.0	2.5	3.0	2.5	3.0
20 m ²	0.7	0.7	1.3	1.5	3.3	3.7
30 m ²	1.1	1.2	2.2	2.4	5.5	6.0
40 m ²	1.4	1.5	2.8	3.0	6.9	7.6
50 m ²	1.7	1.8	3.4	3.7	8.4	9.1
75 m ²	2.5	2.7	5.1	5.4	13	13
100 m ²	3.2	3.4	6.5	6.9	16	17
500 m ²	15	16	31	32	77	79

Maintenance factor 0.8

Rh = Lh + 0.5 m