

**Order No.:** 5MT117703WD | **GTIN (EAN):** 4058352219164


**Product description:** Taris,LED5700lm830,0/1,rec



Taris®, office luminaire, primary anti-glare with micro louvre, primary optical cover: axial lens, of PMMA, structured, CAT 2 ( $L \leq 1500 \text{cd/m}^2$ ), light emission: direct distribution, primary light characteristic: symmetric, installation type: recessed, LED rated luminous flux: 5.700 lm, light colour: 830, colour temperature: 3000K, control gear: ECG, with terminal, 5-pole, mains connection: 230V, AC, 50Hz, rated input power: 37W, housing, luminaire housing, of plastic, pure white, length: 1.530 mm, width: 150 mm, height: 76mm, recess depth: 106 mm, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, protection symbol: F, impact resistance: IK02, permissible ambient temperature for indoor applications: 0..+35°C, standard: EN 50419, packaging unit: 1 piece



Lamps: LED  
 Wt. (kg): 4.2  
 GTIN (EAN): 4058352219164

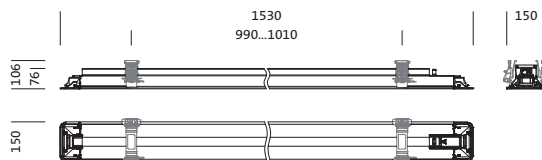

**Order No.:** 5MT117703WD | **GTIN (EAN):** 4058352219164

**Detailed technical description:** Taris,LED5700lm830,0/1,rec



#### Key data

- Product type: office luminaire
- Product name: Taris®
- Order No.: 5MT117703WD

#### Lighting technology | Lamps | Control gear

#### Component 1

#### Lighting technology:

- Cover: axial lens, structured
- Glare reduction: micro louvre
- Beam angle: wide distribution
- Symmetry: symmetric distribution
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis:  $\leq 19$
- UGR viewing direction along lateral luminaire axis:  $\leq 19$

#### Lamps:

- Lamps: with LED
- Rated luminous flux: 5700lm
- Luminous efficacy: 154lm/W
- Colour temperature: 3000K
- Colour rendering index: CRI > 80
- Light colour: 830
- SDCM (Standard Deviation of Colour Matching): MacAdam  $\leq 3$  SDCM (initial)
- Rated input power: 37W

#### Operating device:

- Control gear: ECG
- Control: ON/OFF

#### Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK02
- Protection symbol: F
- Temperature range (operation): 0..+35°C
- Standard: EN 50419
- Certification, designation: CE, ENEC, VDE

#### Material, Colour

- housing: plastic, pure white
- luminaire housing: plastic, pure white
- Colour specification: pure white
- Cover: axial lens of PMMA

#### Mounting

- Mounting method, mounting location: recessed, in the ceiling
- Arrangement: single arrangement

#### Electrical connection


- Connection: terminal, 5-pole
- Nominal voltage: 230V, 230..240V, 50Hz, AC

#### Dimensions, Weight

- Length: 1530mm
- Width: 150mm
- Height: 76mm
- Recess depth: 106mm
- Weight: 4.2kg

Order No.: 5MT117703WD | GTIN (EAN): 4058352219164

Dimensions: Taris,LED5700lm830,0/1,rec

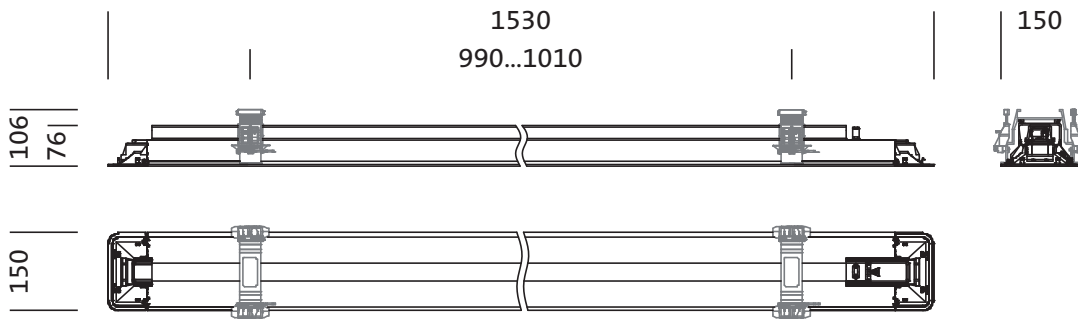

Order No.: 5MT117703WD | GTIN (EAN): 4058352219164


Planning data: Taris,LED5700lm830,0/1,rec

**5MT117703WD: 1x LED**

4058352219164

5MT117703WD

LED 3000 K | CRI ≥ 80  $\phi_{\text{N}}$  5700 lm

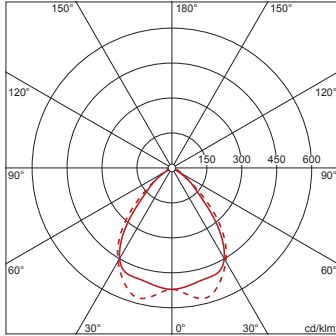

$\phi_{\text{d}}$  100%  $\phi_{\text{r}}$  0%

Luminance values (cd/m<sup>2</sup>)

	C 0/180	C 90/270
L <sub>80</sub>	1186	1761
L <sub>70</sub>	1302	2562
L <sub>65</sub>	1279	2869

UGR 17.5 18.7

X 4H Y 8H  $\rho$  70/50/20 S 0.25H