

**Order No.:** 5TS10250Q | **GTIN (EAN):** 4039806857804


**Product description:** Modario, trunk.rail, 2lg, L2990, 5x2.5<sup>2</sup>, wh



Modario® IP64, trunking rail, of sheet steel, galvanised, coated, pure white, 2-length, length: 2.990 mm, width: 58 mm, height: 43mm, through-wiring: 5x 2.5mm<sup>2</sup>, with terminal, 5-pole, max. 2.5mm<sup>2</sup>, protection rating (complete): IP64, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, standard: EN 60598, packaging unit: 1 piece



Wt. (kg): 3.8  
 GTIN (EAN): 4039806857804

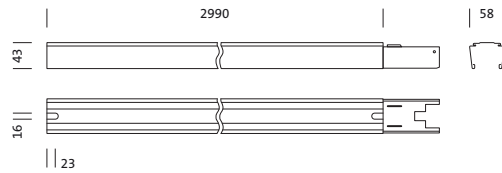

Order No.: 5TS10250Q | GTIN (EAN): 4039806857804

Detailed technical description: Mod64, trunk.rail, 2lg, L2990, 5x2.5<sup>2</sup>, wh



#### Key data

- Product type: trunking components group (TS)
- Product name: Modario® IP64
- Order No.: 5TS10250Q

#### Lighting technology | Lamps | Control gear

#### Component 1

#### Lamps:

- Supplement: for electrical and mechanical plug and socket connection of rail elements

#### Operating device:

- Control: ON/OFF

#### Certificates, Standards

- Protection rating: IP64
- Insulation class: insulation class I (protective earthing)
- Standard: EN 60598
- Certification, designation: CE, ENEC, VDE

#### Material, Colour

- trunking rail: sheet steel, galvanised, coated, pure white, 2-length
- Colour specification: pure white

#### Mounting

- Mounting method, mounting location: suspended mounting, surface-mounted, to the ceiling
- Arrangement: single/continuous arrangement

#### Electrical connection

- Connection: terminal, 5-pole, max. 2.5mm<sup>2</sup>
- Through-wiring: 5x 2.5mm<sup>2</sup>

#### Dimensions, Weight

- System units: 10x SE
- Length: 2990mm
- Width: 58mm
- Height: 43mm
- Mounting distance: max. 3.5m
- Weight: 3.8kg

Order No.: 5TS10250Q | GTIN (EAN): 4039806857804

Dimensions: Mod64, trunk.rail, 2lg, L2990, 5x2.5<sup>2</sup>, wh

