

**Order No.:** 5MX21DD1W4A | **GTIN (EAN):** 4058352305386

**Product description:** Silica,opal,3010lm840,DA,wh,L1440,surf




Silica®, office luminaire, of aluminium, opal, light emission: direct distribution, primary light characteristic: symmetric, installation type: surface-mounted, LED rated luminous flux: 3.010 lm, light colour: 840, colour temperature: 4000K, control gear: ECG DALI, with terminal, 3+2-pole, max. 2.5mm<sup>2</sup>, mains connection: 230V, AC, 50/60Hz, rated input power: 24W, luminaire housing, of aluminium, traffic white (RAL 9016), length: 1.440 mm, width: 64 mm, height: 64mm, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, permissible ambient temperature for indoor applications: 0..+35°C, standard: EN 50419, packaging unit: 1 piece


IP 20  

4058352305386  
5MX21DD1W4A

LED 4000 K | CRI ≥ 80  $\Phi_{\text{lm}}$  3010 lm



Lamps:	LED
Wt. (kg):	3.3
GTIN (EAN):	4058352305386



Order No.: 5MX21DD1W4A | GTIN (EAN): 4058352305386

Detailed technical description: Silica,opal,3010lm840,DA,wh,L1440,surf

#### Key data

- Product type: office luminaire
- Product name: Silica®
- Order No.: 5MX21DD1W4A

#### Lighting technology | Lamps | Control gear

##### Component 1

#### Lighting technology:

- Beam angle: wide distribution
- Symmetry: symmetric distribution
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis:  $\leq 25$
- UGR viewing direction along lateral luminaire axis:  $\leq 25$

#### Lamps:

- Lamps: with LED
- Rated luminous flux: 3010lm
- Luminous efficacy: 123lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam  $\leq 3$  SDCM (initial)
- Rated input power: 24W

#### Operating device:

- Control gear: ECG DALI
- Control: DALI

#### Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Temperature range (operation): 0..+35°C
- Standard: EN 50419
- Certification, designation: CE

#### Material, Colour

- luminaire housing: aluminium, traffic white (RAL 9016)
- Colour specification: traffic white (RAL 9016)

#### Mounting

- Mounting method, mounting location: surface-mounted, to the ceiling
- Arrangement: single arrangement

#### Electrical connection

- Connection: terminal, 3+2-pole, max. 2.5mm<sup>2</sup>
- Nominal voltage: 230V, 220..240V, 50/60Hz, AC

#### Dimensions, Weight


- Length: 1440mm
- Width: 64mm
- Height: 64mm
- Weight: 3.3kg

#### Service life

- Rated service life: 50000h (L85/B50) at AT = 25°C

**Order No.:** 5MX21DD1W4A | **GTIN (EAN):** 4058352305386

**Dimensions:** Silica,opal,3010lm840,DA,wh,L1440,surf

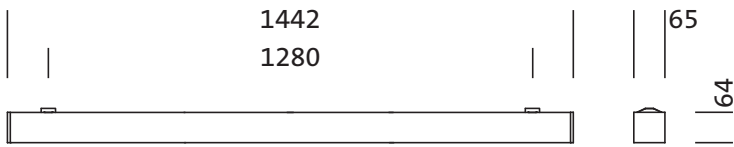

**Order No.:** 5MX21DD1W4A | **GTIN (EAN):** 4058352305386


**Planning data:** Silica,opal,3010lm840,DA,wh,L1440,surf

**5MX21DD1W4A: 1x LED**

4058352305386

5MX21DD1W4A

LED 4000 K | CRI ≥ 80  $\phi_{\text{N}}$  3010 lm



$\phi_{\text{d}}$  100%  $\phi_{\text{r}}$  0%

Luminance values (cd/m<sup>2</sup>)

	C 0/180	C 90/270
L <sub>80</sub>	8005	7782
L <sub>70</sub>	9658	9830
L <sub>65</sub>	10139	10314

UGR 24.8 24.9

X 4H Y 8H  $\rho$  70/50/20 S 0.25H