

Order No.: 5DS11B77V3S | **GTIN (EAN):** 4058352282489


Product description: LDV-s,LED340lm840,0/1,wh



LEDVALUX® S, downlight, optical cover: cover panel, of PMMA, transparent, light emission: direct distribution, LED rated luminous flux: 340lm, light colour: 840, control gear: ECG, with cable, 2x 0.75mm², mains connection: 220..240V, AC, 50..60Hz, installation housing, of aluminium, traffic white (RAL 9016), diameter: 88mm, recess depth: 13mm, ring, of polymer, white, protection rating (complete): IP40, insulation class (complete): insulation class II (safety insulation), certification: CE, protection symbol: F,MM, permissible ambient temperature for indoor applications: -20..+40°C, packaging unit: 1 piece

IP 40 CE

Lamps: LED
 Wt. (kg): 0.2
 GTIN (EAN): 4058352282489



Order No.: 5DS11B77V3S | GTIN (EAN): 4058352282489

Detailed technical description: LDV-s,LED340lm840,0/1,wh



Key data

- Product type: downlight
- Product name: LEDVALUX® S
- Order No.: 5DS11B77V3S

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Cover: cover panel, transparent
- Beam angle: wide distribution, 90°
- Symmetry: rotationally symmetric
- Light emission: direct distribution

Lamps:

- Lamps: with High Power LED, LED
- Rated luminous flux: 340lm
- Luminous efficacy: 81lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- Rated input power: 4.2W

Operating device:

- Control gear: ECG
- Control: ON/OFF

Certificates, Standards

- Protection rating: IP40
- Insulation class: insulation class II (safety insulation)
- Protection symbol: F,MM
- Temperature range (operation): -20..+40°C
- Certification, designation: CE

Material, Colour

- installation housing: aluminium, traffic white (RAL 9016)
- Colour specification: traffic white (RAL 9016)
- ring: polymer, white
- Colour specification: white
- Cover: cover panel of PMMA

Mounting

- Mounting method, mounting location: recessed
- Ø of ceiling cut-out: 68mm

Electrical connection

- Connection: cable, 2x 0.75mm²
- Nominal voltage: 220..240V, 50..60Hz, AC

Dimensions, Weight


- Diameter: 88mm
- Height: 23mm
- Recess depth: 13mm
- Weight: 0.2kg

Service life

- Rated service life: 30000h (L70/B50) at AT = 25°C

Order No.: 5DS11B77V3S | GTIN (EAN): 4058352282489

Dimensions: LDV-s,LED340lm840,0/1,wh

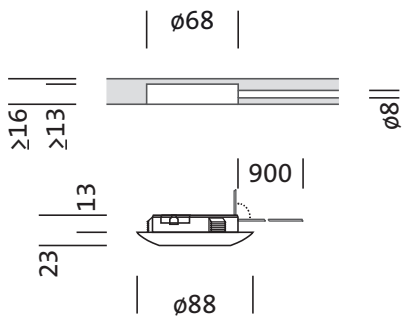

Order No.: 5DS11B77V3S | GTIN (EAN): 4058352282489


Planning data: LDV-s,LED340lm840,0/1,wh

5DS11B77V3S: 1x LED

4058352282489

5DS11B77V3S

LED 4000 K | CRI \geq 80 ϕ_{W} 340 lm



I_{max} 590 cd/klm at γ 5°