

Order No.: 5DS11B77V2R | **GTIN (EAN):** 4058352282458


Product description: LDV-s,LED330lm830,0/1,sr



LEDVALUX® S, downlight, optical cover: cover panel, of PMMA, transparent, light emission: direct distribution, LED rated luminous flux: 330lm, light colour: 830, control gear: ECG, with cable, 2x 0.75mm², mains connection: 220..240V, AC, 50..60Hz, installation housing, of aluminium, grey aluminium (RAL 9007), diameter: 88mm, recess depth: 13mm, ring, of polymer, grey aluminium (RAL 9007), protection rating (complete): IP40, insulation class (complete): insulation class II (safety insulation), certification: CE, protection symbol: F,MM, permissible ambient temperature for indoor applications: -20..+40°C, packaging unit: 1 piece

▼▼ IP 40 □ CE

Lamps:	LED
Wt. (kg):	0.1
GTIN (EAN):	4058352282458



Order No.: 5DS11B77V2R | **GTIN (EAN):** 4058352282458

Detailed technical description: LDV-s,LED330lm830,0/1,sr



Key data

- Product type: downlight
- Product name: LEDVALUX® S
- Order No.: 5DS11B77V2R

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Cover: cover panel, transparent
- Beam angle: wide distribution, 90°
- Symmetry: rotationally symmetric
- Light emission: direct distribution

Lamps:

- Lamps: with High Power LED, LED
- Rated luminous flux: 330lm
- Luminous efficacy: 79lm/W
- Colour temperature: 3000K
- Colour rendering index: CRI > 80
- Light colour: 830
- Rated input power: 4.2W

Operating device:

- Control gear: ECG
- Control: ON/OFF

Certificates, Standards

- Protection rating: IP40
- Insulation class: insulation class II (safety insulation)
- Protection symbol: F,MM
- Temperature range (operation): -20..+40°C
- Certification, designation: CE

Material, Colour

- installation housing: aluminium, grey aluminium (RAL 9007)
- Colour specification: grey aluminium (RAL 9007)
- ring: polymer, grey aluminium (RAL 9007)
- Colour specification: grey aluminium (RAL 9007)
- Cover: cover panel of PMMA

Mounting

- Mounting method, mounting location: recessed
- Ø of ceiling cut-out: 68mm

Electrical connection

- Connection: cable, 2x 0.75mm²
- Nominal voltage: 220..240V, 50..60Hz, AC

Dimensions, Weight


- Diameter: 88mm
- Height: 23mm
- Recess depth: 13mm
- Weight: 0.1kg

Service life

- Rated service life: 30000h (L70/B50) at AT = 25°C

Order No.: 5DS11B77V2R | GTIN (EAN): 4058352282458

Dimensions: LDV-s,LED330lm830,0/1,sr

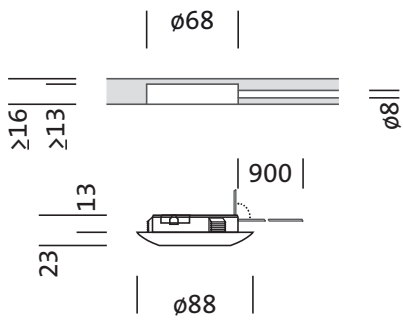

Order No.: 5DS11B77V2R | GTIN (EAN): 4058352282458


Planning data: LDV-s,LED330lm830,0/1,sr

5DS11B77V2R: 1x LED

4058352282458

5DS11B77V2R

LED 3000 K | CRI \geq 80 ϕ_{H} 330 lm



I_{max} 590 cd/klm at γ 5°