

Order No.: 56TL1FCMA | GTIN (EAN): 4058352373873


Product description: LicIntbasemod



Licross®, Interface MD, master, local control installation location: to the Licross® trunking rail, of sheet steel, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, VDE, voltage: 230V, voltage type: AC, 1 x 1 x DALI, 1 x relay contact, packaging unit: 1 piece

 IP 20  

Wt. (kg): 0.5
GTIN (EAN): 4058352373873

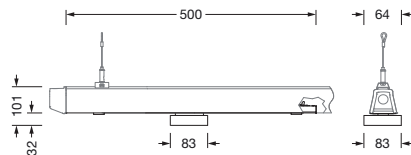

Order No.: 56TL1FCMA | GTIN (EAN): 4058352373873

Detailed technical description: LicIntbasemod



Key data

- Product type: base module
- Product name: Licross® Interface
- Order No.: 56TL1FCMA

Lighting technology | Lamps | Control gear

Component 1

Lamps:

- Supplement: halogen-free wiring

Operating device:

- Control: DALI

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Temperature range (operation): -20..+50°C
- Certification, designation: CE, VDE

Material, Colour

- trunking rail adapter set: sheet steel, coil coated, white
- Colour specification: white

Mounting

- Supplement: for mounting in indoor and outdoor areas

Electrical connection

- Connection: plug, 5-pole, with phase selection
- Nominal voltage: 230V, 50Hz, AC

Dimensions, Weight

- Length: 500mm
- Width: 96mm
- Height: 97mm
- Weight: 0.5kg

Outputs

1x DALI

- Connection: screw terminal, 2-pole, max. 1.5mm²
- Feature: DALI, master function, broadcast addressing, max. 30 DALI ECGs

Order No.: 56TL1FCMA | GTIN (EAN): 4058352373873

Dimensions: Lichtbasemod

