

Order No.: 51FP10DP468H2 | **GTIN (EAN):** 4058352376386

Product description: Mon12em,wd,6050lm840,DA2,PMMA



Monsun® 12 emergency, damp-proof luminaire, chain hanger, primary optical cover: enclosure, of PMMA, light emission: direct distribution, primary light characteristic: symmetric, installation type: suspended mounting, surface-mounted, horizontal mounting, vertical mounting, LED rated luminous flux: 6.050 lm, light colour: 840, colour temperature: 4000K, control gear: ECG DALI, with terminal, 5-pole, max. 2.5mm², mains connection: 220..240V, AC/DC, 0/50..60Hz, rated input power: 35W, luminaire housing, of glass-fibre reinforced polyester, uncoated, bright grey, length: 1.590 mm, width: 90 mm, height: 88mm, clip for enclosure, of stainless steel (V2A), ceiling mounting element, of stainless steel (V2A), chain hanger, of stainless steel (V2A), protection rating (complete): IP66, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, protection symbol: D, impact resistance: IK04, permissible ambient temperature for indoor applications: -25..+40°C, standard: EN 60598-2-22, EN 50419, EN 60598-2-1, no direct snow, no direct sun, no direct rain, for indoor or canopied outdoor use, corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, for animal farming (ammonia tested): for use in cowhouse, pig house, horse-stables... (not for use in poultry stables), AT max for animal farming = 40°C, packaging unit: 1 piece



Lamps: LED
 Wt. (kg): 2.5
 GTIN (EAN): 4058352376386



Order No.: 51FP10DP468H2 | **GTIN (EAN):** 4058352376386

Detailed technical description: Mon12em,wd,6050lm840,DA2,PMMA



Key data

- Product type: damp-proof luminaire
- Product name: Monsun® 12 emergency
- Order No.: 51FP10DP468H2

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Cover: enclosure
- Beam angle: wide distribution
- Symmetry: symmetric distribution
- Light emission: direct distribution

Lamps:

- Lamps: with LED
- Rated luminous flux: 6050lm
- Luminous efficacy: 175lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 35W
- Supplement: for group or central battery, without changeover relay, suitable for emergency light operating devices according to IEC 60598-2-22, halogen-free wiring, luminous flux reduced to approx. 15% with DC operation, without flicker

Operating device:

- Control gear: ECG DALI
- Control: DALI 2

Certificates, Standards

- Protection rating: IP66
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK04
- Protection symbol: D
- Temperature range (operation): -25..+40°C
- Supplement: corresponds to IFS (International Featured Standards) requirements for safety and quality in the food industry, for indoor or canopied outdoor use, no direct snow, no direct sun, no direct rain, for animal farming (ammonia tested): for use in cowhouse, pig house, horse-stables... (not for use in poultry stables), AT max for animal farming = 40°C
- Standard: EN 50419, EN 60598-2-1, EN 60598-2-22
- Certification, designation: CE, ENEC, VDE

Material, Colour

- luminaire housing: glass-fibre reinforced polyester, uncoated, bright grey, incl. chain hanger
- Colour specification: bright grey
- clip for enclosure: stainless steel (V2A)
- Quantity: 10 piece
- ceiling mounting element: stainless steel (V2A), ceiling mounting included
- Quantity: 2 piece
- chain hanger: stainless steel (V2A)
- Quantity: 2 piece
- Cover: enclosure of PMMA

Mounting

- Mounting method, mounting location: suspended mounting, surface-mounted, horizontal mounting, vertical mounting, to the ceiling, to the wall, to the Licross® mounting rail
- Arrangement: single/continuous arrangement
- Supplement: luminaire includes fixing accessories for ceiling surface mounting; for other types of installation: please order mounting accessories separately

Order No.: 51FP10DP468H2 | **GTIN (EAN):** 4058352376386

Detailed technical description: Mon12em,wd,6050lm840,DA2,PMMA



Electrical connection

- Connection: terminal, 5-pole, max. 2.5mm²
- Nominal voltage: 220..240V, 0/50..60Hz, AC/DC

Dimensions, Weight


- Length: 1590mm
- Width: 90mm
- Height: 88mm
- Weight: 2.5kg

Service life

- Rated service life: 50000h (L90/B50) at AT = 25°C, 70000h (L80/B50) at AT = 35°C

Order No.: 51FP10DP468H2 | GTIN (EAN): 4058352376386

Dimensions: Mon12em,wd,6050Im840,DA2,PMMA

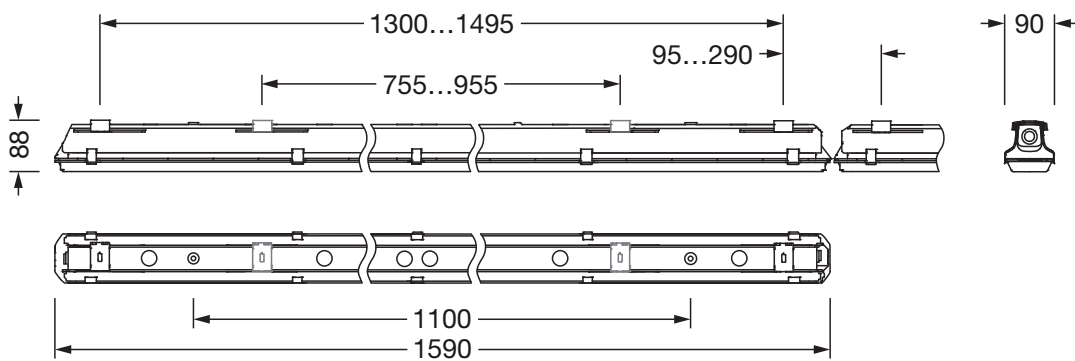

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)
Issued 20.05.2022 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 51FP10DP468H2 | GTIN (EAN): 4058352376386


Planning data: Mon12em,wd,6050lm840,DA2,PMMA

51FP10DP468H2: 1x LED

4058352376386

51FP10DP468H2

LED 4000 K | CRI ≥ 80 ϕ_{th} 6050 lm

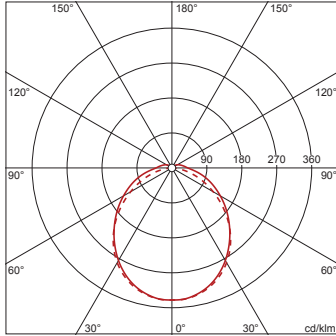

ϕ_{\downarrow} 94% ϕ_{\uparrow} 6%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	7228	6298
L ₇₀	8049	8766
L ₆₅	8431	9662

UGR 25 23.6

X 4H Y 8H ρ 70/50/20 S 0.25H