

Order No.: 5XF1E32N08DA | GTIN (EAN): 4058352468913


Product description: SL31mc,ST1.0a,4900lm730,Plus,N,opt.CLO



Streetlight 31, mast luminaire, primary light control with lens, of PMMA, primary optical cover: cover, of toughened safety glass, transparent, light distribution: ST1.0a, light emission: direct distribution, primary light characteristic: asymmetric, installation type: post-top, side-entry, LED High Power LED, rated luminous flux: 4.900 lm, light colour: 730, colour temperature: 3000K, control gear: ECG Plus, control: overheat protection, power reduction, digital communication interface, constant luminous flux control, time-dependent luminous flux control, flexible luminous flux parameterisation, mains connection: 220..240V, AC, 50/60Hz, rated input power: 35W, luminaire housing, of diecast aluminium, powder-coated, Siteco® metallic grey (DB 702S), length: 448 mm, width: 220 mm, height: 87mm, protection rating (complete): IP66, insulation class (complete): insulation class II (safety insulation), certification: CE, ENEC, ENEC+, impact resistance: IK08, permissible ambient temperature for outdoor applications: -30..+50°C, standard-compliant lighting for roads and squares, packaging unit: 1 piece

IP 66 IK 08 □ CE

|             |               |
|-------------|---------------|
| Lamps:      | LED           |
| Wt. (kg):   | 3.6           |
| GTIN (EAN): | 4058352468913 |

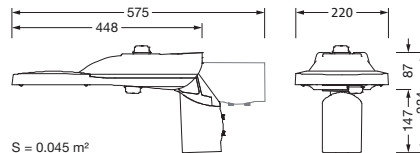

Order No.: 5XF1E32N08DA | GTIN (EAN): 4058352468913

Detailed technical description: SL31mc,ST1.0a,4900lm730,Plus,N,opt.CLO



### Key data

- Product type: mast luminaire
- Product name: Streetlight 31 micro
- Order No.: 5XF1E32N08DA

### Lighting technology | Lamps | Control gear

#### Component 1

#### Lighting technology:

- Light control: lens of PMMA
- Cover: cover, transparent
- Light distribution: ST1.0a
- Beam angle: wide distribution
- Symmetry: asymmetric distribution
- Light emission: direct distribution

#### Lamps:

- Lamps: with High Power LED, LED
- Rated luminous flux: 4900lm
- Luminous efficacy: 140lm/W
- Colour temperature: 3000K
- Colour rendering index: CRI > 70
- Light colour: 730
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 5 SDCM (initial)
- Rated input power: 35W

#### Operating device:

- Control gear: ECG Plus
- Control: Plus, Nema
- Equipment: overheat protection, power reduction, digital communication interface, constant luminous flux control, time-dependent luminous flux control, flexible luminous flux parameterisation

#### Certificates, Standards

- Protection rating: IP66
- Insulation class: insulation class II (safety insulation)
- Impact resistance: IK08
- Temperature range (operation): -30..+50°C
- Supplement: standard-compliant lighting for roads and squares
- Certification, designation: CE, ENEC, ENEC+

### Material, Colour

- luminaire housing: diecast aluminium, powder-coated, Siteco® metallic grey (DB 702S), inclination adjustable at 0°, 5°, 10°, 15° (post-top) | 0°, -5°, -10°, -15°, -20° (side-entry)
- Colour specification: Siteco® metallic grey (DB 702S)
- Cover: cover of toughened safety glass

### Mounting

- Mounting method, mounting location: side-entry, post-top, on mast

### Electrical connection

- Nominal voltage: 220..240V, 50/60Hz, AC
- Surge voltage resistance: 10kV 1.2/50µs

### Dimensions, Weight

- Length: 448mm
- Width: 220mm
- Height: 87mm
- Weight: 3.6kg

### Light emission

- Light emission: 0% at 0° inclination

### Service life

- Rated service life: 100000h (L90) at AT = 25°C

Order No.: 5XF1E32N08DA | GTIN (EAN): 4058352468913

Dimensions: SL31mc,ST1.0a,4900Im730,Plus,N,opt.CLO

