

Order No.: 5LZ910MDL401 | GTIN (EAN): 4058352467428


Product description: SCon31,LED,DALI,PC,dir,rec



SITECO Connect 31, MOVE, downlight, light control with reflector, highly specular, optical cover: diffuser disc, of PC, CAT 2, light emission: direct distribution, LED rated luminous flux: 1.120lm, light colour: 840, control gear: ECG DALI, mains connection: 220..240V, AC, 50/60Hz, downlight, of PC, diameter: 172mm, controller, sensor, protection rating (complete): IP20, insulation class (complete): insulation class II (safety insulation), certification: CE, ENEC, VDE, permissible ambient temperature for indoor applications: -10..+40°C, permissible storage temperature: -20..+80°C, standard: EN 60598-2-22, packaging unit: 1 set



Lamps: LED
 Wt. (kg): 6.3
 GTIN (EAN): 4058352467428

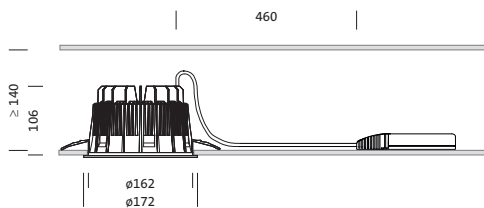

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.com)
 Issued 09.12.2021 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5LZ910MDL401 | GTIN (EAN): 4058352467428

Detailed technical description: SCon31,LED,DALI,PC,dir,rec



Key data

- Product type: downlight
- Product name: SITECO Connect 31 MOVE
- Order No.: 5LZ910MDL401

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Light control: reflector, highly specular
- Cover: diffuser disc
- Beam angle: wide distribution
- Symmetry: rotationally symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis: ≤ 19
- UGR viewing direction along lateral luminaire axis: ≤ 19

Lamps:

- Lamps: with LED
- Rated luminous flux: 1120lm
- Luminous efficacy: 102lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI > 80
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 11W

Operating device:

- Control gear: ECG DALI
- Control: DALI

Certificates, Standards

- Protection rating: IP20
- Protection rating (on room side): IP54
- Insulation class: insulation class II (safety insulation)
- Temperature range (operation): -10..+40°C
- Standard: EN 60598-2-22
- Certification, designation: CE, ENEC, VDE

Material, Colour

- downlight: PC
- Quantity: 5 piece
- Quantity: 1 piece
- Quantity: 1 piece
- Cover: diffuser disc of PC

Mounting

- Mounting method, mounting location: recessed
- \varnothing of ceiling cut-out: 162mm

Electrical connection

- Nominal voltage: 220..240V, 50/60Hz, AC

Dimensions, Weight

- Diameter: 172mm
- Height: 108mm
- Weight: 6.3kg

Service life

- Rated service life: 50000h (L80/B50) at AT = 25°C

Order No.: 5LZ910MDL401 | GTIN (EAN): 4058352467428

Dimensions: SCon31,LED,DALI,PC,dir,rec

