


Order No. OSRAM: 4050737959054 | Order No. Siteco: 5XA582431A08

Product description: SL10md,ST1.2P1.0,LED10500lm750,Basic



Streetlight 10 midi LED, mast luminaire, primary light control with 3 zone faceted reflector, of plastic, silver coated, primary optical cover: cover, of PMMA, transparent, light distribution: ST1.2P1.0, light emission: direct distribution, primary light characteristic: asymmetric, installation type: post-top, side-entry, LED, LED High Power, rated luminous flux: 10.500lm, luminous efficacy: 122lm/W, light colour: 750, colour temperature: 5000K, control gear: ECG Basic, control: overheat protection, power reduction, electronic power reduction, with terminal, 5-pole, max. 2.5mm<sup>2</sup>, mains connection: 220..240V, AC, 50/60Hz, start of lifetime: 86W, end of lifetime: 86W, reduction: 41W, luminaire housing, of diecast aluminium, powder-coated, Siteco® metallic grey (DB 702S), length: 800mm, width: 387mm, height: 168mm, spigot size: 60/76mm (post-top) and 42/60mm (side-entry), mast flange for spigot size: 42mm: 5XA58100XM4, 60mm: 5XA58100XM2, 76mm: 5XA58100XM1, protection rating (complete): IP66, insulation class (complete): insulation class II (safety insulation), certification: CE, ENEC, VDE, permissible operating ambient temperature for outdoor applications: -25..+50°C, standard-compliant lighting for roads and squares, packaging unit: 1 piece

4050737959054  
5XA582431A08

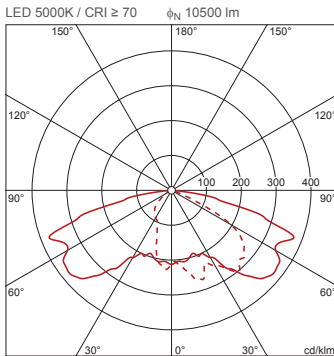

Lamps: LED  
Wt. (kg): 11.4  
GTIN (EAN): 4050737959054

siteco AN OSRAM BUSINESS 5XA582431A08

The luminaire contains built-in LED lamps

A++  
A+  
A  
B  
C  
D  
E  
F

LED

The LED-lamps cannot be changed in the luminaire

874/2012

