

## Photometric test report

Family  
**MUSHROOM LUMINAIRE LED**

Order number: **5XA5235LF14H + 5XA54000XSA**  
EAN: **4058352833209 + 4058352161326**

LP number  
**59265\_24**



**Version** post-top- or mounting to wall arm, spreader element, amber  
**Optic** asymmetric, extremely wide distribution (P1.0a)  
**Cover** cover transparent, PMMA  
**Lamps** LED 4000 K | CRI ≥ 70  
**Controlgear** ECG SITECO iQ  
**Rated values** Net luminous flux = 1070 lm  
Power consumption = 10.0 W  
Luminous efficacy = 107 lm/W

serial  
documentation  
07.07.2022

siteco

Luminous intensity in cd/klm


C180-0

C195-15

C200-20

C270-90

Imax: 566 cd/klm

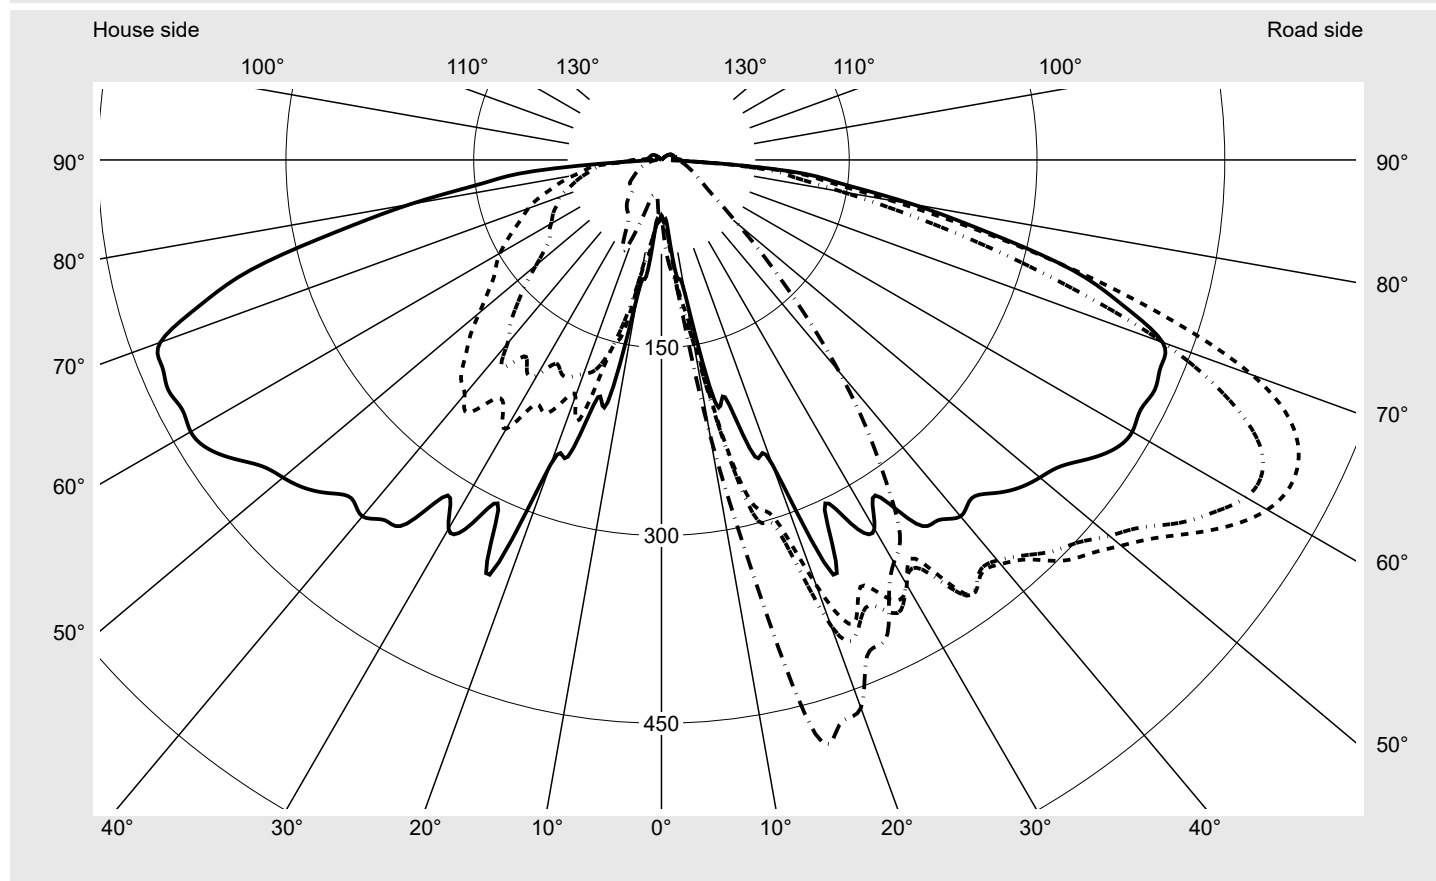

### Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	96.3%
Eta 90° - 180°	3.7%

### Luminous intensity class acc. to EN13201-2

Class:	---
Imax 70°	544.6
Imax 80°	222.8
Imax 90°	23.4
Imax >90°	14.5
Imax >95°	12.4


### Measurement conditions

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> MUSHROOM LUMINAIRE LED	<b>Order number:</b> 5XA5235LF14H + 5XA54000XSA <b>EAN:</b> 4058352833209 + 4058352161326	<b>LP number</b> 59265_24
---	--	------------------------------

**Envelope curve in cd/klm**      **KMK 62.5°**   **KMK 60°**   **KMK 57.5°**   **KMK 55°**      **siteco**

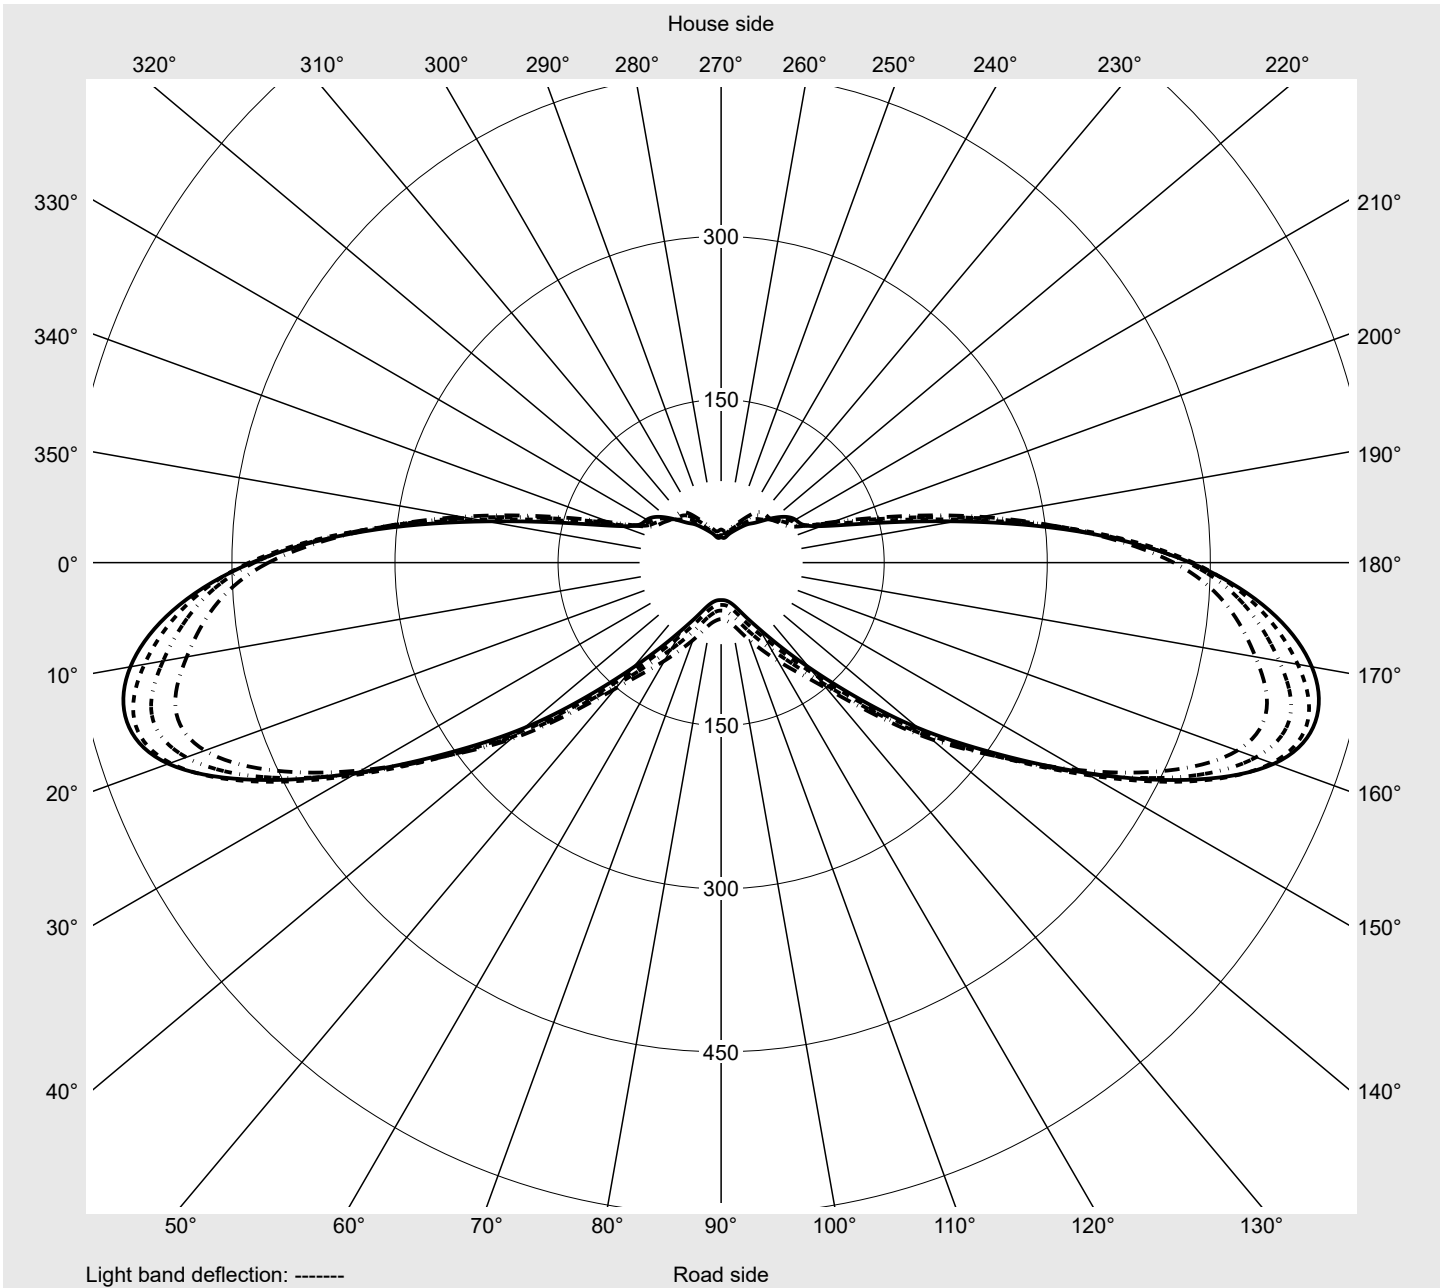

## Photometric test report

<b>Family</b> <b>MUSHROOM LUMINAIRE LED</b>	<b>Order number: 5XA5235LF14H + 5XA54000XSA</b> <b>EAN: 4058352833209 + 4058352161326</b>	<b>LP number</b> <b>59265_24</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	44.2	44.2	44.2	44.2	44.2	44.2	44.2	44.2	44.2	44.2	44.2	44.2	44.2
2,5°	49.7	48.7	49.6	50.6	51.7	52.5	53.4	54.4	55.1	56.3	57.9	59.3	60.9
5,0°	52.8	54.4	56.8	59.7	63.1	66.3	69.9	73.6	77.5	79.2	78.7	78.8	79.7
7,5°	94.0	97.2	100.9	106.4	112.9	120.0	120.7	120.6	122.1	124.3	126.6	129.5	128.3
10,0°	109.0	116.6	130.9	139.7	149.7	166.6	178.6	185.6	192.9	201.2	198.5	198.5	202.6
12,5°	198.1	214.1	218.8	226.0	231.4	249.1	265.3	273.9	289.0	294.9	303.7	307.7	322.9
15,0°	196.2	230.9	267.6	285.8	298.5	320.4	325.8	325.8	349.0	374.8	382.5	391.4	398.5
17,5°	248.5	275.2	280.3	299.9	310.5	348.3	370.7	384.4	418.2	438.6	457.4	471.6	463.9
20,0°	258.8	293.2	328.3	361.3	395.9	415.9	430.9	446.3	446.4	447.6	465.4	461.0	474.9
22,5°	358.6	366.3	385.5	401.0	408.4	407.7	421.4	428.4	441.7	447.8	458.5	449.7	451.5
25,0°	308.5	336.7	359.7	376.2	392.6	398.5	401.1	404.9	414.8	405.4	424.1	421.8	424.9
27,5°	327.2	352.7	382.5	395.7	408.1	409.2	413.9	416.6	412.7	409.1	409.5	405.3	400.7
30,0°	340.2	370.3	385.2	392.0	390.5	391.2	389.9	388.7	386.5	382.5	379.0	372.7	368.0
32,5°	317.8	348.0	372.7	377.7	388.0	398.3	405.1	402.9	390.4	377.4	357.2	345.0	328.7
35,0°	354.7	390.7	416.5	423.4	424.9	421.1	408.0	389.7	368.3	353.4	329.1	310.2	298.8
37,5°	362.8	394.6	414.3	418.4	416.4	409.6	396.7	376.1	352.8	331.9	308.0	281.0	264.8
40,0°	371.7	397.0	417.7	421.5	417.6	411.3	392.4	368.7	339.4	311.8	282.1	251.9	232.3
42,5°	366.6	401.3	422.6	432.9	428.5	414.8	387.8	359.1	325.9	289.1	256.3	223.5	204.7
45,0°	376.4	419.6	442.0	452.8	442.0	419.2	383.1	343.0	303.5	264.6	229.9	198.6	179.8
47,5°	387.6	432.3	452.7	465.2	452.1	423.6	380.6	329.2	287.3	242.6	203.3	175.7	158.0
50,0°	394.7	435.3	463.9	479.4	467.2	429.8	377.2	319.7	276.1	222.1	180.9	155.3	137.3
52,5°	402.0	449.2	479.4	496.3	482.3	437.8	375.7	311.2	261.3	206.9	162.6	137.3	118.7
55,0°	416.4	468.1	499.1	519.5	505.4	452.6	381.9	311.1	252.9	195.5	151.3	123.6	104.3
57,5°	429.4	486.2	521.3	542.1	523.6	466.4	387.9	310.6	248.4	188.9	143.8	112.9	92.1
60,0°	434.3	498.1	538.7	558.9	539.1	476.1	391.4	311.0	243.0	182.4	135.2	102.7	80.5
62,5°	431.7	506.4	551.8	565.9	541.0	472.8	386.5	304.6	236.7	173.8	126.2	93.1	70.7
65,0°	434.8	518.1	562.8	561.7	524.5	452.5	365.9	289.3	225.7	164.7	117.0	83.8	61.8
67,5°	431.7	525.2	565.3	543.6	484.7	408.4	326.5	258.7	204.5	151.5	105.9	73.4	53.0
70,0°	426.1	513.1	544.6	502.3	426.7	347.7	273.4	217.2	176.9	135.8	94.6	64.3	45.8
72,5°	386.8	465.8	483.3	429.4	348.4	275.0	214.2	172.1	143.2	115.0	81.9	55.1	39.4
75,0°	339.9	396.0	401.1	343.8	272.5	213.3	165.7	132.8	112.0	93.2	68.8	47.0	34.0
77,5°	267.0	310.2	307.5	258.5	203.0	157.7	124.6	100.4	83.8	71.5	55.6	39.7	29.6
80,0°	203.9	222.8	218.4	185.4	146.8	114.6	92.1	75.0	62.2	54.1	44.2	33.6	26.1
82,5°	144.9	156.2	153.7	134.3	107.6	84.8	69.7	57.5	47.6	41.7	35.7	28.7	23.5
85,0°	102.3	107.4	106.9	96.5	79.5	63.6	53.2	44.8	37.5	33.1	29.4	25.1	21.3
87,5°	16.9	17.9	17.9	17.6	17.3	16.9	16.7	16.5	16.6	16.7	16.6	16.4	16.1
90,0°	13.8	13.8	13.9	14.0	14.1	14.2	14.3	14.4	14.7	15.0	15.2	15.2	15.0
92,5°	11.7	12.1	12.5	12.7	12.9	13.1	13.3	13.5	13.9	14.3	14.5	14.4	14.4
95,0°	11.0	11.4	11.7	11.9	12.1	12.3	12.4	12.6	12.8	12.8	12.8	12.8	12.8
97,5°	10.6	10.9	11.2	11.4	11.6	11.7	11.8	11.9	12.0	12.1	12.1	12.2	12.2
100,0°	10.2	10.6	10.8	11.0	11.2	11.3	11.4	11.5	11.6	11.7	11.8	11.8	11.9
102,5°	10.0	10.2	10.5	10.7	10.8	11.0	11.1	11.2	11.3	11.4	11.5	11.5	11.6
105,0°	9.6	10.0	10.2	10.4	10.6	10.7	10.8	10.9	11.0	11.1	11.2	11.3	11.3
107,5°	9.4	9.7	9.9	10.1	10.3	10.4	10.5	10.6	10.7	10.8	10.9	11.0	11.0
110,0°	9.2	9.4	9.7	9.9	10.0	10.2	10.3	10.4	10.5	10.6	10.7	10.8	10.8
112,5°	8.8	9.2	9.4	9.6	9.8	9.9	10.0	10.1	10.2	10.3	10.4	10.5	10.6

## Photometric test report

<b>Family</b> <b>MUSHROOM LUMINAIRE LED</b>	<b>Order number: 5XA5235LF14H + 5XA54000XSA</b> <b>EAN: 4058352833209 + 4058352161326</b>	<b>LP number</b> <b>59265_24</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
0,0°	44.2	44.2	44.2	44.2	44.2	44.2	44.2	44.2	44.2	44.2	44.2	44.2	44.2
2,5°	62.8	64.6	66.0	67.3	68.2	68.5	47.4	46.9	46.4	45.8	45.3	44.7	44.3
5,0°	80.6	82.4	84.0	86.9	87.0	88.6	52.1	52.0	52.6	54.9	58.0	58.1	55.5
7,5°	128.6	126.4	121.0	117.8	116.2	116.1	88.4	81.1	75.6	69.0	62.4	58.1	58.4
10,0°	206.1	214.0	216.6	213.6	219.0	222.8	100.8	94.2	88.2	91.2	88.9	74.7	68.1
12,5°	333.2	338.3	345.5	345.4	341.6	340.9	184.3	164.0	141.6	125.7	112.8	90.4	85.6
15,0°	416.3	439.8	458.8	470.7	476.5	474.5	179.3	164.3	159.1	157.3	145.7	129.9	118.8
17,5°	470.8	470.7	474.4	471.9	467.9	473.0	236.1	219.0	217.4	176.0	175.9	161.2	136.8
20,0°	473.2	480.0	488.2	475.6	467.9	465.8	250.6	215.4	201.0	181.8	159.2	136.8	115.6
22,5°	440.4	430.1	427.8	430.9	431.3	429.0	288.2	242.0	210.7	187.3	154.1	131.6	114.7
25,0°	422.7	418.2	416.5	423.0	423.0	423.1	286.2	264.6	222.7	188.6	154.4	120.8	99.4
27,5°	392.5	390.5	387.9	391.8	393.5	393.6	288.1	253.9	220.9	183.4	156.2	132.2	105.3
30,0°	361.4	361.8	361.5	365.7	369.7	371.3	317.4	287.4	247.9	198.6	153.6	126.6	101.2
32,5°	322.1	328.4	336.2	344.1	350.6	354.6	295.2	263.3	235.1	200.1	165.6	128.0	96.3
35,0°	291.8	293.9	298.9	303.7	308.8	312.0	320.3	280.4	233.4	191.5	151.6	118.4	93.4
37,5°	259.1	259.9	262.1	264.5	266.8	267.6	333.8	297.7	254.5	208.7	160.8	119.9	91.5
40,0°	225.7	225.1	223.0	222.2	221.1	220.7	336.8	296.3	244.6	191.3	144.8	108.4	87.5
42,5°	197.1	192.3	187.2	181.7	177.1	174.9	337.7	291.6	237.1	178.9	131.8	101.4	83.6
45,0°	168.9	161.1	152.4	143.6	137.3	135.1	339.2	285.9	221.5	163.0	118.5	92.2	80.3
47,5°	144.2	134.5	122.9	113.4	106.5	104.1	342.1	277.6	207.0	147.2	105.9	85.6	77.8
50,0°	122.2	110.5	98.2	88.4	82.2	79.7	339.3	268.7	189.8	130.6	94.2	77.9	72.9
52,5°	103.7	90.7	79.0	70.3	65.3	63.6	331.3	255.2	175.3	117.4	83.8	71.1	67.2
55,0°	88.4	75.8	65.0	57.4	53.5	51.9	332.0	242.8	163.6	108.8	78.8	68.4	64.6
57,5°	76.0	63.4	53.7	48.1	44.9	44.1	334.8	236.7	156.5	106.2	80.2	71.8	66.7
60,0°	65.5	53.8	45.8	41.3	39.3	38.9	335.3	226.9	148.8	101.8	82.0	75.8	70.2
62,5°	56.1	45.7	39.5	36.2	34.7	34.4	329.7	218.7	139.2	98.2	82.8	78.9	73.3
65,0°	48.9	39.8	34.9	32.5	31.5	31.4	321.6	204.9	129.3	94.3	83.2	80.6	74.7
67,5°	41.9	34.9	31.1	29.2	28.6	28.6	311.6	193.3	120.4	89.4	80.3	78.2	72.5
70,0°	36.2	30.8	27.9	26.6	26.2	26.2	298.1	181.1	113.2	86.5	79.9	78.4	72.1
72,5°	31.4	27.4	25.3	24.3	24.0	23.9	271.7	165.7	103.8	79.3	74.5	74.1	69.0
75,0°	27.6	24.6	23.0	22.3	22.1	22.0	239.0	145.6	92.1	72.8	69.9	70.6	65.7
77,5°	24.6	22.2	21.0	20.5	20.2	20.1	199.3	127.9	82.3	66.9	66.0	67.1	61.8
80,0°	22.0	20.2	19.2	18.8	18.5	18.4	155.0	105.4	70.8	60.2	61.3	62.0	56.3
82,5°	20.3	18.7	17.8	17.4	17.2	17.0	116.9	85.1	61.4	54.4	56.2	56.7	51.1
85,0°	19.0	17.5	16.7	16.3	16.0	15.9	85.3	65.8	51.0	46.7	48.3	47.9	42.1
87,5°	15.6	14.8	14.5	14.3	14.2	14.2	19.2	21.1	24.4	29.4	32.4	31.5	27.5
90,0°	14.8	14.2	13.8	13.6	13.5	13.5	14.6	16.4	19.1	22.5	23.4	21.9	18.5
92,5°	14.2	13.7	13.3	13.2	13.1	13.0	11.3	10.8	10.2	9.7	9.2	8.6	8.1
95,0°	12.7	12.7	12.7	12.7	12.7	12.7	10.6	10.1	9.5	9.0	8.5	8.0	7.5
97,5°	12.3	12.2	12.3	12.3	12.3	12.4	10.1	9.7	9.3	8.8	8.3	7.8	7.4
100,0°	11.9	12.0	12.0	12.1	12.1	12.1	9.8	9.4	9.0	8.5	8.1	7.6	7.2
102,5°	11.6	11.6	11.7	11.8	11.8	11.7	9.5	9.2	8.8	8.3	7.9	7.4	7.0
105,0°	11.4	11.5	11.5	11.5	11.5	11.5	9.3	8.9	8.5	8.1	7.7	7.3	6.9
107,5°	11.1	11.2	11.2	11.2	11.3	11.3	9.0	8.7	8.3	8.0	7.5	7.2	6.7
110,0°	10.9	10.9	11.0	11.0	11.1	11.1	8.8	8.5	8.1	7.8	7.4	7.0	6.7
112,5°	10.7	10.7	10.8	10.8	10.8	10.8	8.6	8.3	7.9	7.6	7.3	6.9	6.5

## Photometric test report

<b>Family</b> <b>MUSHROOM LUMINAIRE LED</b>	<b>Order number: 5XA5235LF14H + 5XA54000XSA</b> <b>EAN: 4058352833209 + 4058352161326</b>	<b>LP number</b> <b>59265_24</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	44.2	44.2	44.2	44.2	44.2	44.2	44.2	44.2	44.2	44.2	44.2	0.1	0.1
2,5°	44.0	43.7	43.4	43.1	43.1	43.2	43.8	44.2	44.4	44.3	44.2	0.6	0.7
5,0°	52.5	50.3	48.6	46.8	44.8	42.4	39.3	36.7	35.0	34.1	33.8	1.5	2.1
7,5°	54.3	53.2	52.0	47.4	42.9	39.0	35.7	32.2	29.9	28.9	28.5	3.1	5.2
10,0°	67.5	71.1	66.0	47.8	38.0	34.4	32.2	30.8	29.6	29.0	28.8	5.8	11.0
12,5°	77.3	72.7	71.1	62.4	50.7	39.1	35.0	31.0	28.4	28.4	29.0	11.0	22.1
15,0°	108.6	92.6	78.2	69.0	58.1	50.6	45.9	39.5	34.6	31.7	31.5	16.4	38.5
17,5°	119.8	101.3	90.7	79.5	68.0	61.8	55.9	49.9	43.8	43.3	43.2	21.6	60.0
20,0°	102.1	91.9	83.6	76.0	73.1	67.4	66.8	59.0	55.7	60.4	63.0	25.7	85.7
22,5°	100.3	86.3	77.5	72.2	70.8	69.3	68.0	64.1	65.0	71.5	78.2	28.9	114.6
25,0°	88.9	72.3	66.0	63.0	63.6	66.6	67.5	65.1	66.9	70.3	72.2	30.4	145.0
27,5°	84.3	69.4	61.3	56.3	57.2	59.9	60.9	56.1	57.6	57.4	59.5	32.7	177.7
30,0°	82.2	68.0	60.6	56.4	56.5	56.0	55.2	53.6	50.6	51.4	52.6	34.2	211.9
32,5°	76.7	66.5	61.1	58.4	57.0	56.5	54.0	51.6	46.8	48.3	49.9	35.4	247.3
35,0°	73.9	62.2	58.5	57.5	57.7	56.5	52.8	50.5	44.3	46.7	48.0	37.2	284.5
37,5°	75.8	68.4	61.8	56.9	54.9	53.8	51.6	48.5	43.3	44.5	45.5	38.1	322.6
40,0°	74.5	69.7	66.9	61.5	55.4	51.1	46.8	44.4	39.9	40.8	41.9	38.3	360.9
42,5°	73.6	69.7	66.0	60.6	56.9	51.0	45.1	41.0	36.8	37.0	35.5	38.3	399.3
45,0°	73.3	70.0	66.0	59.8	52.9	46.7	41.7	37.7	34.1	32.7	32.6	38.3	437.6
47,5°	73.5	69.6	66.0	60.2	52.2	45.1	39.5	34.7	32.5	30.1	33.1	38.3	475.9
50,0°	69.2	67.4	65.7	61.6	52.6	44.6	38.8	35.0	30.8	29.8	31.9	38.3	514.2
52,5°	64.6	63.8	63.5	60.0	51.5	43.8	37.8	34.8	30.8	30.2	31.7	38.4	552.7
55,0°	61.2	60.2	59.7	56.4	49.2	42.2	36.7	32.9	29.6	29.2	30.4	39.2	591.8
57,5°	61.1	57.7	56.3	52.5	46.0	39.3	34.2	30.7	27.6	26.9	27.7	40.2	632.0
60,0°	62.9	56.0	52.4	48.0	42.0	36.6	32.1	28.7	25.5	24.6	25.3	41.0	673.0
62,5°	64.2	54.8	47.8	43.3	38.3	33.8	30.2	27.0	23.8	22.8	23.3	41.3	714.3
65,0°	65.2	53.7	43.5	38.9	34.9	31.2	28.0	25.4	22.2	21.1	21.3	40.9	755.2
67,5°	63.2	51.6	39.7	34.3	31.1	28.4	25.8	23.2	20.4	19.1	19.3	39.4	794.6
70,0°	62.9	50.9	36.2	30.0	27.4	25.3	23.1	21.1	18.7	17.2	17.6	36.9	831.6
72,5°	60.5	48.8	33.3	26.6	24.2	22.5	20.6	18.9	16.7	15.3	15.4	32.6	864.2
75,0°	57.7	46.6	30.1	23.4	21.5	19.9	18.2	16.8	14.9	13.5	13.5	27.8	891.9
77,5°	54.0	43.4	27.5	20.6	18.7	17.4	16.0	14.5	13.0	11.7	11.5	22.6	914.5
80,0°	48.9	39.1	23.4	17.6	16.0	14.8	13.5	12.3	11.0	9.9	9.7	17.8	932.3
82,5°	43.3	34.3	20.8	15.4	13.9	12.7	11.5	10.3	9.3	8.2	8.0	14.0	946.3
85,0°	35.1	27.9	17.2	13.2	11.8	10.7	9.6	8.7	7.7	6.9	6.7	10.9	957.2
87,5°	22.8	18.7	11.6	9.1	8.4	7.6	7.0	6.4	5.9	5.3	4.9	4.5	961.7
90,0°	15.1	12.1	8.2	6.7	6.1	5.6	5.2	4.8	4.6	4.2	4.1	3.6	965.3
92,5°	7.5	6.9	6.4	5.9	5.4	5.0	4.7	4.4	4.2	3.9	3.7	2.8	968.1
95,0°	7.1	6.6	6.1	5.6	5.3	4.9	4.6	4.3	4.1	3.8	3.7	2.6	970.7
97,5°	6.9	6.5	6.0	5.6	5.3	4.9	4.6	4.4	4.1	3.8	3.7	2.5	973.3
100,0°	6.7	6.3	5.9	5.5	5.1	4.8	4.5	4.3	4.0	3.8	3.7	2.4	975.7
102,5°	6.7	6.2	5.8	5.4	5.1	4.7	4.5	4.2	4.0	3.7	3.6	2.4	978.1
105,0°	6.6	6.1	5.7	5.4	5.0	4.7	4.5	4.2	4.0	3.7	3.7	2.3	980.4
107,5°	6.4	6.0	5.6	5.3	4.9	4.6	4.4	4.2	4.0	3.7	3.7	2.2	982.6
110,0°	6.3	5.9	5.5	5.2	4.9	4.6	4.4	4.1	4.0	3.7	3.7	2.1	984.7
112,5°	6.2	5.8	5.4	5.2	4.8	4.6	4.3	4.1	3.9	3.7	3.7	2.0	986.7

## Photometric test report

<b>Family</b> <b>MUSHROOM LUMINAIRE LED</b>	<b>Order number: 5XA5235LF14H + 5XA54000XSA</b> <b>EAN: 4058352833209 + 4058352161326</b>	<b>LP number</b> <b>59265_24</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	8.7	8.9	9.2	9.3	9.5	9.6	9.7	9.8	9.9	10.0	10.2	10.2	10.3
117,5°	8.3	8.6	8.8	9.0	9.1	9.3	9.4	9.5	9.6	9.7	9.8	10.0	10.1
120,0°	8.1	8.2	8.5	8.7	8.8	8.9	9.1	9.2	9.3	9.4	9.5	9.6	9.7
122,5°	7.5	7.8	8.0	8.2	8.4	8.5	8.6	8.7	8.8	8.9	9.0	9.2	9.2
125,0°	6.9	7.1	7.3	7.4	7.6	7.7	7.8	7.9	8.0	8.1	8.2	8.3	8.4
127,5°	5.9	6.1	6.2	6.3	6.4	6.5	6.6	6.7	6.7	6.8	6.9	7.0	7.1
130,0°	4.7	4.7	4.8	4.9	5.0	5.0	5.1	5.1	5.2	5.2	5.2	5.3	5.3
132,5°	3.4	3.5	3.6	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7
135,0°	3.0	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1
137,5°	2.5	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7
140,0°	2.1	2.2	2.2	2.3	2.3	2.3	2.2	2.2	2.2	2.2	2.2	2.2	2.2
142,5°	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.8	1.8	1.8	1.8
145,0°	1.5	1.5	1.6	1.5	1.5	1.5	1.5	1.5	1.4	1.4	1.4	1.4	1.4
147,5°	1.1	1.1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.1
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>MUSHROOM LUMINAIRE LED</b>	<b>Order number: 5XA5235LF14H + 5XA54000XSA</b> <b>EAN: 4058352833209 + 4058352161326</b>	<b>LP number</b> <b>59265_24</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	10.5	10.5	10.6	10.6	10.6	10.6	8.4	8.1	7.8	7.4	7.1	6.7	6.4
117,5°	10.1	10.2	10.2	10.3	10.3	10.3	8.1	7.8	7.4	7.1	6.8	6.5	6.1
120,0°	9.8	9.9	9.9	10.0	10.0	10.1	7.8	7.4	7.2	6.9	6.6	6.2	5.9
122,5°	9.3	9.4	9.4	9.5	9.5	9.5	7.3	7.0	6.7	6.5	6.2	5.9	5.6
125,0°	8.5	8.5	8.6	8.6	8.7	8.7	6.7	6.4	6.1	5.9	5.7	5.4	5.1
127,5°	7.1	7.2	7.2	7.2	7.3	7.3	5.7	5.4	5.3	5.1	4.8	4.7	4.4
130,0°	5.3	5.3	5.4	5.4	5.4	5.4	4.4	4.3	4.1	4.0	3.8	3.7	3.5
132,5°	3.7	3.7	3.7	3.7	3.7	3.7	3.4	3.3	3.2	3.1	3.0	2.9	2.8
135,0°	3.1	3.1	3.1	3.2	3.2	3.2	2.9	2.8	2.8	2.7	2.7	2.6	2.5
137,5°	2.7	2.7	2.7	2.7	2.7	2.7	2.5	2.5	2.4	2.4	2.3	2.2	2.2
140,0°	2.2	2.2	2.2	2.2	2.2	2.2	2.1	2.0	2.0	2.0	2.0	2.0	1.9
142,5°	1.7	1.7	1.7	1.7	1.7	1.7	1.9	1.8	1.8	1.8	1.7	1.7	1.7
145,0°	1.4	1.4	1.4	1.4	1.3	1.3	1.4	1.4	1.4	1.4	1.4	1.4	1.4
147,5°	1.1	1.1	1.1	1.1	1.1	1.0	1.1	1.1	1.1	1.1	1.1	1.1	1.2
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>MUSHROOM LUMINAIRE LED</b>	<b>Order number: 5XA5235LF14H + 5XA54000XSA</b> <b>EAN: 4058352833209 + 4058352161326</b>	<b>LP number</b> <b>59265_24</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	6.0	5.7	5.4	5.0	4.7	4.5	4.2	4.1	3.9	3.6	3.6	2.0	988.7
117,5°	5.8	5.4	5.1	4.8	4.5	4.2	4.0	3.9	3.6	3.4	3.5	1.9	990.5
120,0°	5.5	5.3	4.9	4.6	4.4	4.1	3.9	3.7	3.5	3.4	3.4	1.7	992.3
122,5°	5.3	5.0	4.7	4.4	4.1	3.9	3.7	3.5	3.3	3.2	3.3	1.6	993.9
125,0°	4.8	4.5	4.2	4.0	3.8	3.6	3.4	3.3	3.0	2.9	3.0	1.4	995.3
127,5°	4.2	3.9	3.7	3.5	3.3	3.1	2.9	2.8	2.7	2.6	2.6	1.2	996.5
130,0°	3.3	3.2	3.0	2.8	2.7	2.6	2.4	2.3	2.2	2.1	2.1	0.9	997.4
132,5°	2.7	2.6	2.5	2.4	2.3	2.2	2.1	2.0	2.0	2.0	2.0	0.6	998.0
135,0°	2.4	2.3	2.2	2.1	2.1	2.0	2.0	1.9	1.9	1.9	1.9	0.5	998.5
137,5°	2.1	2.1	2.0	2.0	1.9	1.9	1.8	1.7	1.7	1.7	1.7	0.4	999.0
140,0°	1.9	1.8	1.8	1.7	1.7	1.6	1.6	1.5	1.5	1.5	1.5	0.4	999.3
142,5°	1.6	1.6	1.5	1.5	1.5	1.4	1.4	1.4	1.4	1.4	1.4	0.3	999.6
145,0°	1.4	1.4	1.3	1.3	1.3	1.3	1.2	1.2	1.2	1.2	1.2	0.2	999.8
147,5°	1.2	1.2	1.2	1.2	1.2	1.1	1.1	1.1	1.1	1.1	1.1	0.2	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0



## Photometric test report

<b>Family</b> <b>MUSHROOM LUMINAIRE LED</b>	<b>Order number: 5XA5235LF14H + 5XA54000XSA</b> <b>EAN: 4058352833209 + 4058352161326</b>	<b>LP number</b> <b>59265_24</b>
<b>Dimming levels table</b>		<b>environmental temperature: 25°C</b>
<b>siteco</b>		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1070	10.0	10.4	10.2
95	241	252	1015	9.5	9.9	9.7
90	229	250	965	9.0	9.3	9.2
85	216	248	910	8.5	8.8	8.6
80	203	246	855	8.0	8.3	8.2
75	190	243	800	7.6	7.7	7.6
70	178	241	750	7.1	7.3	7.2
65	165	238	695	6.6	6.8	6.7
60	152	235	640	6.1	6.4	6.2
55	140	232	590	5.7	5.9	5.8
50	127	229	535	5.3	5.5	5.4
45	114	225	480	4.8	5.0	4.9
40	102	221	430	4.4	4.6	4.5
35	89	216	375	4.0	4.1	4.0
30	76	210	320	3.6	3.7	3.6
30	75	209	316	3.5	3.7	3.6