


Photometric test report

Family MUSHROOM LUMINAIRE LED	Order number: 5XA5235MF14H + 5XA54000XS EAN: 4058352833247 + 4050737730073	LP number 58301_32
	Version post-top- or mounting to wall arm, spreader element, structured Optic asymmetric, wide distribution (ST1.2a) Cover cover transparent, PMMA Lamps LED 2700 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 1470 lm Power consumption = 11.8 W Luminous efficacy = 124.6 lm/W	serial documentation 04.11.2022





Luminous intensity in cd/klm C180-0 C205-25 C210-30 C270-90 **Imax: 594 cd/klm**

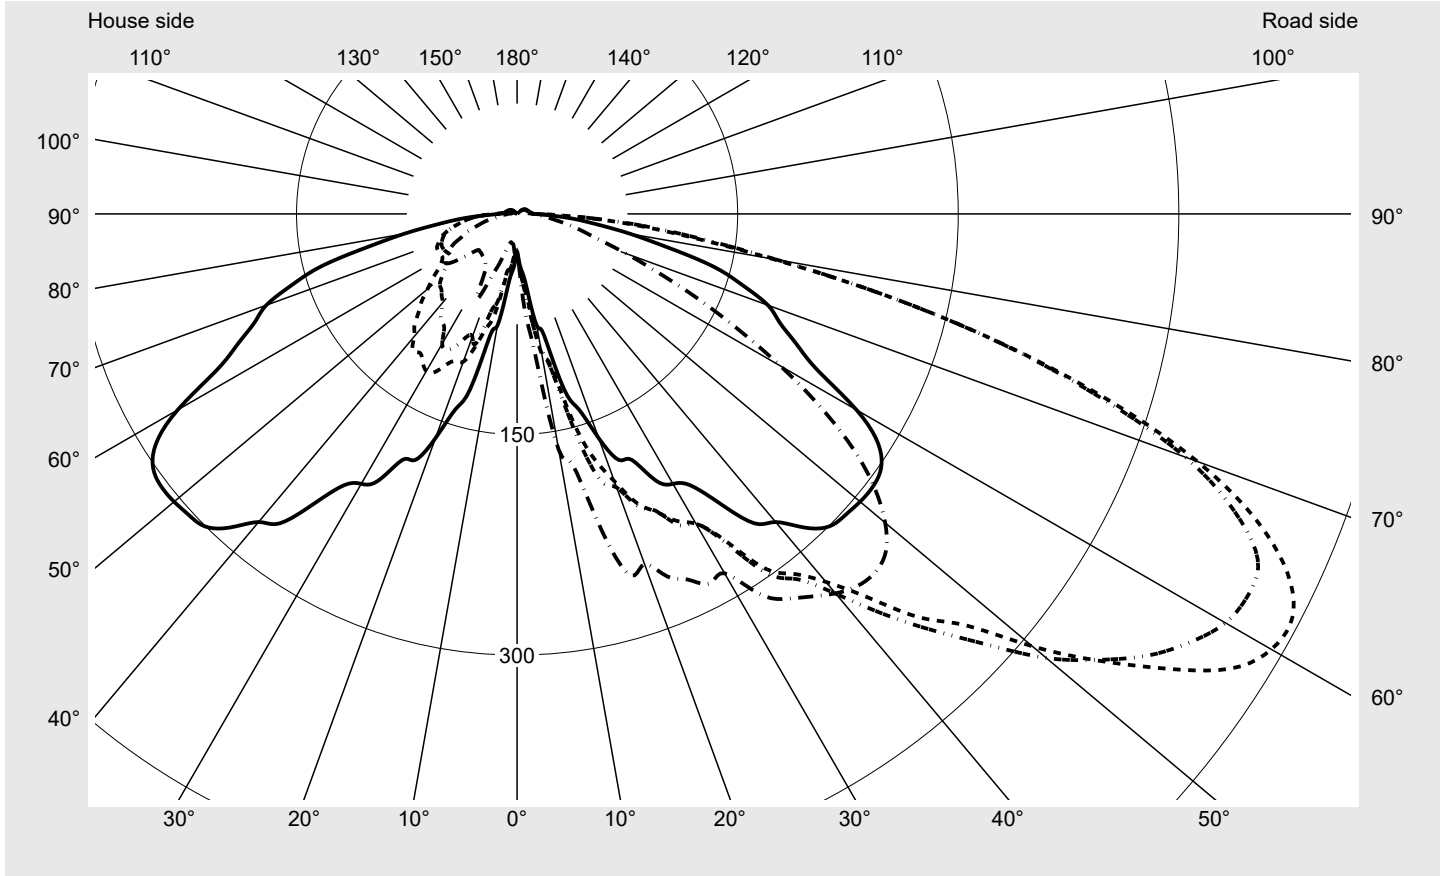


Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	97.2%
Eta 90° - 180°	2.8%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	G1
Imax 70°	492.4
Imax 80°	179.4
Imax 90°	16.3
Imax >90°	11.5
Imax >95°	9.0

Photometric test report

Family MUSHROOM LUMINAIRE LED	Order number: 5XA5235MF14H + 5XA54000XS EAN: 4058352833247 + 4050737730073	LP number 58301_32
---	---	------------------------------

Envelope curve in cd/klm **KMK 62.5°** **KMK 60°** **KMK 57.5°** **KMK 55°** **siteco**

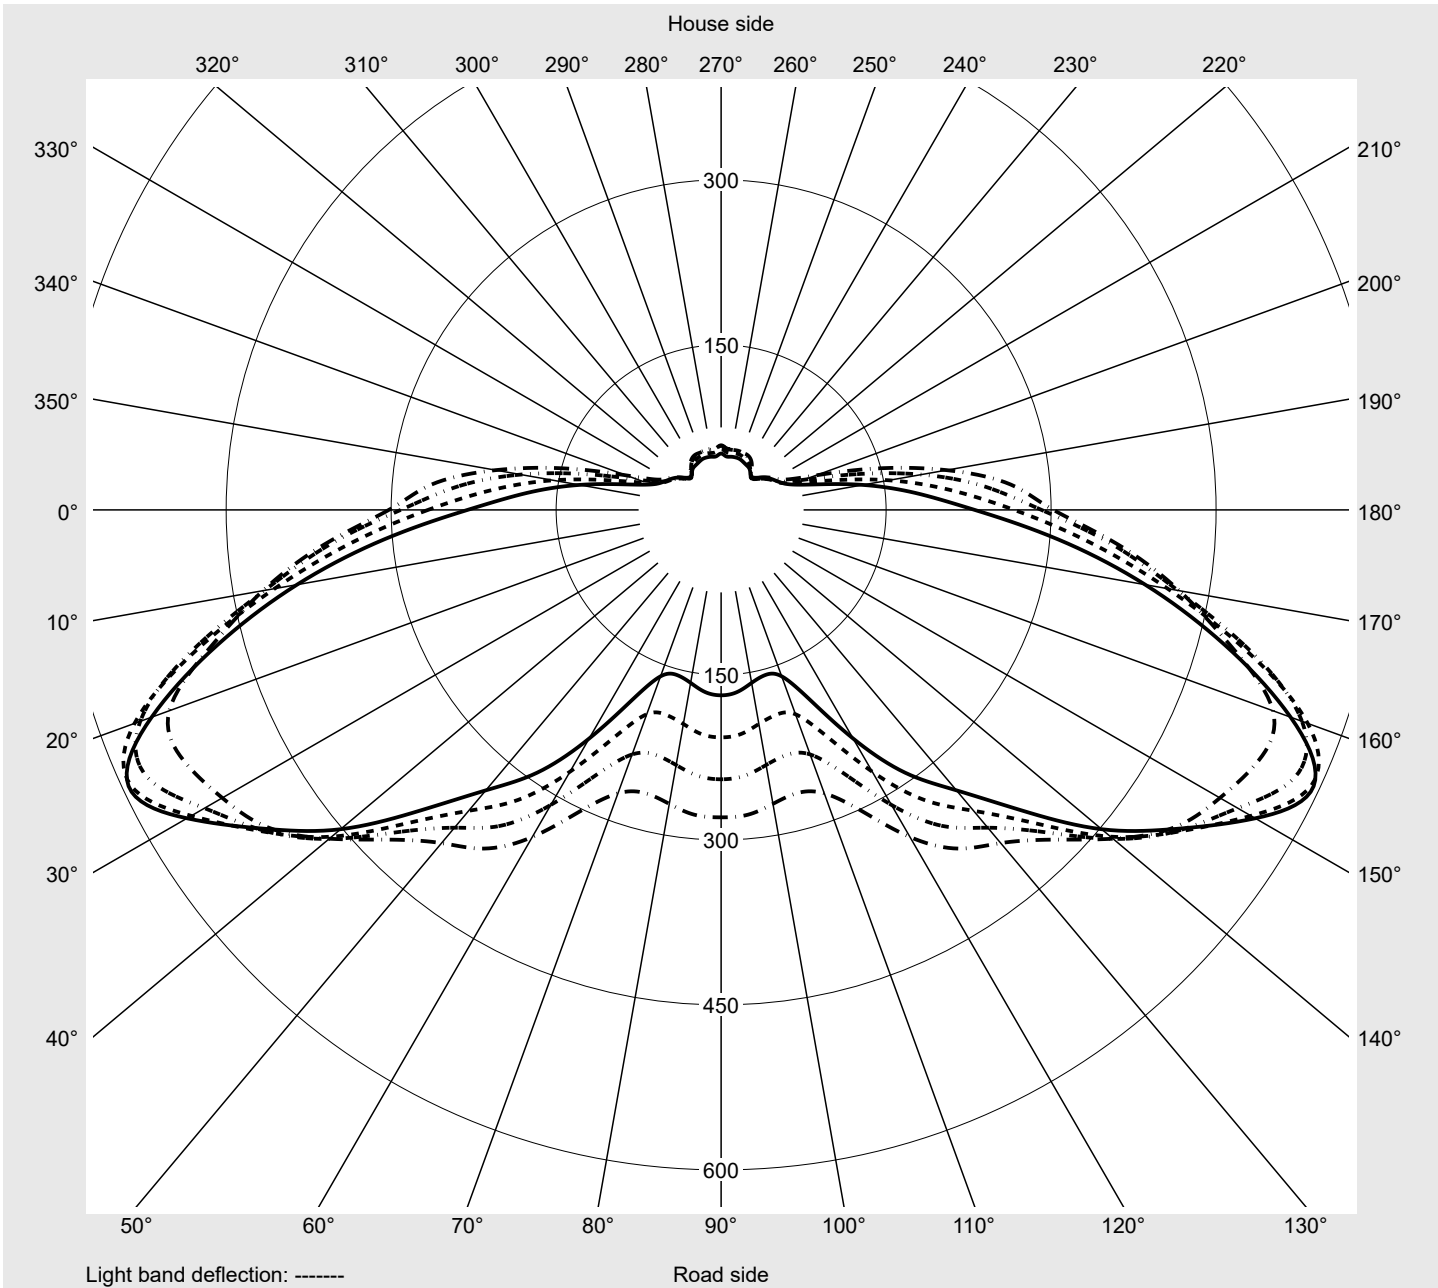

Photometric test report

Family MUSHROOM LUMINAIRE LED	Order number: 5XA5235MF14H + 5XA54000XS EAN: 4058352833247 + 4050737730073	LP number 58301_32
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6
2,5°	33.0	32.6	33.9	34.9	35.6	36.0	36.3	36.4	36.1	35.9	36.1	36.8	37.9
5,0°	39.7	42.4	43.0	44.8	47.3	47.5	48.5	48.6	49.7	52.2	54.8	56.4	59.0
7,5°	51.7	55.6	55.4	55.3	59.1	64.7	69.6	76.7	79.9	83.2	84.0	84.8	86.0
10,0°	77.2	82.3	85.2	89.4	93.7	96.6	93.5	94.3	93.7	97.4	109.3	118.1	126.3
12,5°	84.5	90.8	96.5	97.1	103.7	105.4	109.4	117.7	133.0	145.9	155.2	159.4	165.0
15,0°	123.5	123.4	129.8	138.9	130.8	144.8	155.3	169.0	177.3	177.8	181.5	186.4	192.0
17,5°	139.2	154.7	149.8	159.7	170.6	174.8	190.5	193.1	198.0	198.8	204.4	210.4	218.1
20,0°	162.3	168.9	176.5	197.5	186.5	193.5	198.0	202.7	208.5	209.2	215.1	220.8	231.0
22,5°	181.2	194.6	196.0	209.4	208.5	212.8	215.3	213.2	215.8	222.7	222.8	229.0	238.7
25,0°	184.6	190.9	193.3	208.9	210.0	223.5	222.7	226.2	229.9	230.7	234.9	238.8	246.8
27,5°	204.5	214.7	227.9	220.6	229.5	235.4	238.7	244.9	246.3	250.2	255.7	262.8	269.5
30,0°	212.0	218.2	225.9	228.2	230.5	243.3	243.4	255.5	259.0	266.4	272.4	277.8	284.3
32,5°	218.7	226.8	242.6	242.8	245.7	263.4	266.2	280.4	292.5	301.7	303.5	310.5	315.7
35,0°	240.3	249.5	265.0	267.2	276.7	294.6	299.4	302.6	313.3	319.7	329.1	331.1	330.6
37,5°	265.3	279.1	288.8	294.4	296.9	308.5	313.1	324.1	335.0	341.6	350.9	353.5	355.7
40,0°	273.5	284.3	297.8	311.9	318.0	326.7	337.2	348.6	359.2	367.1	376.3	377.2	375.0
42,5°	289.3	304.4	316.1	333.6	347.7	354.2	369.2	378.0	386.6	390.8	394.1	393.6	389.8
45,0°	300.4	320.5	340.4	365.4	379.4	388.4	400.7	411.7	415.4	411.2	411.2	406.4	396.8
47,5°	302.9	327.9	360.0	391.3	409.4	414.2	433.6	442.9	436.0	424.5	417.5	409.9	395.5
50,0°	304.5	344.2	380.7	420.9	449.8	457.4	469.8	469.0	452.7	428.2	417.4	406.6	382.1
52,5°	304.9	358.7	400.5	452.1	494.2	499.2	498.2	489.2	461.6	427.7	409.7	393.8	368.3
55,0°	302.1	362.4	423.0	480.3	533.9	539.2	523.7	503.2	465.0	424.0	395.4	375.9	343.4
57,5°	291.3	356.7	421.6	499.2	562.0	575.5	542.3	508.2	465.3	414.1	377.2	350.7	309.7
60,0°	266.5	336.1	412.3	494.5	567.6	592.3	556.3	509.5	462.1	402.6	357.1	321.9	274.8
62,5°	230.5	307.5	391.6	474.0	551.0	594.4	560.7	505.5	451.6	386.4	332.8	291.7	240.0
65,0°	209.7	280.0	362.2	439.3	519.7	578.1	555.7	495.3	435.9	368.7	308.3	260.5	209.5
67,5°	193.4	259.7	334.8	403.2	479.5	544.2	527.9	469.0	406.7	340.4	278.6	229.6	179.0
70,0°	181.5	243.8	309.6	365.3	431.9	492.4	483.7	425.3	363.8	303.4	245.9	199.6	156.5
72,5°	160.4	223.3	276.5	326.7	378.0	422.4	416.7	366.3	307.8	255.7	210.9	176.5	136.4
75,0°	138.0	188.8	230.5	271.1	313.5	342.3	341.3	298.8	247.4	207.7	177.5	151.3	110.5
77,5°	104.3	146.1	177.1	207.1	239.7	257.8	257.7	228.1	187.6	157.7	139.7	124.5	101.8
80,0°	78.2	102.5	123.9	145.1	166.2	176.6	179.4	162.6	136.0	114.5	103.6	98.9	82.0
82,5°	55.0	70.5	83.9	98.0	110.1	117.0	122.2	115.7	100.5	84.8	74.3	71.5	54.9
85,0°	38.7	46.5	54.7	63.4	70.3	74.5	79.2	79.1	70.8	60.0	51.6	49.0	38.5
87,5°	21.9	25.2	28.7	32.5	35.6	36.7	38.4	39.1	35.9	30.7	27.1	25.8	22.7
90,0°	11.7	11.7	11.8	11.9	11.9	12.0	12.1	12.1	12.1	12.0	12.1	12.1	12.1
92,5°	10.0	10.1	10.1	10.3	10.3	10.5	10.7	10.9	11.0	11.0	11.1	11.1	11.1
95,0°	8.9	9.0	9.2	9.3	9.4	9.5	9.6	9.7	9.8	9.9	10.0	10.0	10.0
97,5°	8.3	8.5	8.6	8.7	8.8	8.8	8.9	8.9	8.9	9.0	9.0	8.9	8.9
100,0°	8.0	8.1	8.2	8.3	8.4	8.4	8.4	8.4	8.5	8.5	8.5	8.5	8.5
102,5°	7.7	7.8	7.9	7.9	8.0	8.0	8.1	8.1	8.1	8.2	8.2	8.2	8.2
105,0°	7.3	7.5	7.6	7.7	7.7	7.7	7.7	7.8	7.8	7.9	7.9	7.9	7.9
107,5°	7.0	7.2	7.2	7.3	7.4	7.4	7.4	7.4	7.5	7.5	7.5	7.6	7.6
110,0°	6.7	6.9	7.0	7.0	7.0	7.1	7.1	7.2	7.2	7.3	7.3	7.3	7.3
112,5°	6.4	6.6	6.7	6.7	6.8	6.8	6.8	6.9	6.9	7.0	7.0	7.0	7.1

Photometric test report

Family MUSHROOM LUMINAIRE LED	Order number: 5XA5235MF14H + 5XA54000XS EAN: 4058352833247 + 4050737730073	LP number 58301_32
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6
2,5°	39.1	39.8	39.8	39.6	39.2	39.1	30.6	30.2	29.7	28.9	27.4	26.4	26.4
5,0°	60.9	63.0	66.5	68.2	68.9	70.5	37.3	37.0	35.4	34.4	33.6	31.3	29.9
7,5°	88.9	91.9	96.3	99.7	99.7	99.6	49.9	47.6	45.1	41.5	39.6	39.6	39.3
10,0°	134.7	140.1	148.8	154.2	158.3	162.8	78.8	69.2	57.0	47.8	43.8	40.6	41.6
12,5°	169.0	171.7	171.4	173.4	177.3	174.8	80.0	74.0	72.3	76.9	69.3	61.1	51.7
15,0°	195.1	203.0	206.1	216.4	220.9	223.6	118.9	115.8	109.4	95.7	80.3	68.7	64.7
17,5°	229.0	235.0	247.5	252.2	258.3	257.9	143.7	122.7	110.5	97.1	94.7	92.0	84.3
20,0°	233.4	239.1	248.5	255.1	255.1	253.4	153.7	134.2	123.3	113.5	107.0	88.9	80.6
22,5°	246.4	252.0	257.5	264.6	266.6	266.9	159.0	151.7	144.2	126.3	108.2	90.9	74.7
25,0°	255.9	265.1	271.8	276.3	275.3	274.3	176.6	167.4	148.6	131.6	112.8	99.7	81.5
27,5°	273.9	275.1	277.1	283.7	285.9	283.5	186.1	167.9	153.0	136.4	121.3	104.1	82.9
30,0°	292.1	296.0	295.3	292.5	285.6	282.2	198.0	179.3	165.2	143.9	123.5	101.8	77.6
32,5°	319.5	309.7	303.4	302.3	305.2	306.3	196.5	177.3	165.0	137.1	119.5	92.2	69.4
35,0°	329.7	325.0	323.7	319.1	318.1	319.5	221.2	197.7	169.9	141.6	115.4	89.5	66.0
37,5°	349.6	342.9	332.5	326.7	327.7	328.0	247.3	215.3	186.0	152.4	116.7	84.9	63.4
40,0°	362.2	349.6	339.5	336.0	337.4	336.9	255.7	223.4	184.8	148.3	108.8	78.7	63.5
42,5°	373.1	354.3	341.7	341.7	343.6	343.0	266.1	231.6	188.5	146.5	103.4	75.9	63.5
45,0°	377.6	353.2	341.3	342.1	344.7	344.5	275.6	235.9	186.5	136.3	94.8	72.8	63.3
47,5°	373.1	346.1	333.3	335.3	339.6	340.1	280.4	236.2	182.7	129.7	88.0	71.3	62.9
50,0°	357.5	329.7	318.1	322.2	327.5	326.8	280.0	229.9	174.0	116.6	79.4	66.9	60.0
52,5°	333.2	305.5	296.1	300.0	306.9	306.6	277.4	224.3	162.7	105.4	72.5	62.0	55.7
55,0°	301.9	274.2	266.6	271.4	278.2	279.5	264.3	208.2	145.3	91.8	65.4	56.9	51.5
57,5°	264.5	236.6	230.6	235.5	242.7	244.9	241.3	184.9	124.9	80.2	60.9	53.8	49.2
60,0°	227.1	197.7	192.9	197.6	204.6	206.8	208.7	155.0	103.6	71.5	58.7	53.7	49.3
62,5°	190.0	161.0	155.4	159.7	166.2	168.6	177.2	130.8	89.6	67.7	59.3	54.9	50.8
65,0°	159.4	130.7	123.6	127.2	133.1	134.2	155.0	111.6	80.5	65.7	59.3	55.6	51.2
67,5°	131.9	104.0	96.1	97.5	101.0	102.9	139.8	99.8	75.8	64.2	59.0	55.6	51.2
70,0°	109.9	82.6	74.4	74.3	76.3	78.8	126.3	90.4	71.2	61.6	56.7	54.4	50.3
72,5°	90.8	65.5	57.4	56.0	57.6	59.0	111.8	80.9	66.9	59.1	54.7	52.8	50.1
75,0°	74.8	52.5	45.0	43.6	45.0	47.1	93.0	69.8	60.1	54.3	50.8	50.2	48.9
77,5°	62.9	42.7	36.0	34.5	35.6	38.1	74.2	58.4	52.4	48.8	46.6	46.2	45.8
80,0°	51.1	34.5	28.8	27.3	27.8	29.2	56.2	46.7	43.9	42.2	41.1	41.0	41.7
82,5°	38.0	28.1	23.6	22.2	22.2	22.7	42.7	37.5	36.2	36.3	36.3	36.2	37.4
85,0°	29.8	23.4	19.9	18.5	18.1	18.1	31.4	29.1	29.2	30.4	31.3	30.8	32.4
87,5°	19.9	17.0	14.9	13.7	13.2	13.0	19.7	19.5	20.3	22.2	23.6	23.2	24.7
90,0°	12.2	12.2	12.0	11.5	11.2	11.0	11.7	12.0	12.6	13.7	14.8	14.6	15.5
92,5°	11.3	11.3	11.0	10.6	10.4	10.3	10.0	10.2	10.5	11.0	11.5	10.8	9.9
95,0°	10.1	10.1	10.1	9.8	9.6	9.6	8.6	8.3	8.0	7.7	7.3	7.0	6.7
97,5°	8.9	8.9	8.9	8.9	8.9	8.9	8.1	7.8	7.5	7.2	6.9	6.5	6.2
100,0°	8.6	8.5	8.5	8.5	8.5	8.5	7.7	7.5	7.2	6.9	6.6	6.3	6.0
102,5°	8.2	8.2	8.2	8.2	8.2	8.2	7.4	7.2	6.9	6.6	6.3	6.0	5.8
105,0°	7.9	7.9	7.9	7.9	7.9	7.9	7.2	6.9	6.7	6.4	6.1	5.8	5.6
107,5°	7.6	7.6	7.6	7.7	7.7	7.6	6.8	6.6	6.4	6.1	5.9	5.6	5.4
110,0°	7.3	7.4	7.4	7.4	7.4	7.4	6.5	6.3	6.1	5.9	5.7	5.4	5.2
112,5°	7.1	7.1	7.1	7.1	7.1	7.2	6.3	6.1	5.9	5.7	5.5	5.3	5.0

Photometric test report

Family MUSHROOM LUMINAIRE LED	Order number: 5XA5235MF14H + 5XA54000XS EAN: 4058352833247 + 4050737730073	LP number 58301_32
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6	0.0	0.0
2,5°	26.7	27.2	27.7	28.1	28.2	28.3	28.4	28.5	28.2	27.9	27.7	0.4	0.4
5,0°	29.1	26.7	27.5	28.4	28.3	28.1	27.0	26.1	24.9	24.0	23.7	1.0	1.4
7,5°	40.9	36.9	34.1	32.6	35.3	33.0	30.1	26.2	23.6	21.6	20.7	2.0	3.5
10,0°	43.8	47.4	45.2	40.1	36.2	34.5	29.8	23.7	21.0	20.1	20.2	3.7	7.2
12,5°	44.2	46.2	53.2	47.2	42.8	39.7	29.1	22.2	19.6	19.7	19.8	5.6	12.8
15,0°	60.4	53.1	52.1	41.8	35.5	34.2	35.9	29.4	25.8	23.0	22.8	8.4	21.1
17,5°	74.1	66.6	64.5	49.3	46.8	37.4	32.5	30.7	30.4	27.2	27.7	11.3	32.4
20,0°	74.9	65.5	57.7	52.4	47.4	40.7	38.4	36.5	33.3	35.1	37.4	13.6	46.0
22,5°	64.7	53.8	47.3	44.6	47.1	46.2	46.0	46.8	42.3	45.7	47.8	16.2	62.2
25,0°	67.8	51.9	45.4	43.9	44.6	45.5	47.2	50.6	53.0	58.8	63.8	18.6	80.8
27,5°	62.6	48.2	42.0	40.8	41.5	45.1	48.0	45.3	50.4	51.5	52.6	21.4	102.2
30,0°	59.6	46.5	40.9	39.3	39.6	41.0	42.3	39.5	40.2	41.1	42.6	23.8	126.0
32,5°	54.9	45.6	41.2	39.4	39.1	39.4	39.7	38.0	37.7	38.1	39.9	27.0	153.0
35,0°	52.2	44.2	41.0	39.6	39.4	38.9	38.8	37.8	35.5	36.6	37.8	30.7	183.7
37,5°	53.1	44.7	40.9	39.2	39.0	38.7	38.1	37.4	35.0	35.8	37.2	34.5	218.1
40,0°	54.4	45.9	42.2	39.3	38.7	38.0	37.2	36.7	34.2	35.2	36.8	37.8	256.0
42,5°	54.6	47.3	42.7	39.9	38.8	37.7	36.9	36.1	33.9	34.4	36.1	41.5	297.5
45,0°	55.1	46.9	41.9	40.2	39.9	38.3	37.0	36.1	33.9	34.2	35.9	45.0	342.5
47,5°	54.6	46.7	42.1	42.5	42.9	41.1	39.6	38.4	35.6	34.9	36.4	48.0	390.5
50,0°	52.4	44.6	42.0	45.5	48.2	47.6	46.1	44.8	42.2	41.0	42.9	50.7	441.2
52,5°	48.8	42.2	42.4	48.0	51.8	52.6	52.2	52.4	51.9	50.2	52.3	52.8	493.9
55,0°	45.5	40.2	42.0	48.7	53.5	55.4	55.5	56.0	56.2	56.2	58.7	53.8	547.7
57,5°	43.8	39.9	41.7	47.6	52.1	54.3	55.7	55.9	55.5	56.0	58.2	53.5	601.3
60,0°	44.2	40.2	41.3	46.1	49.4	51.4	52.8	53.0	52.5	52.9	55.2	52.0	653.3
62,5°	45.7	41.6	41.8	45.2	46.7	47.9	49.2	49.5	49.1	49.0	51.2	49.7	703.0
65,0°	46.8	42.6	42.0	44.5	44.0	43.6	44.7	44.9	45.0	44.6	46.8	47.0	750.0
67,5°	47.3	43.5	42.6	43.8	41.6	39.3	39.3	39.5	39.4	38.7	40.5	43.7	793.6
70,0°	47.5	44.8	43.9	43.8	39.7	35.1	34.7	35.2	35.4	35.0	36.8	40.0	833.6
72,5°	46.9	44.3	43.6	41.9	36.9	30.5	29.5	29.7	29.4	29.1	30.4	35.4	868.9
75,0°	45.6	43.8	42.7	39.6	33.9	26.2	24.8	25.1	24.6	24.3	25.3	30.0	898.9
77,5°	43.3	41.3	40.2	36.3	30.2	22.1	20.6	20.7	20.2	20.3	20.8	24.1	923.0
80,0°	40.4	37.9	37.1	33.0	26.7	18.4	16.8	16.6	15.9	16.0	15.3	18.2	941.2
82,5°	37.3	34.3	33.4	29.3	24.0	17.0	14.0	13.5	12.6	12.5	12.3	13.6	954.8
85,0°	33.3	29.7	28.6	24.5	20.5	14.5	11.6	11.3	10.5	10.3	10.3	9.9	964.7
87,5°	26.0	23.4	22.3	19.1	16.1	10.6	9.2	8.6	8.3	7.8	7.3	6.0	970.8
90,0°	16.3	14.9	14.2	12.4	10.3	7.5	6.9	6.6	6.3	6.1	6.2	3.2	974.0
92,5°	9.0	7.7	6.9	6.2	5.7	5.3	4.9	4.7	4.4	4.1	4.2	2.5	976.5
95,0°	6.4	6.0	5.7	5.4	5.1	4.8	4.5	4.3	4.2	3.9	3.9	2.2	978.7
97,5°	5.9	5.7	5.4	5.1	4.8	4.6	4.4	4.2	4.0	3.7	3.7	2.0	980.7
100,0°	5.7	5.5	5.2	4.9	4.7	4.4	4.3	4.1	3.9	3.6	3.6	1.9	982.6
102,5°	5.5	5.3	5.0	4.8	4.5	4.3	4.1	3.9	3.7	3.5	3.4	1.8	984.4
105,0°	5.4	5.1	4.9	4.7	4.4	4.2	4.0	3.8	3.7	3.4	3.4	1.7	986.1
107,5°	5.2	5.0	4.7	4.5	4.3	4.1	3.9	3.8	3.5	3.3	3.3	1.6	987.7
110,0°	5.0	4.8	4.6	4.4	4.2	4.0	3.9	3.7	3.4	3.2	3.2	1.6	989.3
112,5°	4.9	4.7	4.5	4.3	4.1	3.9	3.8	3.6	3.4	3.2	3.1	1.5	990.7

Photometric test report

Family MUSHROOM LUMINAIRE LED	Order number: 5XA5235MF14H + 5XA54000XS EAN: 4058352833247 + 4050737730073	LP number 58301_32
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	6.2	6.3	6.3	6.4	6.5	6.5	6.5	6.6	6.7	6.7	6.7	6.8	6.8
117,5°	5.8	5.9	6.0	6.1	6.1	6.2	6.2	6.3	6.3	6.4	6.4	6.5	6.5
120,0°	5.5	5.6	5.7	5.8	5.8	5.9	5.9	6.0	6.0	6.1	6.2	6.2	6.3
122,5°	5.1	5.2	5.3	5.4	5.4	5.5	5.5	5.6	5.7	5.7	5.8	5.9	5.9
125,0°	4.6	4.7	4.8	4.8	4.9	5.0	5.0	5.1	5.2	5.2	5.3	5.3	5.4
127,5°	4.0	4.0	4.1	4.2	4.2	4.2	4.3	4.4	4.4	4.5	4.5	4.6	4.6
130,0°	3.2	3.3	3.3	3.3	3.3	3.3	3.4	3.4	3.4	3.5	3.5	3.5	3.6
132,5°	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.6
135,0°	2.0	2.0	2.0	2.0	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9
137,5°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.6	1.6	1.6	1.6
140,0°	1.5	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.3	1.4	1.3
142,5°	1.3	1.3	1.2	1.2	1.2	1.2	1.2	1.2	1.1	1.1	1.1	1.1	1.1
145,0°	1.1	1.1	1.0	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.9	0.8	0.8
147,5°	0.9	0.9	0.8	0.8	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.7
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family MUSHROOM LUMINAIRE LED	Order number: 5XA5235MF14H + 5XA54000XS EAN: 4058352833247 + 4050737730073	LP number 58301_32
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	6.8	6.9	6.9	6.9	6.9	6.9	6.0	5.8	5.7	5.4	5.3	5.1	4.9
117,5°	6.6	6.6	6.6	6.7	6.7	6.7	5.7	5.5	5.4	5.2	5.0	4.8	4.7
120,0°	6.3	6.3	6.4	6.4	6.4	6.4	5.4	5.2	5.1	4.9	4.8	4.5	4.4
122,5°	6.0	6.0	6.0	6.1	6.1	6.1	5.0	4.9	4.7	4.6	4.4	4.3	4.1
125,0°	5.4	5.5	5.5	5.6	5.6	5.6	4.5	4.4	4.3	4.1	4.0	3.9	3.8
127,5°	4.7	4.7	4.8	4.8	4.8	4.8	3.9	3.8	3.7	3.6	3.5	3.4	3.3
130,0°	3.6	3.7	3.7	3.7	3.7	3.7	3.1	3.1	3.0	2.9	2.8	2.8	2.7
132,5°	2.6	2.6	2.6	2.6	2.6	2.6	2.4	2.4	2.4	2.3	2.3	2.3	2.2
135,0°	1.9	1.9	1.9	2.0	2.0	2.0	2.0	2.0	2.0	1.9	1.9	1.9	1.9
137,5°	1.6	1.6	1.6	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
140,0°	1.3	1.3	1.3	1.3	1.4	1.4	1.5	1.5	1.5	1.5	1.5	1.5	1.4
142,5°	1.1	1.1	1.1	1.1	1.1	1.1	1.3	1.3	1.3	1.3	1.3	1.3	1.3
145,0°	0.8	0.8	0.8	0.8	0.8	0.8	1.1	1.1	1.1	1.1	1.1	1.1	1.1
147,5°	0.7	0.7	0.7	0.7	0.7	0.7	0.9	0.9	0.9	0.9	0.9	0.9	0.9
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family MUSHROOM LUMINAIRE LED	Order number: 5XA5235MF14H + 5XA54000XS EAN: 4058352833247 + 4050737730073	LP number 58301_32
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	4.7	4.5	4.3	4.2	4.0	3.8	3.7	3.5	3.3	3.1	3.0	1.4	992.1
117,5°	4.5	4.3	4.1	4.0	3.8	3.7	3.5	3.3	3.1	2.9	2.8	1.3	993.4
120,0°	4.2	4.1	3.9	3.8	3.6	3.4	3.3	3.1	2.9	2.8	2.6	1.2	994.6
122,5°	4.0	3.8	3.7	3.5	3.4	3.2	3.1	2.9	2.7	2.6	2.6	1.1	995.7
125,0°	3.6	3.5	3.4	3.2	3.1	3.0	2.8	2.7	2.5	2.4	2.5	1.0	996.7
127,5°	3.2	3.1	2.9	2.8	2.7	2.6	2.5	2.4	2.3	2.2	2.2	0.8	997.5
130,0°	2.6	2.5	2.4	2.4	2.3	2.2	2.1	2.0	1.9	1.9	1.8	0.6	998.1
132,5°	2.2	2.1	2.0	2.0	1.9	1.9	1.8	1.7	1.7	1.6	1.6	0.5	998.6
135,0°	1.9	1.8	1.8	1.8	1.8	1.7	1.7	1.6	1.6	1.5	1.5	0.4	999.0
137,5°	1.7	1.7	1.6	1.6	1.6	1.6	1.5	1.5	1.4	1.4	1.4	0.3	999.3
140,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.3	1.3	1.2	1.2	1.2	0.2	999.5
142,5°	1.3	1.3	1.3	1.2	1.2	1.2	1.2	1.2	1.1	1.1	1.1	0.2	999.7
145,0°	1.1	1.1	1.1	1.1	1.1	1.1	1.0	1.0	1.0	1.0	1.0	0.2	999.9
147,5°	0.9	0.9	0.9	1.0	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.1	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family MUSHROOM LUMINAIRE LED	Order number: 5XA5235MF14H + 5XA54000XS EAN: 4058352833247 + 4050737730073	LP number 58301_32
--	---	-------------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1470	11.8	12.1	12.0
95	241	252	1395	11.1	11.4	11.2
90	229	250	1325	10.6	10.8	10.7
85	216	248	1250	9.9	10.2	10.0
80	203	246	1175	9.3	9.6	9.4
75	190	243	1100	8.7	9.0	8.8
70	178	241	1030	8.2	8.4	8.3
65	165	238	955	7.6	7.7	7.6
60	152	235	880	7.0	7.2	7.1
55	140	232	810	6.5	6.6	6.6
50	127	229	735	6.0	6.1	6.0
45	114	225	660	5.4	5.6	5.5
40	102	221	590	5.0	5.1	5.0
35	89	216	515	4.5	4.6	4.6
30	76	210	440	4.0	4.0	4.0
26	65	204	376	3.6	3.7	3.6