


# Photometric test report

<b>Family</b> <b>CITY-LIGHT PLUS LED</b>	<b>Order number:</b> 5XA5275EF14H + 5XA54000XS <b>EAN:</b> 4058352636138 + 4050737730073	<b>LP number</b> <b>59107_25</b>
	<b>Version</b> post-top- or mounting to wall arm, spreader element, structured <b>Optic</b> asymmetric, wide distribution (ST1.2a) <b>Cover</b> cover transparent, PMMA <b>Lamps</b> LED 3000 K   CRI ≥ 70 <b>Controlgear</b> ECG SITECO iQ <b>Rated values</b> Net luminous flux = 1390 lm Power consumption = 10.5 W Luminous efficacy = 132.4 lm/W	<b>serial documentation</b> <b>07.07.2022</b>





**Luminous intensity in cd/klm** C180-0 C205-25 C210-30 C270-90 **Imax: 610 cd/klm**

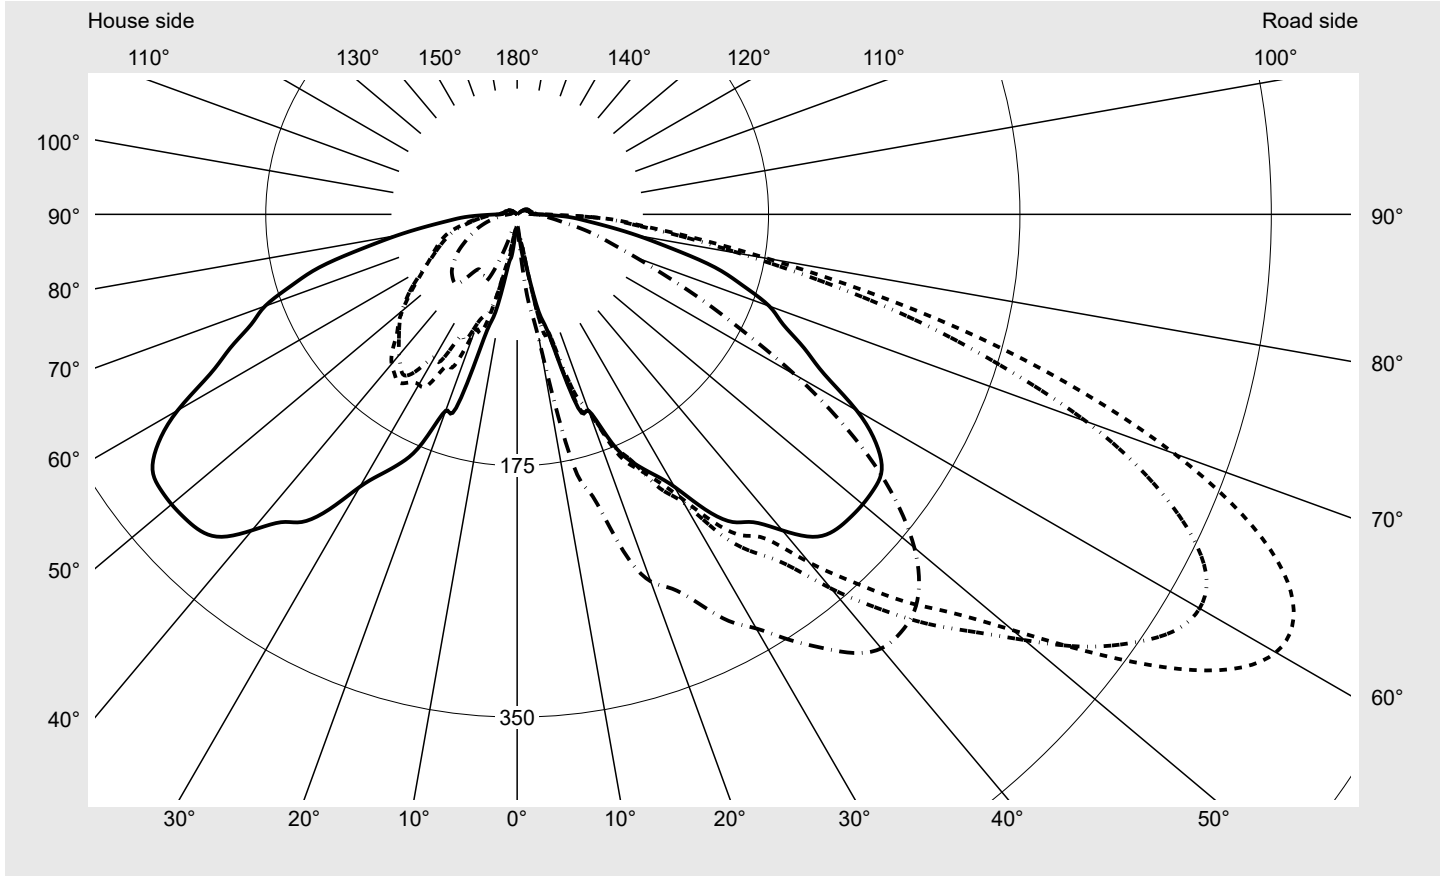


Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	97.2%
Eta 90° - 180°	2.8%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	G1
Imax 70°	486.7
Imax 80°	176.6
Imax 90°	16.1
Imax >90°	12.6
Imax >95°	10.8

**Photometric test report**

<b>Family</b> CITY-LIGHT PLUS LED	<b>Order number:</b> 5XA5275EF14H + 5XA54000XS <b>EAN:</b> 4058352636138 + 4050737730073	<b>LP number</b> 59107_25
--------------------------------------	---	------------------------------

**Envelope curve in cd/klm**      **KMK 60°**    **KMK 57.5°**    **KMK 55°**    **KMK 52.5°**      **siteco**

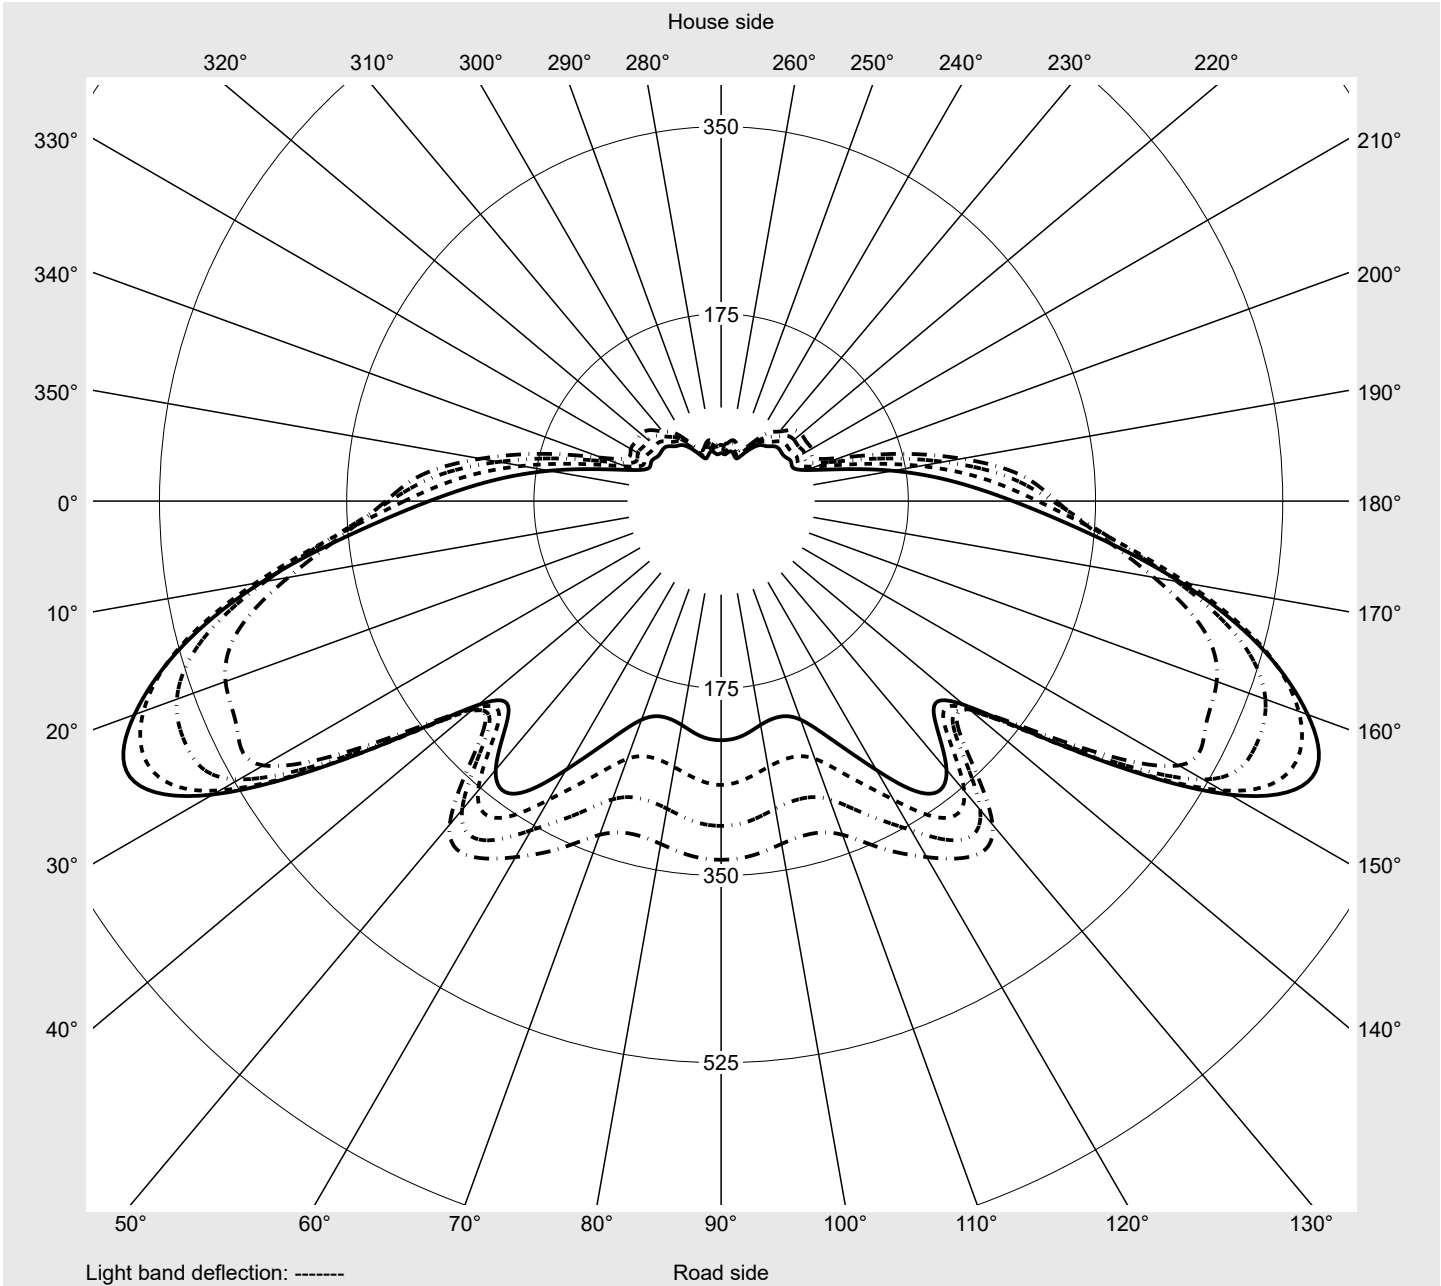

## Photometric test report

<b>Family</b> <b>CITY-LIGHT PLUS LED</b>	<b>Order number: 5XA5275EF14H + 5XA54000XS</b> <b>EAN: 4058352636138 + 4050737730073</b>	<b>LP number</b> <b>59107_25</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7
2,5°	10.8	10.8	10.8	10.8	10.8	10.8	10.8	11.1	11.1	11.4	11.4	11.7	11.7
5,0°	12.3	13.4	14.3	15.5	16.7	17.6	18.2	18.8	19.7	20.9	23.0	24.8	26.0
7,5°	29.3	30.5	30.8	28.7	24.8	20.0	17.9	19.4	24.5	30.8	38.5	45.1	49.3
10,0°	37.1	34.1	36.8	39.7	38.8	34.4	33.5	41.8	58.9	74.1	85.2	89.3	88.4
12,5°	69.6	85.5	94.1	97.7	92.0	83.7	84.3	76.8	79.5	87.5	100.7	112.6	121.0
15,0°	89.6	82.5	90.8	100.7	100.1	89.0	85.5	89.6	101.0	121.3	137.2	147.3	167.6
17,5°	141.3	148.2	135.7	136.3	142.5	138.9	126.7	114.1	112.1	141.0	154.8	159.9	178.7
20,0°	145.5	161.4	156.6	154.5	156.3	147.3	145.5	134.5	133.3	159.3	177.5	183.5	206.8
22,5°	172.1	187.6	183.2	183.5	181.7	177.5	173.3	151.8	139.8	170.9	196.6	206.8	230.1
25,0°	190.6	205.3	201.7	205.9	201.1	194.5	189.7	167.6	153.9	180.5	214.2	222.3	242.9
27,5°	203.5	216.9	214.5	215.1	210.7	208.3	214.8	184.7	166.4	202.9	244.1	246.8	274.3
30,0°	219.0	233.4	234.6	236.4	229.8	227.7	231.9	199.0	183.2	223.8	263.5	272.2	298.8
32,5°	243.5	256.7	259.1	260.9	254.0	253.7	264.4	223.2	199.9	252.5	308.4	311.9	332.0
35,0°	261.5	273.7	277.9	280.6	273.7	272.8	287.1	241.4	220.8	271.6	335.0	339.1	356.5
37,5°	270.1	280.3	281.8	286.8	281.2	284.8	306.9	256.1	234.3	291.9	359.5	367.8	383.4
40,0°	287.1	299.1	306.9	317.0	311.4	316.4	340.0	280.9	250.4	311.1	388.7	397.4	407.0
42,5°	304.5	317.0	332.0	348.4	340.3	347.8	372.0	306.9	266.2	324.8	404.9	412.0	417.1
45,0°	311.6	328.7	352.6	375.0	371.4	381.0	402.8	330.2	281.5	331.7	410.9	419.2	420.1
47,5°	313.4	335.6	367.2	400.1	401.9	410.6	430.0	352.6	290.4	331.7	411.4	421.3	418.6
50,0°	314.0	343.6	388.4	429.7	440.7	450.3	461.1	374.7	300.3	328.7	405.2	416.8	406.1
52,5°	313.4	353.8	410.9	467.3	493.0	499.6	494.2	392.9	303.0	320.9	394.7	405.8	384.3
55,0°	309.9	360.7	432.7	502.3	541.4	549.5	520.5	403.4	305.7	310.5	376.8	386.9	355.3
57,5°	296.1	359.5	442.2	522.9	574.6	589.2	540.8	409.7	302.1	295.2	353.5	361.5	322.4
60,0°	272.8	345.1	436.0	520.5	583.6	609.9	548.6	410.0	296.4	281.2	327.8	333.8	290.1
62,5°	241.1	320.3	414.4	496.9	567.1	609.3	540.5	398.6	283.9	262.6	300.6	302.7	255.2
65,0°	220.5	296.4	386.9	463.1	536.3	588.3	513.9	378.6	271.3	244.4	273.1	272.2	224.4
67,5°	200.5	277.3	359.2	423.4	490.6	546.5	473.6	347.5	248.3	221.7	246.2	241.1	192.7
70,0°	186.8	259.4	330.2	382.5	438.9	486.7	421.6	311.4	224.7	199.0	216.3	217.5	174.5
72,5°	164.6	233.4	292.5	335.6	378.0	413.8	356.5	265.6	193.6	170.9	187.3	193.3	145.8
75,0°	142.5	197.2	244.7	278.8	310.2	334.7	290.7	217.2	158.1	138.9	147.6	158.7	128.2
77,5°	110.9	153.0	188.5	213.9	235.2	250.7	220.2	163.1	116.8	99.5	115.0	133.3	120.7
80,0°	85.2	112.1	136.6	155.1	167.6	176.6	158.7	120.4	90.5	77.4	83.7	99.2	84.3
82,5°	62.7	80.7	97.4	110.3	117.7	123.1	113.8	90.5	69.9	58.9	59.8	69.3	56.2
85,0°	46.3	57.1	68.1	77.4	81.9	84.9	81.0	66.9	51.1	43.9	43.3	47.8	42.4
87,5°	33.2	40.6	48.4	54.7	57.7	58.9	56.8	47.8	36.2	31.4	32.6	36.5	34.1
90,0°	13.4	13.4	14.9	15.8	16.1	15.8	15.2	13.7	12.6	11.7	12.8	14.0	14.9
92,5°	11.1	11.4	12.3	12.6	12.3	12.3	12.0	11.4	9.9	9.3	9.9	11.1	12.0
95,0°	10.5	10.5	11.4	11.7	11.4	11.1	11.1	10.2	9.3	8.7	9.0	10.2	11.1
97,5°	9.6	9.9	10.5	10.8	10.5	10.2	10.2	9.6	8.7	8.1	8.4	9.6	10.2
100,0°	9.0	9.6	9.9	9.9	9.9	9.6	9.3	9.0	8.1	7.8	8.1	9.0	9.6
102,5°	8.4	9.0	9.3	9.3	9.3	9.0	8.7	8.1	7.8	7.5	7.5	8.4	9.0
105,0°	8.4	8.4	8.4	8.7	8.4	8.4	8.1	7.8	7.5	7.2	7.5	7.8	8.7
107,5°	7.8	7.8	8.1	8.4	7.8	7.8	7.5	7.5	6.9	7.2	7.2	7.5	8.1
110,0°	7.2	7.5	7.8	7.8	7.5	7.2	7.2	6.9	6.6	6.6	6.9	7.2	7.8
112,5°	6.9	7.2	7.2	7.2	6.9	6.9	6.6	6.6	6.6	6.6	6.6	6.9	7.5

## Photometric test report

<b>Family</b> <b>CITY-LIGHT PLUS LED</b>	<b>Order number: 5XA5275EF14H + 5XA54000XS</b> <b>EAN: 4058352636138 + 4050737730073</b>	<b>LP number</b> <b>59107_25</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7
2,5°	11.7	11.7	11.7	11.7	12.0	12.0	10.8	10.8	10.5	10.8	10.5	10.5	10.2
5,0°	26.9	27.5	28.1	28.4	28.4	28.1	12.0	11.7	11.4	11.1	10.8	10.8	10.5
7,5°	53.5	58.9	63.0	64.5	63.9	62.7	26.6	22.4	18.5	15.5	13.4	12.0	11.4
10,0°	89.3	89.6	92.6	92.6	91.4	92.0	40.3	42.1	38.5	35.6	29.9	22.7	17.3
12,5°	134.5	147.0	155.1	162.0	171.2	176.3	60.7	46.0	36.8	33.8	40.0	42.7	41.2
15,0°	186.5	190.6	198.1	199.9	200.5	203.2	89.6	81.9	77.7	72.9	71.1	66.6	49.6
17,5°	205.3	221.4	237.2	246.8	248.6	245.6	119.8	109.1	103.1	99.8	86.7	74.1	57.4
20,0°	230.7	245.9	252.8	260.6	268.6	271.9	151.5	142.2	116.8	100.1	87.3	80.7	68.1
22,5°	254.0	257.6	270.7	283.3	283.9	282.1	161.1	140.7	129.4	127.9	113.8	95.0	74.4
25,0°	268.9	283.6	291.0	296.7	297.3	298.8	180.2	164.0	150.6	137.2	116.2	93.5	74.4
27,5°	306.0	313.4	313.1	315.2	316.1	319.1	190.9	174.8	160.8	149.7	133.9	115.0	92.3
30,0°	323.6	329.6	332.6	337.0	334.1	332.9	207.1	184.7	164.0	150.0	136.9	114.4	91.7
32,5°	351.4	355.0	355.6	353.5	350.8	350.8	228.0	204.4	177.5	158.4	138.6	127.9	109.4
35,0°	375.3	378.3	373.5	369.9	368.4	368.1	246.2	218.1	188.8	166.4	143.1	136.9	127.3
37,5°	397.7	391.7	381.9	379.5	381.9	384.9	253.4	222.9	190.3	165.2	140.1	133.3	129.4
40,0°	412.3	399.5	387.5	385.8	390.5	394.4	271.6	236.7	198.4	165.8	136.0	127.9	126.7
42,5°	417.7	401.9	388.7	388.7	393.5	395.0	286.3	245.6	202.0	161.7	128.5	121.9	123.7
45,0°	418.3	398.0	384.3	384.6	389.3	390.8	291.6	245.9	198.7	151.8	118.6	116.2	119.8
47,5°	409.4	384.9	372.0	372.9	378.0	379.5	292.2	244.4	194.2	142.2	112.1	110.9	113.2
50,0°	387.8	361.8	350.8	353.5	359.2	361.0	288.6	238.1	182.9	129.7	104.3	104.6	105.5
52,5°	358.6	332.0	322.1	325.4	332.6	335.3	280.9	228.3	170.6	118.3	95.9	97.4	97.1
55,0°	323.6	296.7	288.0	291.9	300.3	303.6	267.4	211.3	153.6	105.8	87.8	89.9	88.7
57,5°	284.5	256.4	248.3	252.5	260.9	265.3	245.0	189.1	133.9	94.7	80.4	81.9	80.4
60,0°	246.5	217.5	208.9	212.4	220.5	223.5	216.0	163.1	115.0	84.9	74.1	75.0	72.6
62,5°	208.9	179.3	169.7	172.7	179.6	179.9	185.9	137.4	99.8	77.4	68.7	68.1	64.8
65,0°	178.1	147.6	137.4	139.2	144.3	144.0	162.0	118.6	88.7	72.3	64.8	63.0	58.6
67,5°	148.8	119.5	108.8	109.1	110.6	112.3	143.4	104.3	81.6	67.8	61.0	58.6	53.2
70,0°	126.4	97.7	87.0	85.5	86.4	88.4	129.1	94.1	75.3	64.2	57.7	54.4	48.1
72,5°	104.9	79.5	68.7	66.0	67.2	70.5	113.5	84.0	69.0	59.2	53.8	50.2	43.0
75,0°	87.3	65.1	55.6	52.3	54.1	58.0	97.1	73.2	61.9	53.8	49.3	46.0	38.8
77,5°	71.7	50.8	43.0	40.6	42.1	45.4	78.3	61.3	52.9	46.6	43.0	40.0	33.8
80,0°	53.5	39.7	33.8	32.0	32.3	33.5	61.3	49.9	44.2	39.4	36.5	34.1	29.0
82,5°	41.8	32.3	27.8	26.0	25.7	26.3	48.4	40.6	36.5	32.9	30.8	29.0	24.8
85,0°	33.8	26.9	23.6	21.8	21.2	20.9	37.4	32.6	29.9	27.2	25.7	23.9	20.9
87,5°	28.7	23.6	21.2	19.4	18.2	17.9	28.4	25.4	23.9	21.8	20.3	19.1	17.3
90,0°	14.6	14.0	13.7	13.4	13.1	13.1	13.4	12.8	12.8	12.3	12.0	11.4	10.8
92,5°	12.0	12.6	12.6	12.3	12.3	12.0	11.4	11.1	10.8	10.2	9.9	9.6	9.0
95,0°	11.4	11.4	11.7	11.7	11.4	11.4	10.2	10.2	9.9	9.3	9.0	8.7	7.8
97,5°	10.5	10.8	10.8	10.8	10.8	10.8	9.6	9.6	9.3	8.7	8.4	7.8	7.5
100,0°	9.9	10.2	10.2	10.2	10.2	10.2	9.0	9.0	8.4	8.1	7.8	7.2	6.9
102,5°	9.6	9.6	9.6	9.6	9.6	9.6	8.4	8.4	7.8	7.5	7.2	6.9	6.3
105,0°	9.0	9.0	9.6	9.6	9.3	9.0	7.8	7.8	7.5	7.2	6.6	6.3	6.0
107,5°	8.4	8.7	9.0	9.0	9.0	9.0	7.2	7.2	6.9	6.6	6.3	6.0	5.7
110,0°	8.1	8.4	8.4	8.4	8.4	8.4	7.2	6.9	6.6	6.3	6.0	5.7	5.4
112,5°	7.8	7.8	8.1	8.4	8.4	8.4	6.6	6.6	6.3	6.0	5.7	5.4	5.1

## Photometric test report

<b>Family</b> <b>CITY-LIGHT PLUS LED</b>	<b>Order number: 5XA5275EF14H + 5XA54000XS</b> <b>EAN: 4058352636138 + 4050737730073</b>	<b>LP number</b> <b>59107_25</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	0.0	0.0
2,5°	10.5	10.8	10.5	10.5	10.5	10.8	10.8	10.8	10.5	10.5	10.8	0.1	0.1
5,0°	10.5	10.8	10.8	10.5	10.2	10.2	10.2	10.2	10.5	10.2	10.2	0.4	0.5
7,5°	11.1	10.8	10.8	10.8	10.8	10.8	10.8	10.2	10.2	9.9	10.2	0.9	1.5
10,0°	13.7	12.3	11.7	11.4	11.4	11.4	10.8	10.8	10.2	9.9	9.6	2.0	3.5
12,5°	33.2	24.8	17.0	13.1	12.0	12.0	11.4	10.5	9.9	9.6	9.6	4.1	7.6
15,0°	42.1	47.8	40.6	34.4	21.2	14.6	12.6	11.4	10.5	9.9	9.6	6.4	14.0
17,5°	45.7	37.6	32.9	29.3	35.0	30.8	23.0	20.6	15.5	14.3	13.7	9.3	23.3
20,0°	58.0	54.1	45.7	35.9	35.0	26.9	20.0	25.7	29.9	29.9	27.5	11.9	35.2
22,5°	59.5	50.8	41.5	38.2	37.9	34.4	27.2	35.0	36.8	42.4	42.4	14.9	50.1
25,0°	59.5	49.6	41.5	39.7	39.1	36.2	33.8	38.8	44.2	48.1	51.4	17.8	67.9
27,5°	69.3	54.7	43.3	42.1	42.1	42.7	46.3	52.6	46.9	50.2	49.0	21.3	89.2
30,0°	72.3	61.9	53.8	48.1	43.9	40.3	40.6	49.6	46.3	50.2	49.0	24.6	113.8
32,5°	90.2	73.8	56.5	49.9	49.6	47.8	47.2	50.2	45.1	47.2	47.8	29.0	142.8
35,0°	117.7	100.1	82.8	70.5	61.6	51.7	46.3	50.5	46.3	46.3	46.6	33.5	176.3
37,5°	124.9	111.2	95.0	84.6	70.2	55.9	48.1	55.3	53.8	52.0	52.0	37.2	213.5
40,0°	123.1	108.2	94.7	85.5	71.1	58.6	54.7	62.7	63.3	61.6	62.2	41.4	254.9
42,5°	121.6	107.6	95.0	86.7	72.6	60.1	55.0	63.3	64.8	63.9	64.5	45.1	300.0
45,0°	118.9	106.7	93.8	86.1	72.3	60.4	55.3	61.6	63.6	62.2	63.3	48.1	348.2
47,5°	113.5	103.7	92.0	84.9	71.7	59.2	54.1	60.1	62.2	59.5	61.6	50.5	398.7
50,0°	106.4	98.6	88.4	81.6	69.3	57.4	52.9	58.0	61.0	57.7	59.2	52.3	451.0
52,5°	97.7	93.8	84.9	78.3	66.3	55.0	50.5	55.6	57.7	53.8	55.6	53.7	504.6
55,0°	89.0	86.4	78.6	72.6	62.7	52.3	48.1	52.9	54.4	51.1	52.6	54.2	558.8
57,5°	80.4	78.9	72.3	68.1	59.8	49.9	45.1	48.4	50.8	47.2	49.0	53.5	612.4
60,0°	72.6	72.0	66.9	63.9	57.1	48.4	42.4	45.1	47.2	43.9	44.8	51.8	664.2
62,5°	64.8	65.1	61.9	61.0	55.3	47.2	39.4	41.2	43.3	40.3	40.6	48.9	713.0
65,0°	58.6	59.5	57.4	57.7	53.2	45.4	37.4	37.6	39.4	36.5	37.1	45.7	758.7
67,5°	52.9	54.1	52.6	54.1	50.5	43.3	35.3	34.1	35.0	32.9	32.9	41.9	800.6
70,0°	47.8	49.3	49.3	50.8	48.1	41.8	33.2	31.7	31.1	29.3	29.9	38.1	838.7
72,5°	42.4	43.6	43.9	45.7	43.6	38.2	32.0	29.3	28.1	26.0	26.3	33.5	872.2
75,0°	37.1	37.9	38.2	39.7	37.6	32.9	28.4	26.3	24.5	22.7	22.7	28.3	900.5
77,5°	31.4	31.7	31.4	32.9	31.1	27.2	23.6	22.1	21.2	19.1	19.1	22.5	923.0
80,0°	26.0	25.4	24.5	26.3	25.4	22.4	20.0	18.5	17.6	15.8	15.5	17.1	940.1
82,5°	22.1	20.3	19.7	21.2	20.3	18.8	17.0	15.8	14.6	13.4	12.6	12.9	953.0
85,0°	18.2	16.1	15.5	17.0	16.4	14.9	13.7	13.4	12.3	11.1	10.2	9.7	962.7
87,5°	14.6	12.0	11.4	12.8	12.8	12.3	11.4	11.1	10.5	9.0	7.8	7.4	970.1
90,0°	9.3	7.2	7.5	8.7	9.3	9.3	9.0	8.4	8.1	6.6	6.0	3.3	973.4
92,5°	7.5	5.7	5.7	6.6	7.2	7.2	7.2	6.9	6.3	5.4	4.8	2.7	976.1
95,0°	7.2	5.7	5.1	6.0	6.6	6.3	6.0	6.0	5.7	5.1	4.2	2.5	978.5
97,5°	6.6	5.4	4.8	5.4	5.7	5.7	5.4	5.4	5.1	4.5	4.2	2.3	980.8
100,0°	6.0	5.1	4.5	4.8	5.4	5.1	5.1	4.8	4.8	4.5	4.2	2.1	982.9
102,5°	5.7	4.8	4.2	4.5	4.8	4.8	4.8	4.8	4.5	4.2	4.2	2.0	984.9
105,0°	5.7	4.8	4.2	4.2	4.8	4.2	4.2	4.2	4.2	4.2	3.6	1.8	986.7
107,5°	5.1	4.5	4.2	4.2	4.2	4.2	4.2	4.2	4.2	3.9	3.6	1.7	988.5
110,0°	5.1	4.5	3.9	4.2	4.2	3.9	4.2	4.2	3.9	3.6	3.6	1.6	990.1
112,5°	4.8	4.5	3.9	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	1.5	991.6

## Photometric test report

<b>Family</b> <b>CITY-LIGHT PLUS LED</b>	<b>Order number: 5XA5275EF14H + 5XA54000XS</b> <b>EAN: 4058352636138 + 4050737730073</b>	<b>LP number</b> <b>59107_25</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	6.6	6.6	6.9	6.9	6.9	6.6	6.6	6.3	6.3	6.6	6.6	6.6	6.9
117,5°	6.0	6.3	6.6	6.6	6.3	6.0	6.0	6.0	6.0	6.0	6.0	6.6	6.6
120,0°	6.0	6.0	6.0	6.0	5.7	5.7	5.4	5.4	5.7	6.0	6.0	6.0	6.3
122,5°	5.1	5.4	5.4	5.4	5.1	4.8	4.8	4.8	5.4	5.4	5.4	5.4	5.7
125,0°	4.2	4.2	4.2	4.2	4.2	4.2	3.9	3.9	4.2	4.2	4.2	4.2	4.2
127,5°	3.0	3.0	3.0	3.0	3.0	3.0	2.4	2.4	2.7	2.7	2.7	2.7	2.7
130,0°	1.8	1.8	1.8	2.1	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8
132,5°	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.5	1.5	1.5	1.2	1.8
135,0°	1.8	1.8	1.8	1.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
137,5°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.9	0.9	1.2	0.6
140,0°	1.5	1.2	1.2	1.2	0.9	0.9	0.9	0.6	0.9	0.6	0.6	0.6	0.6
142,5°	1.8	1.5	1.2	1.2	1.2	0.9	0.6	0.6	0.6	0.6	0.6	0.6	0.6
145,0°	1.2	1.2	1.5	1.2	1.2	1.2	1.2	0.6	0.6	0.6	0.6	0.6	0.6
147,5°	1.2	1.2	1.2	1.2	1.2	1.2	0.9	0.9	0.6	0.6	0.6	0.6	0.6
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>CITY-LIGHT PLUS LED</b>	<b>Order number: 5XA5275EF14H + 5XA54000XS</b> <b>EAN: 4058352636138 + 4050737730073</b>	<b>LP number</b> <b>59107_25</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
115,0°	7.5	7.8	7.8	7.8	7.8	7.8	6.6	6.0	6.0	5.7	5.4	5.4	4.8
117,5°	7.2	7.5	7.8	7.8	7.8	7.8	6.0	6.0	5.4	5.4	5.1	4.8	4.8
120,0°	6.6	6.9	7.2	7.2	7.2	7.2	5.4	5.4	5.4	4.8	4.8	4.8	4.5
122,5°	5.7	6.3	6.6	6.6	6.6	6.6	5.1	4.8	4.8	4.5	4.2	4.2	4.2
125,0°	4.5	4.8	4.8	4.8	4.8	4.8	3.9	3.9	3.6	3.6	3.6	3.6	3.3
127,5°	3.0	3.0	3.0	3.0	3.0	3.0	2.7	2.7	2.7	2.7	2.7	2.7	2.4
130,0°	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	2.1	2.1	2.4
132,5°	1.2	1.2	1.5	1.5	1.5	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8
135,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.8	1.8	1.8	1.8	1.8	1.8	1.8
137,5°	0.6	0.6	0.6	0.6	0.6	0.6	1.2	1.5	1.8	1.8	1.5	1.8	1.8
140,0°	0.6	0.6	0.6	0.6	0.6	0.6	1.8	1.5	1.2	1.2	1.2	1.2	1.2
142,5°	0.6	0.6	0.6	0.6	0.6	0.6	1.2	1.2	1.2	1.2	1.2	1.2	1.2
145,0°	0.6	0.6	0.6	0.6	0.6	0.6	1.2	1.2	1.2	1.2	1.2	1.2	1.2
147,5°	0.6	0.6	0.6	0.6	0.6	0.6	1.2	1.2	0.9	1.2	1.2	1.2	0.9
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>CITY-LIGHT PLUS LED</b>	<b>Order number: 5XA5275EF14H + 5XA54000XS</b> <b>EAN: 4058352636138 + 4050737730073</b>	<b>LP number</b> <b>59107_25</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	4.8	4.5	3.9	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	1.4	993.0
117,5°	4.5	4.2	3.9	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	1.3	994.4
120,0°	4.2	3.9	3.6	3.3	3.0	3.0	3.0	3.3	3.6	3.6	3.6	1.2	995.6
122,5°	3.9	3.9	3.6	3.3	3.0	3.0	3.0	3.0	3.0	3.3	3.6	1.1	996.7
125,0°	3.0	3.0	3.0	3.0	2.7	2.4	2.4	2.7	3.0	3.0	3.0	0.8	997.5
127,5°	2.4	2.4	2.4	2.4	2.4	2.4	2.1	2.1	2.4	2.4	2.4	0.6	998.1
130,0°	2.1	2.1	1.8	1.8	1.8	1.8	1.8	1.8	1.8	2.1	1.8	0.4	998.5
132,5°	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	0.3	998.8
135,0°	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	0.3	999.1
137,5°	1.8	1.5	1.8	1.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.2	999.4
140,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.2	999.5
142,5°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.9	0.9	0.6	0.2	999.7
145,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.6	0.6	0.6	0.2	999.9
147,5°	1.2	1.2	1.2	1.2	1.2	0.9	0.9	1.2	1.2	0.6	1.2	0.1	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0



## Photometric test report

<b>Family</b> <b>CITY-LIGHT PLUS LED</b>	<b>Order number: 5XA5275EF14H + 5XA54000XS</b> <b>EAN: 4058352636138 + 4050737730073</b>	<b>LP number</b> <b>59107_25</b>
<b>Dimming levels table</b>		<b>environmental temperature: 25°C</b>
<b>siteco</b>		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1390	10.5	10.8	10.6
95	241	252	1319	10.0	10.3	10.2
90	229	250	1253	9.4	9.8	9.6
85	216	248	1182	8.9	9.2	9.0
80	203	246	1111	8.3	8.7	8.5
75	190	243	1040	7.8	8.1	8.0
70	178	241	974	7.3	7.6	7.4
65	165	238	903	6.9	7.1	7.0
60	152	235	832	6.4	6.6	6.5
55	140	232	766	5.9	6.1	6.0
50	127	229	695	5.4	5.6	5.5
45	114	225	624	5.0	5.2	5.1
40	102	221	558	4.6	4.7	4.6
35	89	216	487	4.1	4.3	4.2
30	76	210	416	3.7	3.8	3.8
28	72	208	394	3.5	3.7	3.6