


# Photometric test report

<b>Family</b> <b>CITY-LIGHT 400 LED</b>	<b>Order number: 5XA5305EF14H + 5XA54000XS</b> <b>EAN: 4058352636350 + 4050737730073</b>	<b>LP number</b> <b>59087_96</b>
	<b>Version</b> post-top- or mounting to wall arm, spreader element, structured <b>Optic</b> asymmetric, wide distribution (ST1.2a) <b>Cover</b> cover transparent, PMMA <b>Lamps</b> LED 3000 K   CRI ≥ 70 <b>Controlgear</b> ECG SITECO iQ <b>Rated values</b> Net luminous flux = 1450 lm Power consumption = 10.5 W Luminous efficacy = 138.1 lm/W	<b>serial documentation</b> <b>08.07.2022</b>
		

**Luminous intensity in cd/klm** C180-0 C205-25 C210-30 C270-90 **Imax: 584 cd/klm**

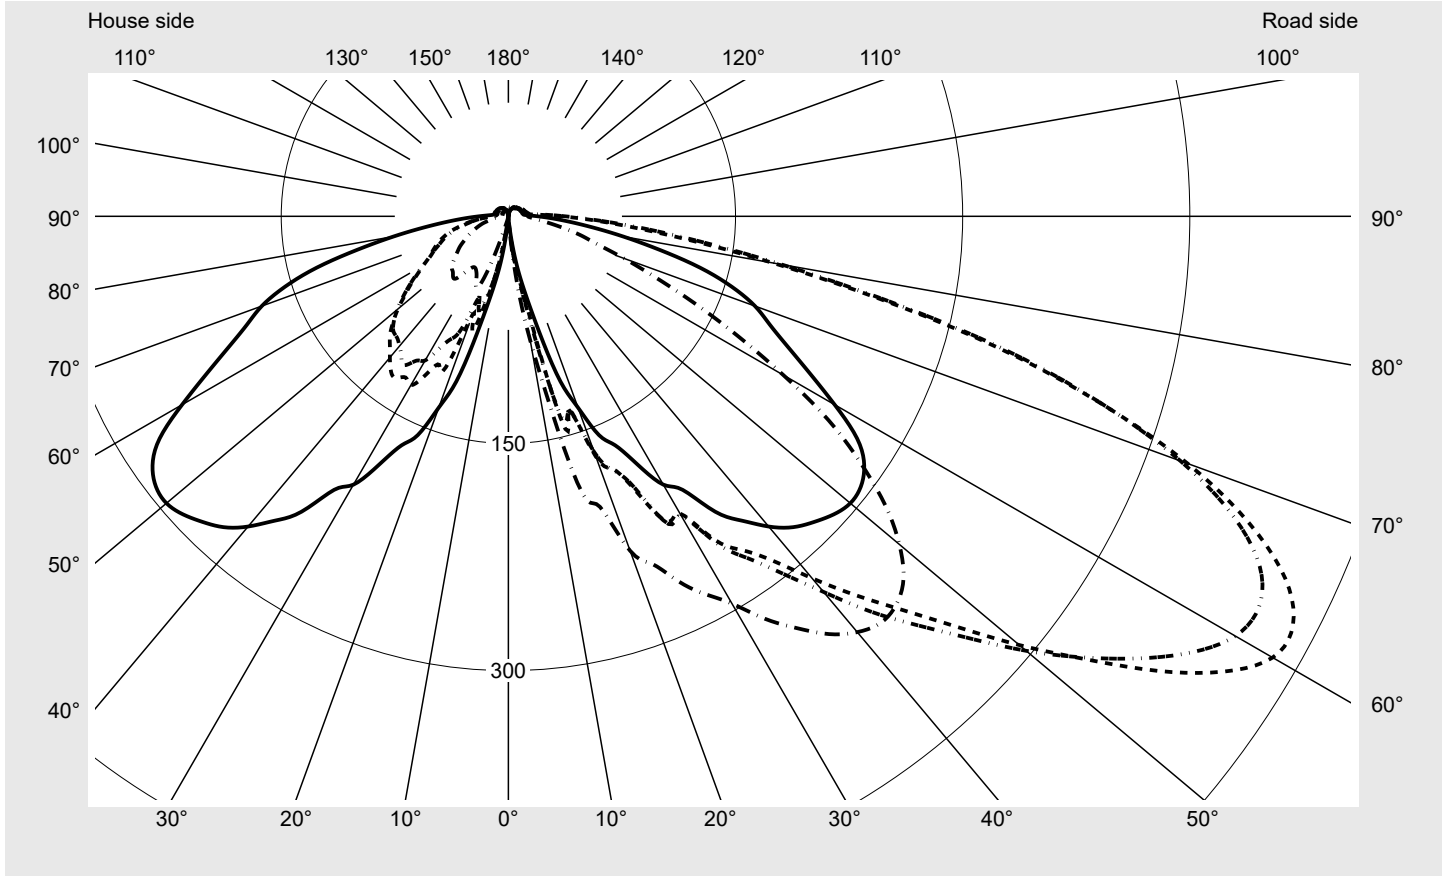

**Luminaire output ratios**

Eta	100.0%
Eta 0° - 90°	95.0%
Eta 90° - 180°	5.0%

**Luminous intensity class acc. to EN13201-2**

Class:	G1
Imax 70°	477.4
Imax 80°	183.2
Imax 90°	37.8
Imax >90°	25.1
Imax >95°	16.1


**Measurement conditions**

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> CITY-LIGHT 400 LED	<b>Order number:</b> 5XA5305EF14H + 5XA54000XS <b>EAN:</b> 4058352636350 + 4050737730073	<b>LP number</b> 59087_96
-------------------------------------	---	------------------------------

**Envelope curve in cd/klm**      **KMK 62,5°**    **KMK 60°**    **KMK 57,5°**    **KMK 55°**      **siteco**

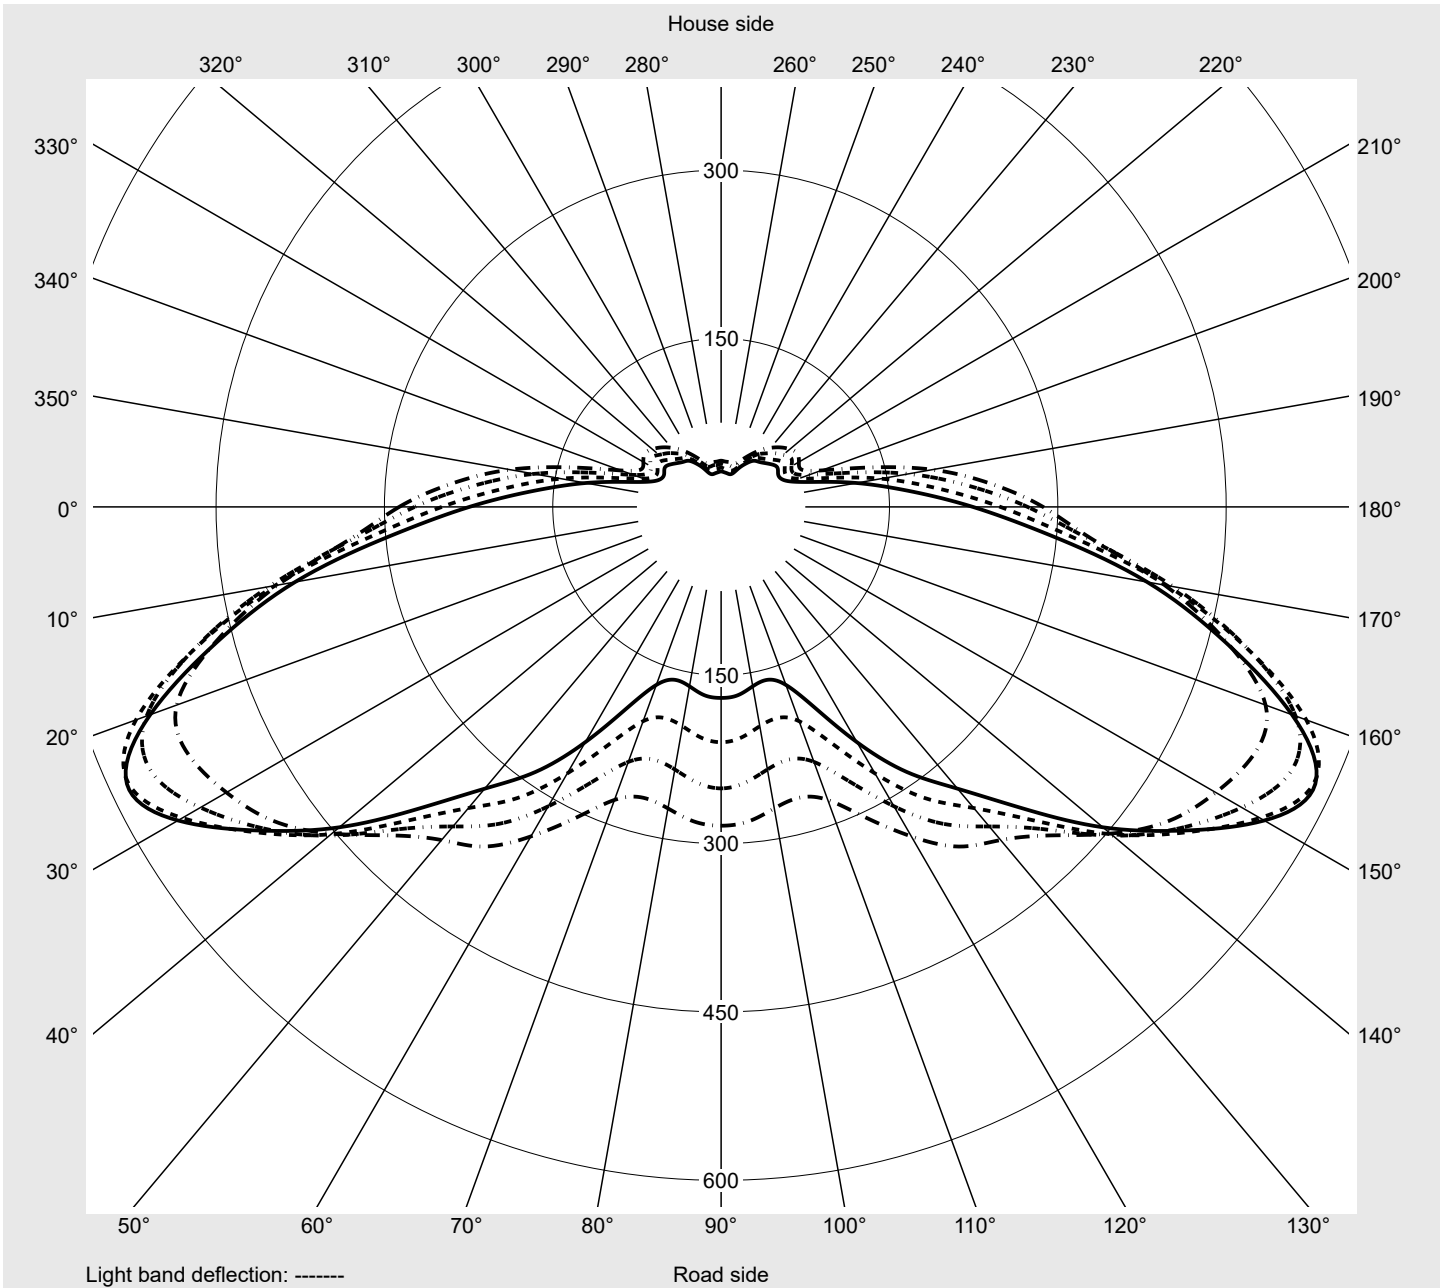

## Photometric test report

<b>Family</b> <b>CITY-LIGHT 400 LED</b>	<b>Order number: 5XA5305EF14H + 5XA54000XS</b> <b>EAN: 4058352636350 + 4050737730073</b>	<b>LP number</b> <b>59087_96</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
2,5°	1.1	1.4	1.4	1.7	1.7	1.7	1.7	1.7	1.7	2.0	2.0	2.0	2.0
5,0°	3.4	4.2	4.8	5.6	6.2	7.0	7.6	8.2	8.5	8.7	9.3	9.6	10.1
7,5°	16.1	19.2	21.7	23.7	25.4	26.8	27.9	28.5	29.6	30.2	31.6	32.7	34.7
10,0°	34.7	36.1	37.5	38.6	44.5	44.5	47.9	51.3	55.2	58.9	64.0	68.2	71.6
12,5°	53.3	63.1	67.9	65.9	71.0	78.1	85.7	95.0	101.7	102.0	103.7	104.5	106.8
15,0°	80.0	90.2	109.9	122.9	146.0	145.4	139.2	132.7	129.6	128.8	134.4	137.0	142.9
17,5°	114.4	111.9	120.3	130.2	139.5	133.6	134.7	143.2	148.5	149.1	158.1	162.9	171.0
20,0°	134.4	151.6	155.0	157.2	163.4	168.8	165.7	164.0	168.2	170.5	177.8	181.2	180.3
22,5°	156.4	153.9	166.5	184.3	184.6	180.6	181.8	184.6	184.3	178.1	182.0	192.5	204.3
25,0°	166.8	178.9	195.6	192.5	198.4	201.2	198.4	201.8	203.5	204.9	212.5	222.6	221.8
27,5°	184.9	199.8	207.4	202.6	213.6	227.4	229.1	232.5	233.6	231.1	235.0	245.2	248.0
30,0°	204.6	214.2	218.7	215.3	221.2	226.6	228.5	239.2	252.2	254.5	260.4	271.6	276.4
32,5°	214.2	219.0	231.6	232.5	242.3	253.1	255.9	268.0	280.9	282.9	291.7	305.5	308.0
35,0°	238.1	243.2	257.3	252.2	260.7	269.1	275.6	290.2	303.8	309.7	322.1	334.5	332.0
37,5°	253.3	259.3	270.2	269.7	278.1	286.6	297.3	311.4	326.3	334.2	347.7	359.6	356.5
40,0°	267.4	271.9	285.5	298.4	307.7	311.9	323.8	337.6	353.4	359.0	370.8	382.1	378.7
42,5°	278.4	287.1	305.5	322.9	333.4	339.3	353.9	366.0	378.2	383.5	392.3	400.4	393.4
45,0°	285.5	300.7	324.1	345.5	363.0	367.5	381.8	394.2	400.7	400.1	404.7	408.6	398.2
47,5°	291.4	312.8	344.6	374.2	396.2	401.0	412.3	421.0	420.7	410.6	408.9	408.6	396.5
50,0°	294.8	323.8	367.5	407.2	434.2	440.4	446.4	448.3	437.6	417.1	407.8	402.7	386.1
52,5°	293.3	330.5	386.6	437.6	474.3	480.5	478.5	470.0	448.6	417.6	400.7	389.4	366.9
55,0°	286.9	332.2	401.3	466.6	516.2	523.3	508.9	487.5	452.8	414.0	387.5	369.4	339.0
57,5°	273.1	329.1	409.2	485.0	544.7	559.6	535.7	499.1	455.7	406.1	371.7	344.6	308.0
60,0°	248.8	315.6	403.5	484.4	554.9	582.7	554.3	505.5	453.7	395.4	350.3	316.7	274.2
62,5°	224.3	295.6	385.5	465.0	541.3	584.2	558.8	502.7	444.1	379.9	327.7	288.3	242.1
65,0°	203.5	275.3	360.4	433.7	510.0	566.1	547.5	487.8	426.1	360.4	304.1	259.8	211.9
67,5°	186.8	258.7	334.5	397.9	467.5	529.5	518.5	456.5	395.6	332.8	278.4	230.5	182.3
70,0°	173.3	242.3	309.7	361.8	420.2	477.4	472.3	413.4	355.9	299.3	247.4	204.3	160.3
72,5°	154.7	217.8	274.7	317.6	363.0	409.7	410.3	360.7	307.2	256.4	215.9	188.5	136.7
75,0°	131.0	184.0	229.9	263.8	299.3	334.2	338.4	298.7	250.2	209.1	173.9	150.2	114.1
77,5°	102.3	141.5	175.6	201.5	226.3	250.2	254.7	225.4	187.4	156.1	138.4	127.1	103.1
80,0°	77.2	103.7	127.4	146.3	162.6	177.5	183.2	166.5	143.7	120.9	106.0	98.3	79.2
82,5°	56.1	73.3	88.8	101.4	111.3	121.2	127.9	121.7	107.4	89.0	74.7	67.3	52.1
85,0°	40.0	51.0	61.1	69.6	76.4	82.0	88.2	85.7	75.2	62.3	52.7	46.8	38.3
87,5°	28.2	35.2	42.0	47.6	52.1	55.0	58.0	56.9	50.7	44.0	38.6	34.9	29.9
90,0°	19.4	22.8	26.5	30.4	33.3	35.2	37.5	37.8	34.7	31.0	28.7	26.8	24.2
92,5°	13.8	15.2	16.9	18.9	20.6	22.0	24.2	25.1	24.2	22.8	22.0	21.4	20.6
95,0°	10.7	11.6	12.1	13.2	13.8	14.7	16.1	16.9	17.2	16.9	17.2	17.5	17.8
97,5°	9.9	10.4	10.7	11.0	11.3	11.8	12.1	12.7	13.2	13.5	13.8	14.7	15.2
100,0°	9.6	9.9	10.4	10.4	10.4	11.0	11.0	11.3	11.3	11.8	12.4	13.0	13.8
102,5°	9.3	9.9	9.9	10.4	10.4	10.4	10.4	10.7	11.0	11.3	11.6	11.8	12.7
105,0°	9.3	9.3	9.9	9.9	9.9	10.4	10.4	10.4	10.7	10.7	11.0	11.3	11.8
107,5°	9.3	9.3	9.6	9.9	9.9	9.9	10.1	10.4	10.4	10.4	10.7	11.0	11.3
110,0°	9.0	9.3	9.3	9.6	9.9	9.9	9.9	10.1	10.1	10.4	10.4	10.7	11.0
112,5°	8.7	9.0	9.3	9.3	9.3	9.9	9.9	9.9	9.9	10.1	10.1	10.4	10.7

## Photometric test report

<b>Family</b> <b>CITY-LIGHT 400 LED</b>	<b>Order number: 5XA5305EF14H + 5XA54000XS</b> <b>EAN: 4058352636350 + 4050737730073</b>	<b>LP number</b> <b>59087_96</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
2,5°	2.0	2.3	2.3	2.0	2.0	2.3	1.7	1.7	1.4	1.4	1.4	1.7	1.7
5,0°	10.1	10.7	11.0	11.0	11.0	11.3	3.1	2.5	2.3	2.0	2.0	1.7	2.0
7,5°	36.9	39.7	42.6	44.5	45.9	46.2	12.7	9.6	7.0	5.4	4.2	3.7	3.1
10,0°	74.4	78.1	80.6	81.4	82.6	83.4	32.7	32.1	30.4	25.6	19.4	13.5	9.0
12,5°	110.2	116.1	122.6	128.2	130.8	130.8	47.6	42.8	38.9	39.5	42.0	40.0	30.7
15,0°	151.0	160.9	169.1	180.6	187.1	189.9	74.7	70.4	63.7	63.7	60.9	54.7	50.4
17,5°	183.4	197.3	199.8	204.0	203.7	201.2	108.5	109.1	99.8	89.9	79.2	65.1	55.2
20,0°	185.4	196.7	210.8	224.9	233.0	235.0	122.0	118.9	98.3	81.2	69.0	57.2	48.2
22,5°	217.3	227.4	233.0	239.5	246.6	248.5	142.0	136.4	127.7	116.9	107.9	79.7	59.2
25,0°	232.8	244.3	252.5	261.2	265.2	266.0	156.1	148.2	130.8	118.4	108.2	89.3	67.3
27,5°	261.2	268.8	275.0	279.8	281.2	281.2	167.7	157.0	139.8	127.4	117.8	98.1	73.3
30,0°	289.7	292.8	295.3	296.7	296.7	295.3	182.6	163.4	144.6	135.5	128.8	109.9	86.5
32,5°	315.3	312.5	312.5	313.9	314.8	315.0	194.7	174.4	151.6	135.3	126.2	113.0	95.8
35,0°	337.0	331.7	330.5	331.1	331.4	332.0	219.8	191.6	163.2	143.7	130.2	120.0	111.0
37,5°	359.6	350.8	345.2	343.8	345.5	347.7	236.1	206.0	172.5	147.7	127.7	116.1	112.7
40,0°	375.9	361.5	352.2	351.4	355.6	358.4	246.6	214.2	177.2	146.5	121.7	111.9	111.0
42,5°	386.1	367.5	356.5	356.2	361.3	364.1	256.2	219.8	178.4	141.5	115.8	108.8	109.6
45,0°	387.7	365.8	354.5	355.1	359.9	362.4	262.6	222.3	177.0	135.8	110.5	107.4	108.5
47,5°	380.7	356.8	344.9	346.6	351.1	353.9	265.7	223.7	173.3	127.1	103.1	102.6	103.7
50,0°	363.8	338.2	326.0	328.9	334.8	337.0	264.0	220.1	166.0	117.8	95.2	95.8	97.5
52,5°	338.4	311.7	301.0	304.1	311.4	313.9	255.3	209.4	152.5	106.5	86.5	87.9	90.5
55,0°	305.5	277.8	268.3	272.8	281.2	284.0	240.4	191.1	135.5	95.0	78.9	80.0	82.8
57,5°	269.7	241.8	233.0	237.6	246.6	250.8	220.1	169.4	117.5	83.4	71.3	72.4	76.1
60,0°	231.9	203.2	194.7	198.4	206.3	209.7	192.5	144.8	99.8	73.5	64.8	65.4	68.2
62,5°	197.3	168.8	159.5	162.3	168.5	170.2	166.5	122.6	85.9	66.2	59.2	58.6	61.1
65,0°	166.8	138.1	127.7	129.6	135.3	135.3	145.4	105.7	76.6	61.1	55.5	54.4	55.2
67,5°	138.9	110.7	100.0	100.6	103.1	104.8	129.1	92.4	69.6	56.9	52.1	49.9	50.4
70,0°	116.1	88.8	77.8	76.9	78.3	81.2	115.8	83.1	63.7	53.3	48.8	46.2	45.4
72,5°	95.2	70.7	60.0	58.0	59.7	62.0	101.4	73.0	57.8	48.5	44.5	42.3	40.3
75,0°	78.9	56.9	47.3	45.1	47.1	50.7	86.2	62.8	51.0	43.7	40.3	38.0	35.8
77,5°	65.7	45.1	36.9	34.7	36.4	39.5	68.8	51.9	43.4	37.5	34.7	32.7	30.2
80,0°	51.3	35.2	28.7	27.3	27.9	29.3	53.5	41.7	36.1	31.6	29.3	27.6	25.4
82,5°	37.5	27.6	22.8	21.1	21.7	22.0	40.9	33.3	29.0	25.6	24.2	23.1	20.6
85,0°	29.6	22.5	18.9	17.2	17.2	17.5	31.0	25.9	23.4	21.1	19.7	18.6	16.9
87,5°	24.0	19.4	16.3	14.9	14.4	14.1	22.5	19.4	17.8	16.1	14.9	13.8	12.4
90,0°	20.6	17.5	15.8	14.4	13.2	13.0	16.3	14.7	13.2	12.1	11.0	10.1	9.3
92,5°	18.9	17.2	15.8	14.4	13.5	13.5	12.4	11.3	10.4	9.6	8.7	8.2	7.6
95,0°	17.5	16.9	15.8	14.4	13.8	13.5	10.1	9.6	9.0	8.2	7.9	7.3	6.8
97,5°	16.1	16.1	15.2	14.4	13.8	13.5	9.3	9.0	8.5	7.9	7.6	7.3	6.8
100,0°	14.7	14.9	14.4	13.8	13.2	13.0	9.3	8.7	8.5	7.9	7.3	7.0	6.8
102,5°	13.0	13.8	13.5	13.0	12.7	12.4	9.0	8.7	8.2	7.9	7.3	7.0	6.8
105,0°	12.4	12.4	12.4	12.4	11.8	11.8	8.7	8.7	8.2	7.9	7.3	7.0	6.8
107,5°	11.3	11.8	11.8	11.6	11.3	11.3	8.7	8.7	8.2	7.6	7.3	6.8	6.8
110,0°	11.0	11.3	11.3	11.3	11.3	11.3	8.7	8.5	8.2	7.6	7.3	6.8	6.8
112,5°	10.7	10.7	10.7	10.7	10.7	10.7	8.7	8.2	8.2	7.6	7.3	6.8	6.8

## Photometric test report

<b>Family</b> <b>CITY-LIGHT 400 LED</b>	<b>Order number: 5XA5305EF14H + 5XA54000XS</b> <b>EAN: 4058352636350 + 4050737730073</b>	<b>LP number</b> <b>59087_96</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	0.0	0.0
2,5°	1.7	1.7	2.0	2.0	2.0	2.0	1.7	1.7	1.7	2.0	1.7	0.0	0.0
5,0°	2.0	2.0	2.0	2.0	2.0	2.0	1.7	1.7	2.0	1.7	1.7	0.1	0.1
7,5°	2.5	2.5	2.5	2.3	2.3	2.0	2.3	2.0	2.0	2.0	1.7	0.6	0.8
10,0°	5.9	4.5	3.4	3.1	2.8	2.5	2.3	2.3	2.3	2.0	2.3	1.7	2.5
12,5°	21.4	15.5	9.3	5.4	4.2	3.4	2.8	2.8	2.5	2.5	2.3	3.5	6.0
15,0°	49.0	44.0	33.5	26.2	18.0	9.3	5.9	4.5	3.9	3.7	3.4	6.3	12.3
17,5°	49.0	42.8	42.0	38.0	29.3	26.5	23.7	18.3	12.4	9.9	9.6	8.7	21.1
20,0°	43.4	41.4	39.5	34.7	34.9	34.7	32.1	32.1	31.8	31.8	31.0	11.1	32.2
22,5°	46.2	40.3	34.9	34.4	34.1	33.8	33.5	39.5	43.4	47.3	49.0	14.0	46.2
25,0°	53.5	40.0	35.2	33.8	34.1	36.1	37.2	40.9	44.2	50.4	50.7	16.9	63.0
27,5°	57.8	43.4	37.5	36.1	38.0	40.9	43.1	44.2	44.2	46.8	45.7	20.2	83.2
30,0°	75.2	61.4	51.0	45.4	42.8	43.7	43.7	41.7	42.0	43.4	42.3	23.5	106.7
32,5°	84.5	71.6	60.9	53.3	50.4	49.3	46.5	42.3	40.6	41.4	40.6	27.3	133.9
35,0°	103.1	87.6	72.7	62.6	55.8	52.4	47.9	43.7	41.7	42.3	41.1	31.6	165.5
37,5°	108.8	95.5	82.0	73.0	65.7	60.3	53.3	48.5	46.5	47.3	46.2	35.7	201.2
40,0°	107.4	95.0	82.6	73.8	67.3	62.6	56.9	54.1	53.0	54.4	53.5	39.6	240.7
42,5°	105.7	95.0	82.6	74.1	66.8	61.4	55.5	53.8	52.7	54.7	54.1	43.2	284.0
45,0°	105.1	95.0	83.4	74.4	66.2	60.0	54.1	52.1	50.7	52.1	51.9	46.4	330.4
47,5°	100.9	91.6	81.7	73.5	65.1	58.0	52.4	50.4	49.0	50.4	50.7	49.1	379.5
50,0°	94.1	87.1	78.1	69.6	62.0	54.7	49.3	47.6	46.5	47.3	47.9	51.3	430.8
52,5°	87.6	81.4	73.5	65.4	57.8	50.7	45.7	44.2	43.7	44.0	44.5	52.6	483.4
55,0°	80.0	75.0	68.8	62.0	54.4	47.3	42.0	40.6	40.6	40.6	41.1	53.1	536.5
57,5°	72.1	67.6	62.3	57.2	50.4	44.5	38.9	37.2	37.8	37.5	38.3	52.7	589.2
60,0°	64.8	60.0	56.4	53.3	47.3	41.1	35.5	33.5	33.8	34.1	34.9	51.2	640.4
62,5°	58.9	55.2	52.4	50.2	44.8	38.6	32.4	30.2	30.4	31.0	31.6	48.9	689.3
65,0°	53.8	51.0	48.5	47.1	42.8	36.6	29.9	26.8	27.3	27.9	28.7	46.0	735.4
67,5°	49.0	46.2	44.5	44.0	40.3	34.1	27.3	24.0	24.2	24.5	25.4	42.5	777.9
70,0°	44.2	41.4	40.0	39.7	37.5	31.6	25.1	21.7	21.7	22.0	22.5	38.7	816.6
72,5°	39.2	36.6	35.8	35.2	33.0	27.9	22.8	19.7	18.9	19.2	19.7	34.1	850.7
75,0°	34.1	31.8	31.0	30.4	27.9	23.4	19.2	17.2	16.3	16.3	16.9	28.6	879.3
77,5°	27.9	26.2	25.1	24.5	22.5	18.9	15.8	13.8	13.5	13.5	13.5	22.6	901.9
80,0°	22.8	21.4	20.3	19.4	17.8	15.5	13.0	11.6	11.0	11.0	11.3	17.2	919.1
82,5°	18.6	16.9	16.1	15.5	13.8	12.4	10.4	9.3	8.7	8.7	9.0	12.6	931.6
85,0°	14.9	13.8	12.7	12.1	11.0	9.3	8.5	7.6	7.0	6.8	6.8	9.2	940.8
87,5°	11.0	9.9	9.0	8.2	7.9	7.0	6.5	5.9	5.4	5.4	5.1	6.6	947.4
90,0°	8.5	7.6	7.0	6.5	5.9	5.6	5.1	5.1	4.5	4.5	4.5	4.8	952.2
92,5°	7.0	6.5	6.2	5.6	5.4	5.1	4.5	4.5	3.9	4.2	3.9	3.6	955.8
95,0°	6.5	6.2	5.6	5.6	5.1	5.1	4.5	4.5	3.9	3.9	3.9	3.0	958.8
97,5°	6.5	6.2	5.6	5.6	5.1	5.1	4.5	4.5	4.2	3.9	3.9	2.7	961.4
100,0°	6.5	6.2	5.6	5.6	5.1	5.1	4.5	4.5	3.9	3.9	3.9	2.5	963.9
102,5°	6.5	6.2	5.6	5.6	5.1	5.1	4.5	4.5	4.2	3.9	3.9	2.4	966.3
105,0°	6.2	5.9	5.6	5.6	5.1	5.1	4.5	4.5	3.9	3.9	3.9	2.3	968.6
107,5°	6.5	5.9	5.6	5.6	5.1	5.1	4.5	4.5	3.9	3.9	3.9	2.2	970.8
110,0°	6.2	5.9	5.6	5.6	5.1	5.1	4.5	4.5	4.2	4.2	3.9	2.1	972.9
112,5°	6.5	6.2	5.6	5.6	5.1	5.1	4.5	4.5	4.2	4.2	3.9	2.1	975.0

## Photometric test report

<b>Family</b> <b>CITY-LIGHT 400 LED</b>	<b>Order number: 5XA5305EF14H + 5XA54000XS</b> <b>EAN: 4058352636350 + 4050737730073</b>	<b>LP number</b> <b>59087_96</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	8.7	9.0	9.0	9.3	9.3	9.6	9.6	9.6	9.9	9.9	10.1	10.1	10.1
117,5°	8.7	8.7	9.0	9.3	9.3	9.3	9.3	9.3	9.6	9.6	9.9	9.9	10.1
120,0°	8.5	8.7	8.7	9.0	9.0	9.0	9.3	9.3	9.3	9.3	9.6	9.6	9.9
122,5°	8.5	8.5	8.7	8.7	8.7	9.0	9.0	9.0	9.0	9.3	9.3	9.6	9.6
125,0°	8.2	8.5	8.5	8.7	8.7	8.7	9.0	9.0	9.0	9.0	9.0	9.3	9.3
127,5°	8.2	8.2	8.5	8.5	8.5	8.7	8.7	8.7	8.7	8.7	9.0	9.0	9.0
130,0°	7.9	7.9	8.2	8.5	8.2	8.5	8.5	8.5	8.5	8.7	8.7	8.7	9.0
132,5°	7.9	7.9	7.9	8.2	8.2	8.2	8.2	8.5	8.5	8.5	8.5	8.7	8.7
135,0°	7.3	7.6	7.9	7.9	7.9	7.9	8.2	8.2	8.2	8.2	8.2	8.5	8.5
137,5°	7.3	7.3	7.3	7.6	7.6	7.9	7.9	7.9	7.9	7.9	8.2	8.2	8.5
140,0°	6.8	7.0	7.3	7.3	7.3	7.6	7.6	7.6	7.6	7.9	7.9	7.9	7.9
142,5°	6.8	6.8	7.0	7.0	7.3	7.3	7.3	7.3	7.3	7.3	7.6	7.9	7.9
145,0°	6.8	6.8	6.8	6.8	7.0	7.0	7.3	7.3	7.3	7.3	7.3	7.3	7.6
147,5°	6.2	6.8	6.8	6.8	6.8	6.8	6.8	7.0	7.3	7.3	7.3	7.3	7.3
150,0°	6.2	6.2	6.2	6.8	6.8	6.8	6.8	6.8	6.8	6.8	7.0	7.0	7.3
152,5°	6.2	6.2	6.2	6.2	6.2	6.2	6.8	6.8	6.8	6.8	6.8	6.8	6.8
155,0°	5.6	5.6	5.6	5.9	6.2	6.2	6.2	6.2	6.2	6.2	6.2	6.5	6.8
157,5°	5.1	5.1	5.4	5.6	5.6	5.6	5.6	5.6	5.6	5.6	6.2	6.2	6.2
160,0°	4.5	4.8	5.1	5.1	5.1	5.1	5.1	5.1	5.1	5.1	5.6	5.6	5.6
162,5°	3.9	3.9	4.2	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.8	5.1
165,0°	3.4	3.4	3.4	3.9	3.9	3.9	3.9	3.9	3.9	3.9	3.9	3.9	3.9
167,5°	2.8	2.8	2.8	2.8	2.8	3.1	3.1	3.1	3.1	3.1	3.4	3.4	3.4
170,0°	2.3	2.3	2.3	2.3	2.3	2.5	2.3	2.3	2.3	2.3	2.3	2.5	2.3
172,5°	2.3	2.0	2.3	2.3	2.3	2.0	2.3	2.3	2.0	2.0	2.3	2.3	2.3
175,0°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
177,5°	1.4	1.1	1.4	1.4	1.4	1.1	1.4	1.1	1.1	1.1	1.4	1.7	1.7
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>CITY-LIGHT 400 LED</b>	<b>Order number: 5XA5305EF14H + 5XA54000XS</b> <b>EAN: 4058352636350 + 4050737730073</b>	<b>LP number</b> <b>59087_96</b>
--	---	-------------------------------------

<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>	<b>siteco</b>
---	-----------------------------------	---------------

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
115,0°	10.1	10.4	10.4	10.1	10.7	10.7	8.7	8.2	7.9	7.6	7.3	7.0	6.8
117,5°	10.1	10.1	10.1	10.1	10.1	10.1	8.2	8.2	7.9	7.6	7.3	6.8	6.8
120,0°	9.9	10.1	10.1	10.1	10.1	10.1	8.5	8.2	7.9	7.6	7.3	7.0	6.8
122,5°	9.6	9.6	9.6	9.6	9.6	9.6	8.2	8.2	7.9	7.3	7.3	7.0	6.8
125,0°	9.6	9.6	9.6	9.6	9.6	9.6	8.2	7.9	7.6	7.3	7.3	6.8	6.8
127,5°	9.0	9.0	9.3	9.3	9.3	9.6	7.9	7.9	7.6	7.3	7.0	6.8	6.8
130,0°	9.0	9.0	9.0	9.0	9.0	9.0	7.9	7.6	7.6	7.3	7.0	6.8	6.5
132,5°	8.7	9.0	9.0	9.0	9.0	9.0	7.6	7.3	7.3	7.0	6.8	6.8	6.2
135,0°	8.5	8.5	8.5	8.5	8.5	8.5	7.3	7.3	7.0	6.8	6.8	6.5	6.2
137,5°	8.5	8.5	8.5	8.5	8.5	8.5	7.0	6.8	6.8	6.5	6.5	6.2	6.2
140,0°	7.9	7.9	7.9	7.9	7.9	7.9	6.8	6.8	6.5	6.2	6.2	5.9	5.6
142,5°	7.9	7.9	7.9	7.9	7.9	7.9	6.8	6.5	6.5	6.2	6.2	5.9	5.6
145,0°	7.6	7.6	7.9	7.6	7.9	7.3	6.5	6.5	6.2	6.2	5.9	5.6	5.6
147,5°	7.3	7.3	7.3	7.3	7.3	7.3	6.2	6.2	6.2	6.2	5.9	5.6	5.6
150,0°	7.3	7.3	7.3	7.3	7.3	7.3	6.2	6.2	6.2	5.9	5.6	5.6	5.6
152,5°	6.8	6.8	6.8	6.8	6.8	6.8	6.2	5.9	5.6	5.6	5.6	5.6	5.6
155,0°	6.8	6.8	6.8	6.8	6.8	6.8	5.6	5.6	5.6	5.6	5.6	5.4	5.4
157,5°	6.2	6.2	6.2	6.2	6.2	6.2	5.1	5.1	5.1	5.1	5.1	5.1	5.4
160,0°	5.6	5.6	5.6	5.6	5.6	5.6	4.5	4.5	4.5	4.5	4.8	5.1	5.1
162,5°	5.1	5.1	5.1	5.1	5.1	5.1	3.9	3.9	3.9	3.9	3.9	3.9	4.2
165,0°	3.9	3.9	4.2	3.9	3.9	3.9	3.4	3.4	3.4	3.4	3.4	3.4	3.4
167,5°	3.4	3.4	3.4	3.4	3.4	3.4	2.8	2.8	2.8	2.8	2.8	2.8	2.8
170,0°	2.8	2.5	2.5	2.5	2.5	2.8	2.3	2.3	2.3	2.3	2.3	2.3	2.3
172,5°	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.0	1.7	1.7	1.7	1.7	1.7
175,0°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
177,5°	1.4	1.4	1.4	1.7	1.4	1.7	1.1	1.1	1.1	1.1	1.1	1.1	1.4
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>CITY-LIGHT 400 LED</b>	<b>Order number: 5XA5305EF14H + 5XA54000XS</b> <b>EAN: 4058352636350 + 4050737730073</b>	<b>LP number</b> <b>59087_96</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	6.5	6.2	5.6	5.6	5.1	5.1	4.5	4.5	4.5	4.5	4.5	2.0	977.0
117,5°	6.5	6.2	5.9	5.6	5.1	5.1	5.1	4.5	4.5	4.5	4.5	1.9	978.9
120,0°	6.5	6.2	5.6	5.6	5.4	5.1	5.1	4.5	4.5	4.5	4.5	1.9	980.7
122,5°	6.5	6.2	5.9	5.6	5.1	5.1	5.1	4.5	4.5	4.5	4.5	1.8	982.5
125,0°	6.5	6.2	5.9	5.6	5.1	5.1	5.1	4.8	4.5	4.5	4.5	1.7	984.2
127,5°	6.2	6.2	5.6	5.6	5.4	5.1	5.1	4.8	4.5	4.5	4.5	1.6	985.9
130,0°	6.2	5.9	5.6	5.6	5.4	5.1	5.1	5.1	4.5	4.5	4.5	1.5	987.4
132,5°	6.2	5.9	5.6	5.6	5.4	5.1	5.1	4.8	4.5	4.5	4.5	1.5	988.9
135,0°	5.9	5.9	5.6	5.4	5.1	5.1	5.1	4.8	4.5	4.5	4.5	1.4	990.2
137,5°	5.6	5.6	5.4	5.1	5.1	5.1	4.8	4.5	4.5	4.5	4.5	1.3	991.5
140,0°	5.6	5.4	5.4	5.1	5.1	4.8	4.5	4.5	4.5	4.5	4.5	1.2	992.7
142,5°	5.6	5.4	5.1	5.1	5.1	4.5	4.5	4.5	4.5	4.5	4.5	1.1	993.8
145,0°	5.6	5.4	5.1	5.1	5.1	4.8	4.5	4.5	4.5	4.5	4.5	1.0	994.8
147,5°	5.6	5.4	5.1	5.1	5.1	4.8	4.5	4.5	4.5	4.5	4.5	0.9	995.7
150,0°	5.6	5.4	5.1	5.1	5.1	5.1	4.8	4.5	4.5	4.5	4.5	0.8	996.5
152,5°	5.4	5.4	5.1	5.1	5.1	5.1	4.8	4.8	4.5	4.5	4.5	0.8	997.3
155,0°	5.4	5.4	5.1	5.1	5.1	4.8	4.8	4.5	4.5	4.5	4.5	0.7	997.9
157,5°	5.6	5.4	5.4	5.1	5.1	5.1	4.8	4.8	4.5	4.5	4.5	0.6	998.5
160,0°	5.4	5.1	5.1	4.8	4.8	4.5	4.5	4.5	4.5	4.2	3.9	0.5	999.0
162,5°	4.2	3.9	3.9	3.9	3.9	3.9	3.9	3.9	3.9	3.9	3.9	0.4	999.3
165,0°	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	0.3	999.6
167,5°	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.5	2.8	2.8	2.8	0.2	999.8
170,0°	2.3	2.5	2.5	2.5	2.5	2.3	2.3	2.3	2.3	2.3	2.3	0.1	999.9
172,5°	2.0	2.0	2.0	2.0	1.7	1.7	1.7	1.7	1.7	1.7	1.7	0.1	999.9
175,0°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	0.0	1000.0
177,5°	1.4	1.1	1.4	1.7	1.7	1.4	1.4	1.7	1.7	1.7	1.7	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0



## Photometric test report

<b>Family</b> <b>CITY-LIGHT 400 LED</b>	<b>Order number: 5XA5305EF14H + 5XA54000XS</b> <b>EAN: 4058352636350 + 4050737730073</b>	<b>LP number</b> <b>59087_96</b>
<b>Dimming levels table</b>		<b>environmental temperature: 25°C</b>
<b>siteco</b>		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption	Power consumption	Power consumption
				[W] start of lifetime	[W] end of lifetime	[W] average
100	254	254	1450	10.5	10.8	10.6
95	241	252	1376	10.0	10.3	10.2
90	229	250	1307	9.4	9.8	9.6
85	216	248	1233	8.9	9.2	9.0
80	203	246	1159	8.3	8.7	8.5
75	190	243	1085	7.8	8.1	8.0
70	178	241	1016	7.3	7.6	7.4
65	165	238	942	6.9	7.1	7.0
60	152	235	868	6.4	6.6	6.5
55	140	232	799	5.9	6.1	6.0
50	127	229	725	5.4	5.6	5.5
45	114	225	651	5.0	5.2	5.1
40	102	221	582	4.6	4.7	4.6
35	89	216	508	4.1	4.3	4.2
30	76	210	434	3.7	3.8	3.8
28	72	208	411	3.5	3.7	3.6