

Photometric test report

Family
Floodlight FL21 mini

Order number: 5XA7772C1C1A
EAN: 4058352654811

LP number
58550_100



Version mounting bracket
Optic direct, asymmetric extremely wide distribution A610002
Cover toughened safety glass
Lamps LED 2200 K | CRI ≥ 70
Controlgear ECG SITECO iQ
Rated values Net luminous flux = 9930 lm
Power consumption = 87.2 W
Luminous efficacy = 113.9 lm/W

serial
documentation
26.08.2022

siteco

Luminous intensity in cd/klm

C180-0

C190-10

C195-15

C270-90

Imax: 745 cd/klm



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	640.5
Imax 80°	24.8
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family
Floodlight FL21 mini

Order number: 5XA7772C1C1A
EAN: 4058352654811

LP number
58550_100

Envelope curve in cd/klm

KMK 65°


KMK 62,5°

KMK 60°

KMK 57,5°

sit

eco

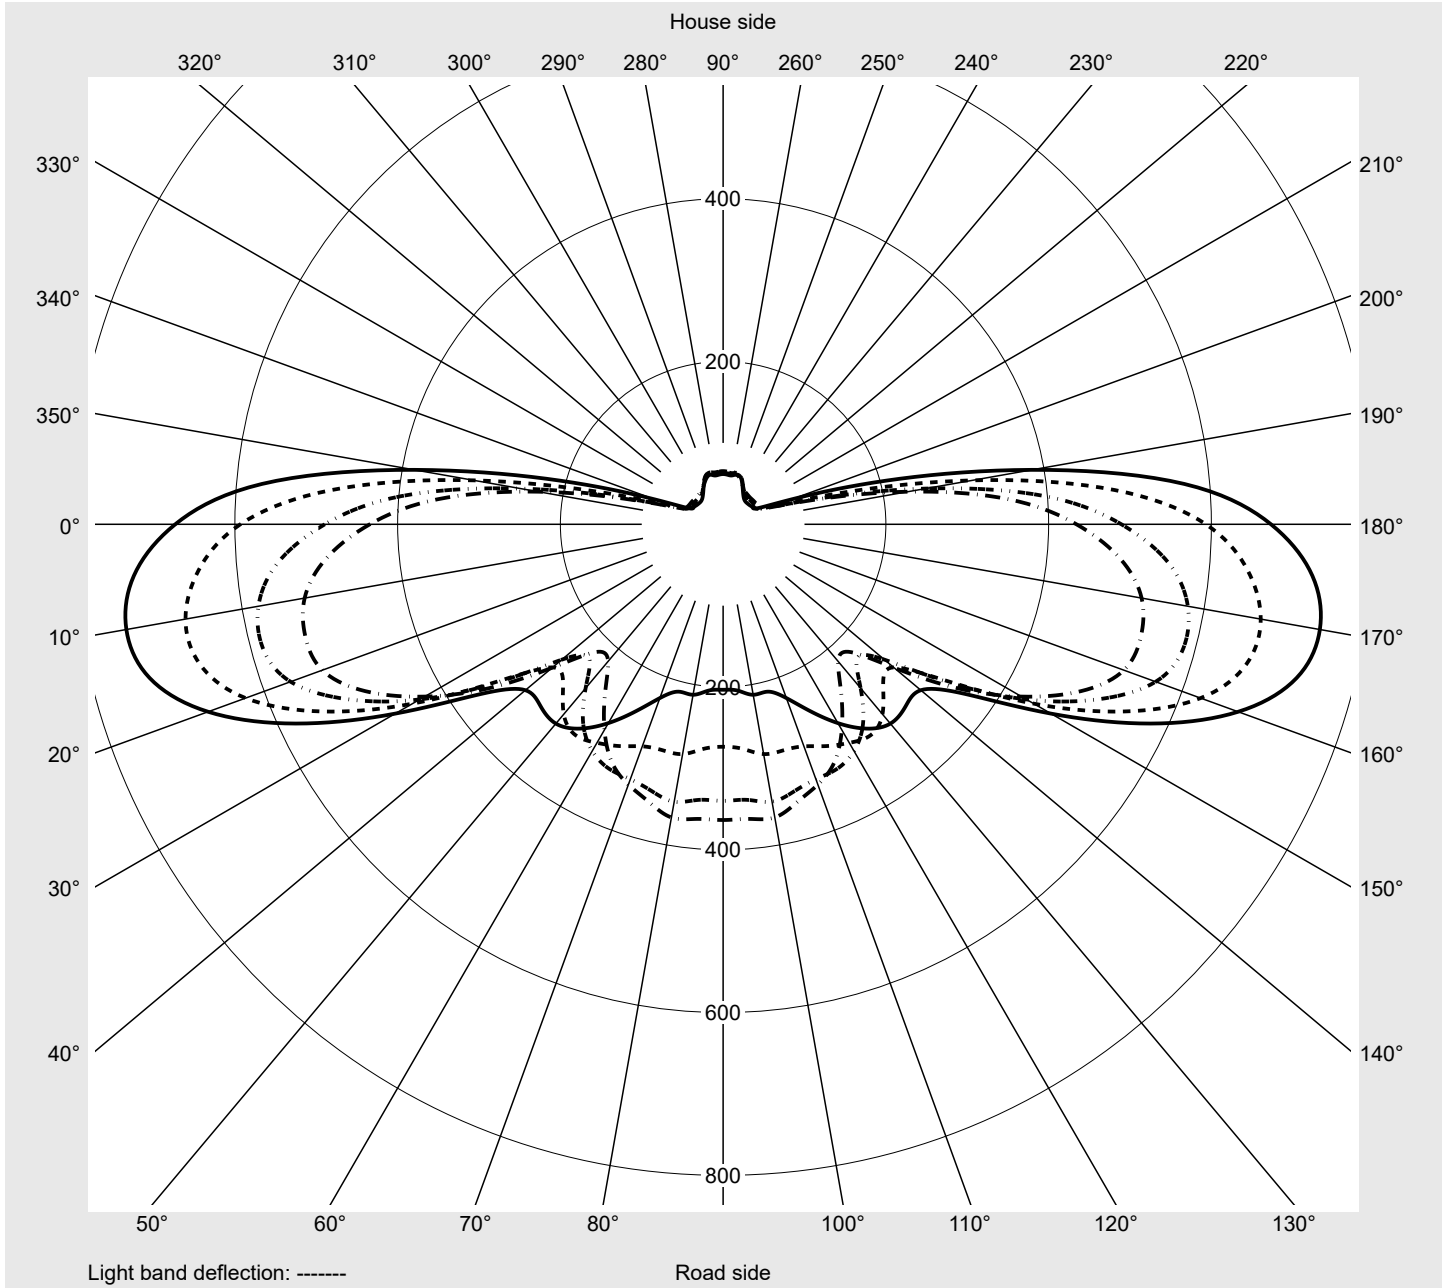

Photometric test report

Family Floodlight FL21 mini	Order number: 5XA7772C1C1A EAN: 4058352654811	LP number 58550_100
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5
2,5°	239.2	240.6	242.2	243.7	245.4	247.0	248.5	249.7	250.8	251.8	252.8	253.7	254.4
5,0°	239.5	242.7	245.9	249.0	251.9	254.7	257.2	259.4	261.3	263.0	264.5	265.8	266.9
7,5°	239.6	244.5	249.0	253.2	257.1	260.7	264.0	266.7	269.0	270.9	272.5	273.9	275.0
10,0°	240.7	247.3	253.2	258.3	262.9	266.8	270.2	272.8	274.8	276.2	277.6	279.1	280.5
12,5°	242.1	250.3	257.5	263.6	268.7	272.8	276.1	278.5	280.3	281.7	282.9	284.2	285.5
15,0°	243.2	253.2	261.6	268.3	273.6	277.7	281.0	283.8	286.1	287.9	289.3	290.5	291.6
17,5°	244.4	256.2	265.8	273.1	278.6	282.6	286.0	288.9	291.7	294.1	296.3	298.1	299.7
20,0°	247.2	262.0	273.1	280.6	285.3	288.9	292.0	294.9	297.5	300.4	303.7	306.4	308.1
22,5°	250.6	267.7	280.5	289.0	293.0	295.6	299.1	302.4	305.2	308.2	312.1	315.5	317.9
25,0°	253.7	271.8	285.2	293.6	298.4	302.0	305.7	309.5	313.2	316.6	319.7	323.6	326.3
27,5°	259.5	280.4	295.5	304.9	310.5	314.1	316.1	318.8	322.5	326.2	329.4	331.8	333.4
30,0°	262.3	285.3	301.7	311.7	318.2	323.2	326.6	328.9	330.9	334.2	335.4	334.9	332.8
32,5°	266.9	291.7	309.3	319.4	325.5	330.3	334.7	338.2	339.3	338.9	336.5	331.7	325.8
35,0°	273.0	300.4	319.1	330.7	337.7	342.5	346.3	348.7	347.4	340.9	331.9	324.2	315.2
37,5°	280.8	310.7	331.0	344.1	352.2	356.8	359.5	358.9	351.7	339.1	323.9	313.3	300.6
40,0°	291.0	324.4	346.4	360.2	368.8	374.4	376.5	369.9	354.1	333.7	312.4	293.8	275.9
42,5°	303.8	340.0	363.4	378.0	386.3	391.3	391.2	378.8	354.2	323.4	294.1	267.2	243.1
45,0°	316.2	356.0	380.1	394.5	403.2	407.8	401.4	380.8	347.9	309.8	273.1	238.7	207.4
47,5°	333.1	374.5	399.2	413.4	421.6	424.7	412.0	378.8	338.2	294.3	248.5	208.9	176.1
50,0°	349.4	394.1	420.1	434.7	442.0	440.1	418.4	377.5	326.4	275.1	222.7	184.4	169.2
52,5°	371.1	416.7	444.9	459.9	464.5	452.4	419.9	370.6	310.9	252.5	204.0	186.7	195.6
55,0°	396.9	446.5	476.8	490.8	491.6	467.2	422.8	361.7	293.9	233.1	204.4	210.0	235.1
57,5°	434.2	490.3	522.2	531.6	524.1	485.2	423.4	351.0	274.1	222.1	219.9	252.9	291.6
60,0°	489.5	549.8	579.9	585.8	565.7	508.8	430.4	338.9	258.8	233.1	262.9	299.7	321.7
62,5°	593.3	647.0	670.9	665.5	624.4	544.2	440.8	335.5	273.5	278.1	304.7	316.3	310.1
65,0°	673.3	726.9	744.7	729.6	673.5	579.4	465.3	363.6	317.2	316.8	319.7	306.5	282.1
67,5°	692.3	734.5	738.2	706.3	642.7	556.8	463.7	382.3	347.7	336.9	316.9	279.9	236.1
70,0°	629.0	640.5	619.1	578.0	519.0	457.0	394.4	353.3	340.5	324.9	286.4	233.9	198.5
72,5°	327.9	325.8	291.9	301.0	323.1	314.1	287.3	268.5	257.1	233.5	204.7	182.0	158.1
75,0°	97.0	63.1	54.8	75.1	154.3	189.6	178.5	152.6	113.5	87.4	107.1	102.2	86.8
77,5°	32.8	28.1	25.1	25.4	52.2	80.6	76.8	38.5	23.7	25.5	35.7	35.5	32.3
80,0°	20.7	17.4	17.1	16.6	19.5	24.8	19.4	13.3	12.8	13.0	14.2	16.7	16.3
82,5°	10.1	9.1	9.8	10.2	9.5	9.2	8.9	7.5	7.6	7.7	7.4	8.2	8.6
85,0°	3.6	3.2	3.4	3.4	3.3	3.4	3.4	3.4	3.4	3.4	3.2	3.2	3.1
87,5°	1.2	1.2	1.2	1.1	1.1	1.0	0.9	0.9	0.8	0.8	0.7	0.6	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL21 mini	Order number: 5XA7772C1C1A EAN: 4058352654811	LP number 58550_100
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5
2,5°	255.0	255.6	256.1	256.5	256.9	257.0	237.6	236.0	234.3	232.7	231.2	229.8	228.5
5,0°	267.7	268.3	269.0	269.7	270.2	270.3	236.0	232.3	228.7	225.1	221.6	218.2	215.0
7,5°	275.7	276.2	276.8	277.5	278.0	278.2	234.1	228.5	222.8	217.2	211.7	206.5	201.3
10,0°	281.4	282.1	282.9	283.9	284.6	284.9	233.4	225.6	217.7	209.9	202.2	194.8	187.6
12,5°	286.9	288.2	289.4	290.5	291.4	291.7	232.7	222.8	212.6	202.7	192.8	183.2	173.6
15,0°	293.1	295.1	297.1	298.7	299.6	299.8	231.8	219.5	207.0	194.8	182.8	171.1	159.1
17,5°	301.1	303.2	305.8	307.7	308.7	309.1	230.8	216.0	201.1	186.5	171.9	157.5	143.0
20,0°	309.2	310.8	313.6	315.4	316.0	316.0	230.5	213.1	195.5	178.2	160.7	143.4	127.2
22,5°	318.3	319.3	321.7	324.1	324.3	324.1	231.1	210.8	190.3	170.2	149.8	130.0	112.4
25,0°	327.4	327.5	328.5	330.3	329.8	329.1	232.1	208.5	184.8	161.1	138.0	116.2	95.6
27,5°	332.5	329.9	328.9	329.9	328.0	325.9	234.0	206.8	179.1	151.6	124.4	97.9	81.4
30,0°	329.4	323.9	321.5	321.3	317.4	313.1	234.1	203.6	172.4	141.4	106.9	82.4	76.2
32,5°	319.2	312.0	307.3	304.1	295.6	290.9	235.8	201.7	166.6	129.7	91.2	75.8	73.5
35,0°	305.5	295.3	287.6	278.7	266.3	263.1	238.3	200.3	161.0	115.5	79.9	72.0	70.9
37,5°	285.5	270.6	258.3	240.6	226.8	225.0	242.2	198.9	151.7	100.3	73.3	69.3	68.5
40,0°	255.6	237.1	219.7	195.2	185.0	183.7	248.0	198.8	140.1	85.3	68.2	66.5	65.9
42,5°	218.8	194.2	173.9	156.4	149.0	148.0	254.8	201.0	131.0	77.5	64.8	63.6	63.2
45,0°	181.0	156.7	141.7	130.5	126.7	127.1	263.3	201.7	120.4	71.4	61.7	60.7	60.4
47,5°	157.5	145.8	141.0	141.9	141.4	144.0	275.1	206.3	118.8	68.7	59.2	58.2	57.8
50,0°	172.0	175.4	180.4	188.9	191.2	194.6	287.2	210.9	113.6	65.4	56.6	55.6	55.1
52,5°	211.8	224.2	237.9	253.7	258.4	261.7	302.8	214.9	112.5	63.4	54.2	53.1	52.5
55,0°	265.3	288.2	308.0	327.0	329.2	331.6	321.4	220.0	112.7	61.3	51.8	50.5	50.0
57,5°	323.1	340.4	353.1	365.8	363.4	363.4	352.4	230.7	116.6	60.1	49.3	48.0	47.5
60,0°	331.5	333.4	339.3	346.1	339.9	339.9	397.0	252.7	122.8	59.8	46.9	45.5	45.0
62,5°	300.7	290.4	287.4	286.7	277.0	273.4	483.0	311.0	147.5	64.8	45.3	43.3	42.6
65,0°	253.4	227.2	212.9	212.7	205.1	203.4	568.9	385.2	207.0	89.5	46.7	41.7	40.4
67,5°	201.9	183.2	157.4	145.0	134.7	137.1	586.1	419.8	251.0	133.6	58.6	42.4	37.8
70,0°	179.3	159.0	76.7	59.5	55.4	61.0	469.1	325.6	213.5	120.4	59.8	44.4	36.6
72,5°	141.1	117.8	36.2	28.5	28.5	27.5	196.0	136.9	113.2	71.9	45.2	39.0	32.2
75,0°	76.2	62.7	25.0	21.1	20.9	19.7	57.7	36.1	37.9	34.6	27.7	25.8	23.8
77,5°	31.6	29.8	17.0	14.9	14.6	13.4	26.4	22.7	22.4	20.9	18.3	17.0	16.6
80,0°	14.2	13.2	10.0	9.3	8.7	8.1	18.9	15.6	13.6	13.0	11.9	11.2	11.1
82,5°	7.0	6.3	5.3	4.8	4.3	4.0	10.3	8.8	7.5	7.3	8.1	6.8	6.7
85,0°	2.6	2.3	1.9	1.7	1.7	1.6	3.8	3.4	3.2	3.3	3.7	3.4	3.3
87,5°	0.6	0.6	0.6	0.6	0.6	0.6	1.3	1.3	1.3	1.4	1.3	1.3	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL21 mini	Order number: 5XA7772C1C1A EAN: 4058352654811	LP number 58550_100
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	0.4	0.4
2,5°	227.2	225.9	224.6	223.6	222.7	221.9	221.2	220.5	220.1	219.9	219.9	2.9	3.2
5,0°	212.0	209.0	206.3	203.8	201.6	199.6	197.9	196.6	195.6	195.2	195.0	5.6	8.9
7,5°	196.3	191.7	187.4	183.4	179.7	176.5	173.7	171.6	170.0	169.2	168.9	8.3	17.1
10,0°	180.5	173.8	167.5	161.7	156.3	151.7	147.7	144.7	142.5	141.3	140.9	10.7	27.9
12,5°	164.1	154.9	146.3	138.5	131.5	125.6	120.8	117.2	114.6	113.1	112.6	13.1	40.9
15,0°	147.0	135.8	125.6	116.9	109.5	103.6	99.0	95.9	93.7	92.4	91.9	15.3	56.2
17,5°	129.3	117.1	105.9	95.3	87.4	82.1	78.6	76.3	75.0	74.1	73.9	17.4	73.6
20,0°	113.2	98.1	85.6	79.3	76.7	75.0	73.8	72.9	72.0	71.4	71.2	19.7	93.3
22,5°	95.0	82.3	78.1	76.5	75.2	73.9	72.6	71.5	70.5	69.8	69.6	22.2	115.5
25,0°	81.5	77.6	76.4	75.4	74.3	72.9	71.5	70.2	69.0	68.1	67.7	24.6	140.0
27,5°	77.2	75.9	75.2	74.4	73.3	71.9	70.3	68.8	67.5	66.4	65.8	27.0	167.1
30,0°	75.0	74.4	74.0	73.4	72.4	71.1	69.4	67.6	66.1	64.8	64.1	29.1	196.2
32,5°	73.0	72.8	72.7	72.3	71.5	70.1	68.3	66.4	64.7	63.1	62.3	31.0	227.2
35,0°	70.7	70.7	71.1	70.8	70.1	68.7	66.8	64.7	62.8	61.1	60.1	32.6	259.8
37,5°	68.4	68.7	69.0	68.9	68.3	67.0	65.2	63.0	60.9	58.9	57.7	33.9	293.7
40,0°	65.9	66.3	66.6	66.6	66.1	64.9	62.8	60.8	58.8	56.8	55.7	34.8	328.4
42,5°	63.2	63.5	63.8	64.2	63.5	62.2	60.9	59.1	57.1	55.1	53.9	35.4	363.8
45,0°	60.3	60.4	60.9	60.8	60.4	59.8	59.0	57.6	56.0	54.0	52.7	35.9	399.7
47,5°	57.5	57.6	57.6	57.5	57.5	57.4	57.2	56.6	55.4	53.4	52.3	37.4	437.1
50,0°	54.8	54.7	54.2	54.4	54.7	55.2	55.8	56.1	55.4	53.9	52.9	40.1	477.3
52,5°	52.3	51.8	51.5	51.8	52.6	54.0	55.8	57.1	56.9	56.1	55.4	44.0	521.3
55,0°	49.7	49.1	49.3	49.8	51.2	54.0	57.2	59.7	59.7	59.4	59.0	49.0	570.3
57,5°	47.0	46.7	47.1	48.1	50.3	54.9	60.1	63.2	62.8	62.9	63.2	54.1	624.4
60,0°	44.4	44.3	44.9	46.7	50.3	56.4	63.0	65.8	64.7	64.9	65.4	58.2	682.6
62,5°	41.9	41.8	42.6	45.2	49.8	56.6	63.2	65.4	63.8	64.3	64.7	62.7	745.4
65,0°	39.4	39.1	40.3	43.4	48.5	55.5	62.0	63.2	60.9	61.1	61.7	66.5	811.9
67,5°	36.2	35.8	37.1	40.3	45.6	52.7	58.1	58.5	55.7	55.6	56.0	65.8	877.7
70,0°	32.2	31.7	33.2	36.7	41.9	47.8	51.8	51.5	48.8	48.0	48.6	56.2	933.9
72,5°	27.3	26.7	28.3	31.5	36.0	40.7	43.3	42.4	39.8	38.7	39.9	35.2	969.1
75,0°	21.9	21.8	23.2	26.0	29.5	33.0	34.3	33.1	30.6	30.0	31.7	16.3	985.4
77,5°	16.5	16.7	17.8	19.8	22.4	24.6	25.4	23.9	21.9	21.5	22.1	7.4	992.8
80,0°	11.3	11.4	12.2	13.6	15.1	16.4	16.6	15.2	13.9	13.5	13.6	3.9	996.7
82,5°	6.7	6.8	7.2	7.7	8.1	8.4	8.2	7.5	6.9	6.7	6.7	2.1	998.8
85,0°	3.2	3.1	3.2	3.3	3.4	3.6	3.5	3.1	2.8	2.7	2.7	0.8	999.7
87,5°	1.2	1.2	1.1	1.0	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL21 mini	Order number: 5XA7772C1C1A EAN: 4058352654811	LP number 58550_100
Dimming levels table		environmental temperature: 25°C
		siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	9930	87.2	92.1	89.6
95	241	252	9422	81.8	86.5	84.2
90	229	250	8953	77.1	81.4	79.2
85	216	248	8444	72.0	76.0	74.0
80	203	246	7936	67.1	70.7	68.9
75	190	243	7428	62.2	65.7	64.0
70	178	241	6959	57.9	61.0	59.4
65	165	238	6451	53.2	56.1	54.6
60	152	235	5942	48.5	51.3	49.9
55	140	232	5473	44.4	46.8	45.6
50	127	229	4965	40.1	42.2	41.2
45	114	225	4457	35.8	37.7	36.8
40	102	221	3988	31.9	33.5	32.7
35	89	216	3479	27.8	29.2	28.5
30	76	210	2971	23.8	25.0	24.4
25	63	203	2463	20.0	20.9	20.4
20	51	195	1994	16.4	17.2	16.8
16	40	186	1564	13.2	13.9	13.6