
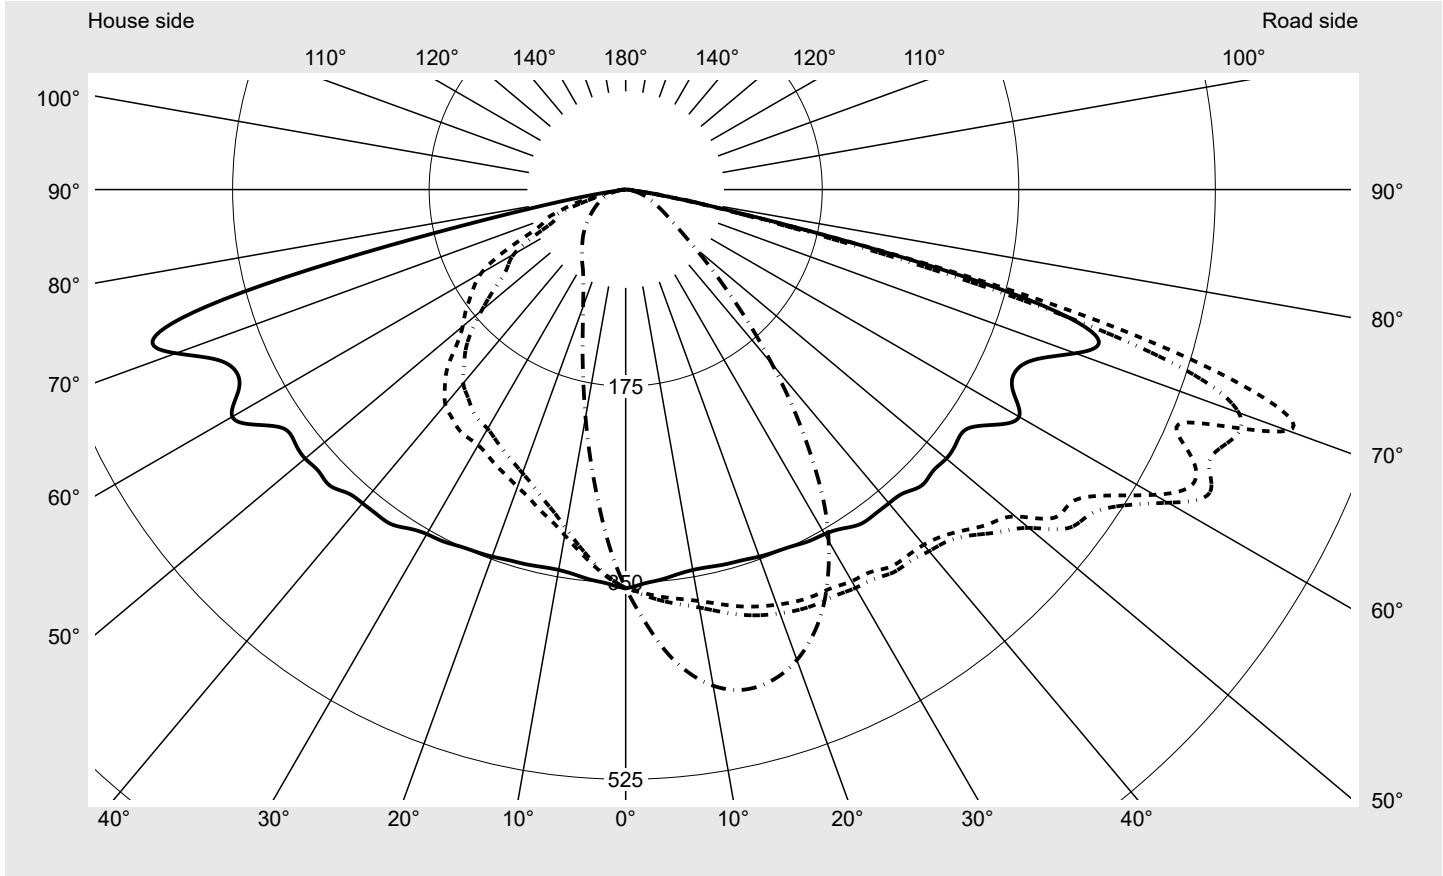


Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3B51E08LE EAN: 4058352584057	LP number 59338_124
	Version post-top or side-entry mounting Optic asymmetric, extremely wide distribution (ST0.5a) Cover transparent, PMMA Lamps LED 3000 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 9120 lm Power consumption = 60.4 W Luminous efficacy = 151 lm/W	serial documentation 17.08.2022



Luminous intensity in cd/klm C180-0 C192.5-12.5 C195-15 C270-90 **Imax: 627 cd/klm**



Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G3
Imax 70°	627.5
Imax 80°	70.6
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3B51E08LE EAN: 4058352584057	LP number 59338_124
--	--	-------------------------------

Envelope curve in cd/klm **KMK 70°** **KMK 67.5°** **KMK 65°** **KMK 62.5°** **siteco**

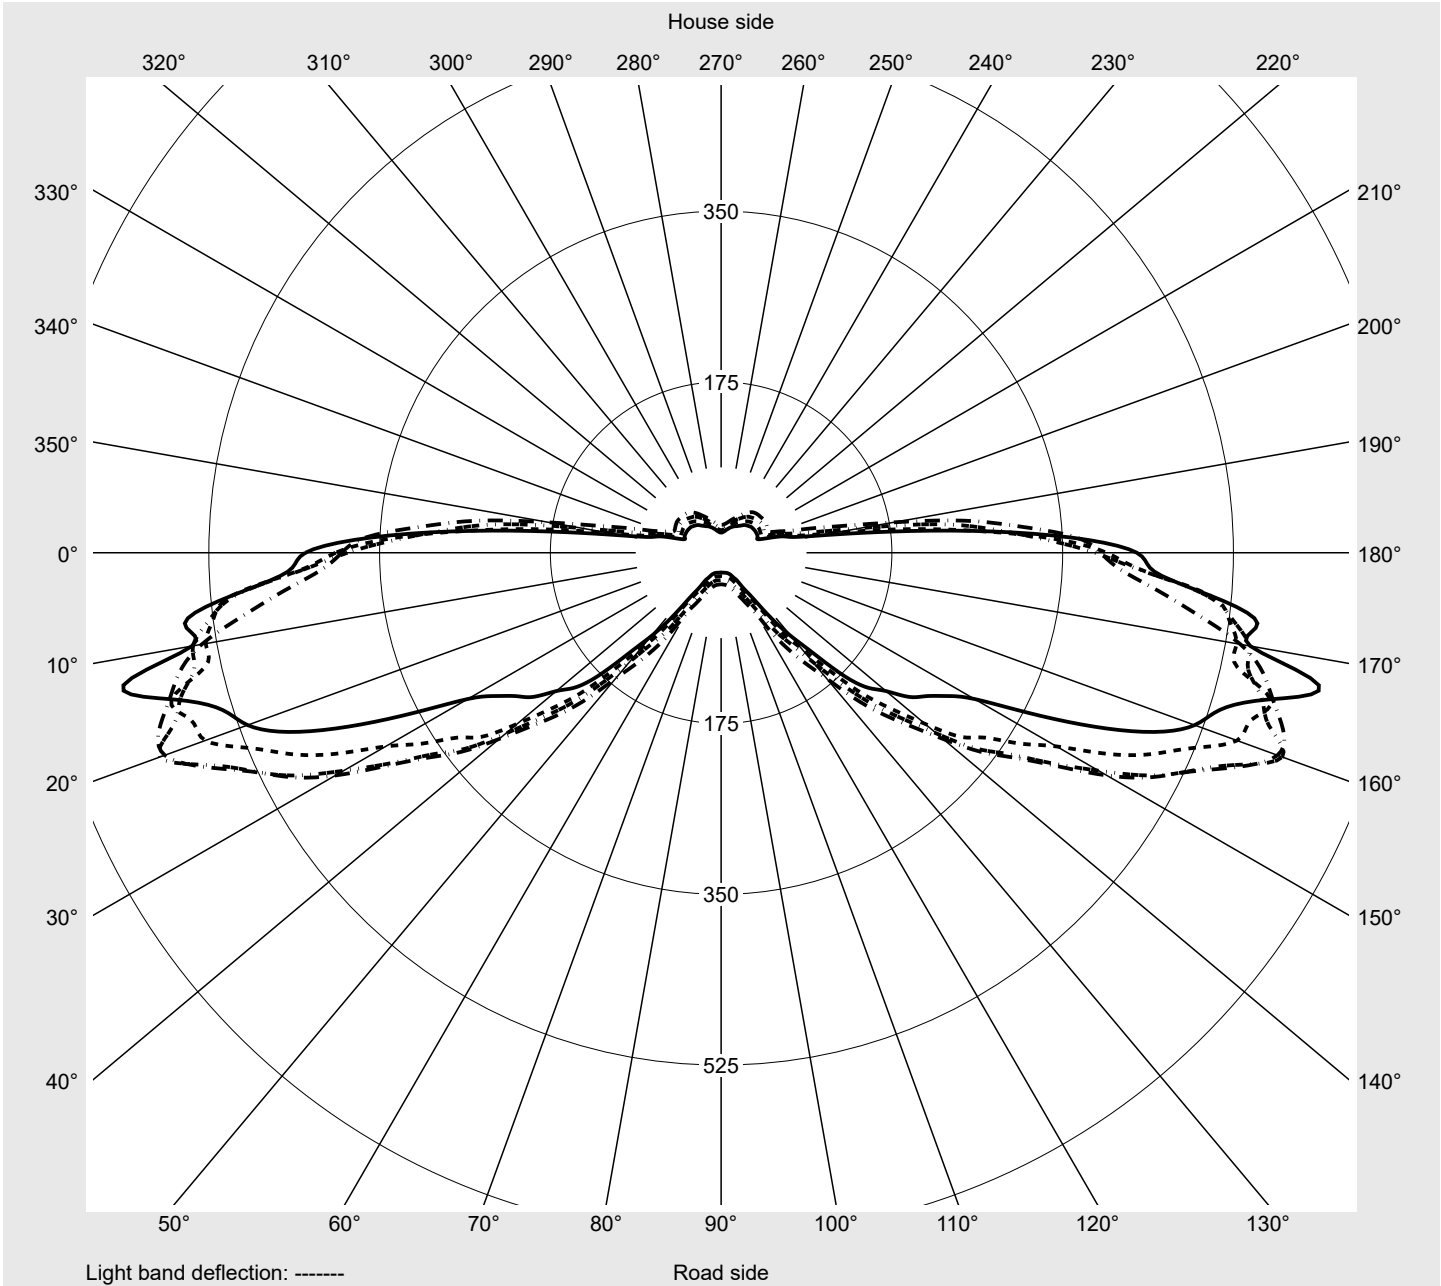

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3B51E08LE EAN: 4058352584057	LP number 59338_124
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6
2,5°	351.4	352.5	353.9	355.6	357.6	359.5	361.3	363.0	364.7	366.2	367.7	369.0	370.2	371.3	372.1
5,0°	348.9	351.4	354.1	356.9	360.4	363.9	367.4	370.5	373.3	376.1	378.9	381.4	383.7	386.0	388.2
7,5°	345.8	349.9	353.9	358.1	362.8	367.6	372.5	376.7	380.9	384.7	388.3	391.8	394.9	398.1	401.0
10,0°	343.9	349.5	354.8	360.2	366.0	371.9	377.8	383.3	388.2	392.8	397.0	400.9	404.6	408.4	411.6
12,5°	344.1	351.1	357.8	364.1	370.8	377.7	384.7	390.7	396.2	401.1	405.6	409.8	413.7	417.5	420.9
15,0°	345.2	354.0	361.7	368.8	376.4	384.0	391.8	398.4	404.4	409.7	414.4	418.6	422.4	426.1	429.4
17,5°	346.0	355.9	364.6	372.8	380.9	389.2	397.4	404.5	411.2	416.8	421.8	426.0	430.1	433.7	436.8
20,0°	347.7	358.7	368.2	376.5	385.1	393.3	401.5	409.0	415.8	421.3	426.1	430.2	433.9	437.4	440.2
22,5°	348.9	361.4	371.2	380.1	388.6	396.9	404.8	412.0	418.8	424.3	428.6	432.1	435.0	437.6	439.8
25,0°	350.4	363.3	373.7	382.5	390.9	398.7	406.5	413.3	419.5	424.4	428.6	431.9	434.0	436.1	437.7
27,5°	352.9	365.9	376.2	384.4	392.1	399.5	407.0	413.8	419.9	424.9	428.2	430.6	432.0	432.8	432.9
30,0°	354.2	367.9	378.8	387.7	395.7	402.6	409.5	415.3	420.2	423.9	426.8	428.7	429.5	429.0	427.5
32,5°	358.0	371.5	382.4	390.4	397.6	404.1	411.0	417.3	422.7	425.9	427.3	427.3	425.9	423.9	421.1
35,0°	363.7	377.0	387.3	395.7	403.4	410.2	415.9	419.9	422.5	425.1	426.9	427.3	425.5	420.1	413.9
37,5°	364.3	377.7	389.3	398.9	406.3	411.4	416.7	422.4	427.3	429.7	428.0	423.2	419.2	416.0	409.9
40,0°	364.6	378.1	389.8	399.3	406.4	412.9	420.3	425.6	426.9	424.4	422.6	422.1	420.2	411.6	398.9
42,5°	366.5	379.9	392.5	403.5	411.2	418.3	424.5	427.4	427.0	426.9	425.5	419.9	411.2	402.8	395.4
45,0°	372.6	385.7	398.3	410.3	420.6	428.5	435.3	438.7	439.0	436.5	431.8	423.9	412.3	400.5	384.3
47,5°	371.0	387.0	402.4	416.3	428.2	440.2	451.2	458.3	456.0	448.1	441.4	430.6	417.1	403.2	383.6
50,0°	372.6	387.9	404.4	420.9	436.1	452.8	468.6	473.6	471.1	465.5	456.1	442.1	421.8	402.4	379.2
52,5°	371.0	392.3	409.5	430.5	456.6	480.2	495.4	494.1	483.8	477.1	468.3	454.5	432.5	408.2	381.1
55,0°	371.3	393.3	411.6	428.4	456.6	484.9	504.4	511.3	506.2	496.1	482.6	462.3	434.6	408.8	385.8
57,5°	389.7	406.7	435.2	459.5	484.3	507.0	523.8	528.6	523.9	504.5	487.9	466.5	436.1	403.9	376.6
60,0°	404.5	420.8	453.9	486.2	524.6	543.5	557.6	571.4	566.2	534.5	502.7	479.6	451.2	407.2	372.6
62,5°	388.9	410.8	450.0	494.0	540.4	568.8	585.8	603.9	606.7	573.4	530.7	498.0	456.4	406.2	365.9
65,0°	383.0	433.0	499.0	529.1	549.6	553.2	573.4	588.6	612.0	568.5	529.6	494.3	446.7	401.4	359.8
67,5°	395.1	434.6	503.0	525.1	536.3	541.9	583.3	569.7	562.5	522.9	487.9	446.4	396.9	364.2	330.4
70,0°	426.1	444.5	503.1	554.4	550.7	627.5	580.9	535.8	516.4	479.9	421.6	355.7	299.7	273.3	256.2
72,5°	440.7	442.5	505.1	561.0	554.6	570.8	505.6	448.7	436.3	393.6	315.4	246.7	202.7	179.6	161.8
75,0°	353.4	353.2	367.5	449.0	400.5	388.9	318.4	282.4	270.2	255.8	213.4	173.4	150.4	138.4	122.7
77,5°	153.0	205.1	206.9	212.1	170.9	150.7	128.2	120.2	120.9	126.0	124.3	112.0	102.4	92.8	76.5
80,0°	50.0	70.6	61.8	49.7	44.1	45.7	58.2	61.5	58.1	51.4	54.3	52.5	46.8	41.2	34.1
82,5°	10.3	10.3	10.4	10.8	11.5	13.2	15.9	13.6	14.2	12.7	13.7	12.2	11.3	10.9	10.4
85,0°	6.2	6.3	6.4	6.4	6.4	6.4	6.4	6.3	6.2	6.0	5.9	5.7	5.5	5.4	5.2
87,5°	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.1	3.1	3.0	2.9	2.8	2.8	2.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3B51E08LE EAN: 4058352584057	LP number 59338_124
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6
2,5°	373.1	374.3	375.4	376.3	377.2	378.1	379.2	380.1	380.9	381.5	382.2	382.5	382.8	382.9	383.1
5,0°	390.2	392.4	394.6	396.6	398.4	400.1	401.9	403.5	405.1	406.4	407.6	408.5	409.2	409.8	410.4
7,5°	404.0	406.9	409.7	412.2	414.6	416.9	419.1	421.3	423.2	424.9	426.4	427.7	428.8	429.8	430.6
10,0°	414.9	418.2	421.3	424.0	426.6	429.1	431.5	433.9	436.1	437.9	439.7	441.0	442.4	443.6	444.7
12,5°	424.3	427.4	430.5	433.3	435.8	438.1	440.3	442.4	444.3	446.0	447.5	448.9	450.3	451.4	452.5
15,0°	432.4	434.9	437.5	439.7	441.8	443.6	445.2	446.8	448.1	449.4	450.5	451.4	452.3	453.3	454.4
17,5°	439.5	441.5	443.0	444.1	445.2	446.1	446.6	447.3	448.0	448.5	449.2	449.5	450.0	450.5	451.1
20,0°	442.5	444.2	445.6	446.4	446.6	446.3	445.8	445.0	444.4	444.0	443.7	443.5	443.5	443.4	443.5
22,5°	441.4	442.5	443.3	443.5	443.4	442.7	441.4	439.7	437.6	435.5	433.9	432.7	431.7	431.0	430.4
25,0°	438.0	437.9	437.5	436.5	435.5	434.2	432.2	429.5	426.4	423.1	420.1	417.5	415.6	414.3	413.1
27,5°	432.0	430.3	428.5	426.4	423.9	421.2	418.0	414.1	409.6	404.9	400.8	397.1	394.1	391.8	390.3
30,0°	424.3	421.1	417.3	413.5	409.4	404.7	400.0	394.2	388.3	382.2	377.1	372.6	369.0	366.0	364.1
32,5°	416.4	411.0	405.2	399.1	392.4	385.5	378.5	371.0	363.7	356.4	349.8	343.8	339.5	336.4	333.7
35,0°	407.1	399.5	391.2	383.1	374.4	365.2	355.9	345.6	336.1	326.9	318.7	311.6	305.8	301.1	297.7
37,5°	398.9	387.2	377.6	368.5	357.6	345.6	333.3	320.6	309.2	297.8	288.0	279.8	272.8	266.4	261.4
40,0°	388.6	377.7	363.4	350.5	338.1	323.8	309.4	294.9	281.7	269.4	258.6	248.9	240.1	232.1	225.1
42,5°	379.2	360.5	347.3	333.0	315.9	301.4	286.9	272.2	257.8	244.2	231.8	220.1	209.5	200.4	192.6
45,0°	365.4	350.4	331.0	312.4	298.3	281.2	265.0	248.4	233.3	218.4	204.6	191.6	180.5	170.9	162.5
47,5°	362.9	340.3	318.3	301.3	276.8	261.3	243.9	225.2	209.7	194.5	180.2	167.1	155.9	146.2	137.3
50,0°	358.5	332.7	308.1	282.4	259.1	239.4	221.4	202.3	184.7	169.9	156.6	144.4	133.2	123.0	113.7
52,5°	352.1	321.5	295.1	264.4	238.8	217.9	199.1	178.1	159.4	147.4	136.2	124.6	113.4	103.0	93.8
55,0°	356.2	320.6	284.5	247.5	219.6	197.7	175.7	154.3	140.6	126.9	117.0	105.7	94.7	84.5	75.9
57,5°	347.0	311.5	276.9	244.0	214.2	192.1	163.1	139.5	125.2	111.5	98.1	87.0	76.7	67.7	60.7
60,0°	344.3	308.6	273.8	243.2	217.0	186.5	153.9	129.8	113.3	97.9	80.8	69.3	60.8	53.8	48.7
62,5°	334.9	296.8	262.4	233.7	202.4	168.2	143.9	121.9	98.3	72.4	61.5	53.8	47.9	43.2	39.6
65,0°	329.6	288.2	251.2	219.6	182.4	145.9	118.5	99.9	75.6	58.4	48.8	42.7	38.2	34.9	32.5
67,5°	310.0	272.8	237.0	203.4	161.9	127.5	103.9	68.6	52.6	43.6	38.1	34.0	30.6	28.2	26.6
70,0°	242.7	220.5	205.0	179.0	139.2	111.9	84.9	57.0	44.3	33.6	29.5	26.4	24.1	22.8	21.9
72,5°	159.0	155.2	154.1	140.7	110.4	96.1	59.4	43.8	33.2	25.7	21.4	19.6	18.8	18.2	17.8
75,0°	105.3	97.6	92.3	83.4	66.5	53.3	32.1	32.0	22.5	17.9	16.4	15.4	14.7	14.3	14.2
77,5°	63.0	57.1	49.0	45.4	40.8	27.8	21.4	19.6	14.2	13.3	12.6	12.0	11.5	11.1	10.9
80,0°	26.2	24.3	22.6	17.3	14.0	13.2	14.1	12.7	10.2	9.6	9.2	8.8	8.5	8.3	7.9
82,5°	9.1	8.7	8.5	7.7	7.5	7.3	7.0	6.8	6.6	6.4	6.2	6.0	5.8	5.7	5.4
85,0°	5.1	5.1	4.9	4.8	4.6	4.5	4.3	4.1	3.8	3.6	3.3	3.2	3.1	3.1	3.1
87,5°	2.6	2.6	2.6	2.5	2.4	2.4	2.3	2.1	2.0	1.9	1.7	1.6	1.5	1.4	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3B51E08LE EAN: 4058352584057	LP number 59338_124
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6
2,5°	383.3	383.7	383.9	384.1	384.4	384.6	384.6	350.3	349.1	348.2	347.1	346.3	345.3	344.5	343.4
5,0°	410.9	411.5	412.0	412.5	412.8	412.9	413.0	345.8	343.2	340.5	337.9	335.3	332.8	330.2	327.6
7,5°	431.5	432.2	432.9	433.5	433.8	434.1	434.2	341.3	336.8	332.3	327.9	323.8	319.6	315.5	311.4
10,0°	445.6	446.5	447.2	447.9	448.2	448.4	448.5	337.4	331.0	324.7	318.4	312.5	306.3	300.4	294.5
12,5°	453.6	454.4	455.1	455.7	456.0	456.3	456.4	335.6	327.3	319.0	310.7	302.7	294.3	286.4	278.5
15,0°	455.0	456.0	456.7	457.1	457.5	457.8	457.9	334.9	325.0	315.1	304.9	295.3	284.9	275.3	265.6
17,5°	451.8	452.6	453.0	453.5	453.8	454.1	454.2	334.1	322.2	310.6	298.8	287.4	275.8	264.6	253.7
20,0°	443.6	443.9	444.5	444.9	445.2	445.6	445.7	334.7	321.0	307.6	294.2	281.6	268.7	256.5	244.3
22,5°	430.4	430.2	430.5	431.0	431.5	431.9	432.2	334.3	319.4	304.8	289.9	276.2	262.3	249.2	235.9
25,0°	412.3	412.0	412.1	412.5	413.1	413.6	413.9	334.9	318.3	302.2	286.3	271.6	256.6	242.5	228.4
27,5°	389.1	388.4	388.2	388.5	389.1	389.7	389.7	335.8	318.1	300.0	282.3	266.5	251.0	235.8	220.2
30,0°	362.6	361.1	360.4	360.3	361.0	361.4	361.4	336.2	317.0	297.2	278.7	262.7	245.9	229.2	212.9
32,5°	331.4	329.3	327.8	327.2	327.3	327.6	327.5	339.9	318.9	297.4	278.0	261.8	243.4	224.7	206.7
35,0°	294.4	291.3	289.0	287.7	287.2	286.8	286.5	345.0	322.6	299.4	278.5	259.9	238.5	217.9	200.2
37,5°	257.2	253.2	250.0	247.8	246.4	245.4	244.8	344.9	321.1	295.9	274.5	255.0	231.6	210.9	194.7
40,0°	219.8	215.0	210.8	207.3	204.9	203.3	202.6	346.8	318.7	290.9	270.8	249.9	225.0	206.1	189.9
42,5°	186.1	180.1	174.7	170.2	167.0	165.0	164.3	344.6	311.6	282.4	262.5	238.4	213.1	196.7	175.7
45,0°	154.9	147.6	141.1	135.8	132.3	130.1	129.4	351.4	311.5	280.5	256.6	224.4	201.5	183.0	155.7
47,5°	128.9	120.9	114.0	108.3	104.6	102.5	101.8	346.0	301.3	268.4	238.5	203.9	185.9	156.3	131.4
50,0°	105.2	97.1	90.4	85.0	81.7	79.9	79.4	347.9	301.8	263.6	223.8	189.5	167.3	133.0	118.1
52,5°	85.4	77.8	72.0	67.7	65.4	64.0	63.6	341.1	290.7	250.0	209.8	180.0	149.3	122.3	106.1
55,0°	68.5	62.2	57.8	55.1	53.6	52.7	52.4	340.1	283.3	239.2	197.9	169.5	132.8	111.5	89.8
57,5°	54.8	50.5	47.5	45.8	44.9	44.2	44.1	358.4	294.5	241.3	192.4	159.8	123.7	100.2	78.5
60,0°	45.0	42.0	40.1	39.0	38.4	37.9	37.7	372.1	308.5	252.4	192.2	148.3	114.8	84.3	72.6
62,5°	37.1	35.2	33.9	33.2	32.8	32.5	32.4	363.9	307.8	251.7	179.4	126.8	96.8	75.1	64.4
65,0°	30.8	29.6	29.0	28.6	28.4	28.1	28.0	328.8	277.9	223.9	145.5	98.0	76.2	64.3	53.4
67,5°	25.7	25.1	24.7	24.4	24.2	24.0	23.9	338.6	259.4	184.3	115.3	80.8	67.7	56.0	47.4
70,0°	21.4	21.0	20.8	20.6	20.4	20.3	20.2	358.6	257.2	162.1	101.4	74.6	64.8	49.8	40.4
72,5°	17.4	17.2	17.1	16.9	16.7	16.6	16.6	335.2	240.6	184.7	112.8	59.2	46.1	34.5	33.5
75,0°	14.0	13.8	13.7	13.5	13.3	13.3	13.2	268.1	215.0	161.6	101.7	45.0	29.4	26.2	27.3
77,5°	10.7	10.5	10.3	10.2	9.9	9.8	9.6	138.3	134.3	95.9	50.4	21.9	19.1	19.8	21.0
80,0°	7.6	7.4	7.2	7.0	6.9	6.8	6.7	61.0	45.2	28.8	25.5	18.3	12.8	13.6	14.7
82,5°	5.1	4.9	4.7	4.6	4.5	4.4	4.3	10.1	9.2	8.6	8.2	7.8	7.8	8.1	8.4
85,0°	3.0	2.8	2.7	2.6	2.5	2.4	2.3	5.8	5.8	5.6	5.3	5.1	4.9	4.7	4.5
87,5°	1.2	1.2	1.2	1.1	1.0	0.9	0.9	3.2	3.1	3.0	2.9	2.8	2.7	2.7	2.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3B51E08LE EAN: 4058352584057	LP number 59338_124
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6
2,5°	342.5	341.5	340.5	339.1	337.4	335.7	334.2	333.3	332.3	331.4	330.5	329.4	328.5	327.5	326.8
5,0°	325.2	322.7	320.1	317.2	314.2	311.3	308.6	306.2	304.0	301.8	299.7	297.6	295.6	293.7	292.1
7,5°	307.3	303.1	299.0	294.8	290.5	286.4	282.4	278.9	275.6	272.4	269.2	266.2	263.4	260.7	258.3
10,0°	288.8	283.1	277.6	272.1	266.4	261.3	256.3	251.6	247.3	243.1	239.1	235.3	231.8	228.5	225.6
12,5°	270.9	263.5	256.3	249.3	242.5	236.1	230.1	224.6	219.5	214.6	210.0	205.8	201.9	198.1	194.8
15,0°	256.2	247.1	238.2	229.8	221.8	214.1	207.0	200.5	194.6	189.1	184.1	179.6	175.5	171.6	168.2
17,5°	242.8	232.1	222.1	212.4	203.1	194.9	186.7	179.3	172.6	166.6	161.1	156.3	152.1	148.3	145.1
20,0°	232.3	220.5	209.5	198.9	188.8	179.4	170.6	162.6	155.2	148.6	142.8	137.9	133.7	129.9	126.9
22,5°	223.1	210.7	198.7	187.2	176.5	166.6	157.2	148.6	140.6	133.7	127.8	122.8	118.7	115.2	112.5
25,0°	214.6	201.5	189.2	177.7	166.4	156.2	146.2	137.0	128.7	121.7	115.8	111.2	107.4	104.2	101.7
27,5°	205.6	192.2	179.7	168.0	156.2	145.4	135.3	126.5	118.5	111.7	106.2	101.9	98.6	95.9	93.6
30,0°	197.6	183.5	170.6	158.0	145.8	135.1	125.3	117.2	110.1	104.0	99.1	95.2	92.3	90.0	88.0
32,5°	190.9	175.8	161.1	147.6	135.5	125.3	116.7	109.3	102.9	97.5	93.3	90.1	87.6	85.4	83.6
35,0°	184.2	167.1	151.0	137.2	125.8	116.5	108.6	102.0	96.5	92.1	88.8	86.1	83.9	81.9	80.1
37,5°	178.0	158.9	141.7	128.8	117.5	108.5	101.3	96.0	92.0	88.6	86.0	83.7	81.7	79.6	77.7
40,0°	168.5	147.7	133.5	120.8	109.3	101.0	95.4	91.6	88.5	85.9	83.8	81.8	79.8	77.8	75.7
42,5°	151.9	136.6	124.1	109.6	99.9	94.9	91.3	88.4	86.1	84.2	82.4	80.6	78.5	76.2	73.9
45,0°	137.3	124.8	108.5	97.2	92.9	90.1	87.6	85.7	84.1	82.6	81.0	79.0	76.8	74.4	72.0
47,5°	120.4	105.9	94.1	90.1	87.6	85.5	83.9	82.8	81.9	80.6	79.1	77.1	75.1	72.4	69.7
50,0°	102.4	88.1	84.3	82.5	81.2	80.4	80.1	79.8	79.0	78.0	76.5	74.7	72.4	69.7	67.0
52,5°	86.3	80.5	77.4	76.1	75.5	75.5	75.7	75.9	75.7	74.9	73.2	71.5	69.3	66.8	64.0
55,0°	79.7	74.5	71.4	69.9	69.4	69.9	70.5	70.9	71.1	70.7	69.6	68.0	65.7	63.2	60.5
57,5°	71.0	65.7	62.1	62.4	63.4	64.7	65.3	65.7	65.8	65.4	64.9	63.9	62.0	59.6	56.8
60,0°	65.2	58.1	56.9	57.6	58.6	59.4	60.0	60.2	60.2	60.2	60.0	59.2	57.8	55.5	52.8
62,5°	55.7	53.1	53.3	54.1	54.7	55.3	55.3	55.0	54.6	54.4	54.1	53.4	52.4	50.5	48.3
65,0°	49.2	48.7	49.3	50.1	50.9	51.3	51.1	50.6	50.1	49.3	48.4	47.3	46.5	44.9	43.2
67,5°	44.8	45.1	45.3	45.8	46.1	46.2	46.0	45.7	45.0	44.1	43.0	42.0	40.5	38.9	37.7
70,0°	40.2	41.1	41.3	41.4	41.4	41.2	40.9	40.7	39.9	39.0	38.1	37.1	35.4	33.9	32.6
72,5°	34.5	36.1	36.6	36.6	36.5	36.4	36.0	35.3	34.8	34.4	33.6	32.2	30.8	29.4	28.3
75,0°	28.8	30.2	30.9	31.3	31.4	31.4	31.3	30.8	30.3	30.0	29.2	28.0	26.7	25.5	24.4
77,5°	22.6	23.8	24.8	25.3	25.5	25.8	26.0	25.8	25.6	25.8	25.0	24.0	22.8	21.7	20.6
80,0°	15.8	16.8	17.7	18.5	19.0	19.2	19.2	19.2	19.4	20.1	19.8	19.2	18.4	17.6	16.9
82,5°	8.9	9.3	9.8	10.6	11.3	11.8	12.0	12.1	12.1	12.5	13.0	13.0	12.9	12.7	12.5
85,0°	4.4	4.3	4.2	4.0	3.9	3.8	3.8	3.9	4.0	4.2	4.6	5.0	5.5	5.9	6.2
87,5°	2.6	2.4	2.3	2.3	2.2	2.1	2.0	2.0	1.9	1.9	1.8	1.7	1.5	1.4	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3B51E08LE EAN: 4058352584057	LP number 59338_124
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	0.5	0.5
2,5°	326.1	325.4	324.7	324.0	323.3	322.7	322.1	321.6	320.9	320.4	320.0	319.8	319.7	4.2	4.8
5,0°	290.4	289.0	287.5	286.3	285.1	284.0	283.0	282.1	281.2	280.5	279.9	279.6	279.4	8.3	13.1
7,5°	255.9	253.8	251.8	250.0	248.3	246.8	245.5	244.3	243.3	242.4	241.8	241.4	241.3	12.2	25.3
10,0°	222.7	220.1	217.7	215.5	213.5	211.8	210.3	209.0	207.9	207.0	206.4	206.1	205.9	15.9	41.3
12,5°	191.7	189.1	186.5	184.1	182.1	180.3	178.7	177.3	176.3	175.4	174.8	174.5	174.5	19.4	60.6
15,0°	165.0	162.3	159.8	157.6	155.6	153.8	152.3	151.1	150.1	149.3	148.8	148.5	148.4	22.6	83.3
17,5°	142.0	139.5	137.2	135.2	133.4	131.9	130.5	129.4	128.5	127.8	127.3	127.0	127.0	25.7	108.9
20,0°	124.1	121.9	119.9	118.1	116.6	115.3	114.1	113.1	112.4	111.8	111.3	111.0	110.9	28.5	137.4
22,5°	110.0	108.0	106.2	104.7	103.4	102.3	101.3	100.4	99.7	99.1	98.8	98.6	98.5	31.1	168.5
25,0°	99.6	97.9	96.3	94.9	93.7	92.7	91.8	91.1	90.5	89.9	89.6	89.4	89.3	33.4	201.9
27,5°	91.6	90.1	88.7	87.4	86.3	85.4	84.5	83.8	83.3	82.9	82.5	82.3	82.3	35.4	237.3
30,0°	86.2	84.6	83.2	81.9	80.9	80.0	79.3	78.6	78.0	77.6	77.3	77.1	77.1	37.0	274.3
32,5°	81.9	80.5	79.1	77.9	76.7	75.6	74.8	74.1	73.4	72.9	72.7	72.5	72.5	38.3	312.7
35,0°	78.4	76.8	75.4	74.1	72.9	71.7	70.7	69.7	69.0	68.4	68.1	67.9	67.8	39.3	352.0
37,5°	75.9	74.1	72.5	70.9	69.5	68.2	67.0	66.0	65.2	64.5	64.1	63.9	63.8	39.9	391.9
40,0°	73.5	71.5	69.7	67.9	66.2	64.7	63.3	62.2	61.4	60.7	60.2	60.0	59.8	40.2	432.1
42,5°	71.4	69.2	67.1	65.0	63.0	61.4	60.0	58.7	57.8	57.1	56.6	56.3	56.2	40.3	472.4
45,0°	69.3	66.9	64.3	62.0	59.8	58.0	56.4	55.0	54.1	53.3	52.8	52.4	52.3	40.4	512.8
47,5°	66.8	64.1	61.4	58.8	56.5	54.5	52.9	51.6	50.5	49.5	49.0	48.6	48.5	40.4	553.2
50,0°	64.0	61.2	58.2	55.7	53.2	51.1	49.3	47.8	46.6	45.7	45.0	44.7	44.6	40.4	593.6
52,5°	61.0	58.0	55.2	52.5	50.1	48.0	46.1	44.4	43.1	42.1	41.4	41.1	41.0	40.5	634.2
55,0°	57.7	54.8	51.9	49.3	46.9	44.9	42.9	41.3	40.0	38.9	38.2	37.8	37.7	40.5	674.7
57,5°	53.9	51.2	48.5	46.0	43.8	41.6	39.8	38.2	36.9	35.8	35.0	34.6	34.4	41.1	715.7
60,0°	49.9	47.3	44.9	42.7	40.5	38.5	36.7	35.1	33.8	32.7	32.0	31.6	31.4	42.3	758.0
62,5°	45.9	43.4	41.1	39.0	37.1	35.3	33.5	32.0	30.7	29.8	29.1	28.7	28.6	42.5	800.6
65,0°	41.1	39.3	37.6	35.6	33.7	32.2	30.6	29.2	28.1	27.0	26.4	26.0	26.0	41.7	842.2
67,5°	36.4	35.0	33.5	32.1	30.6	29.2	27.8	26.5	25.5	24.5	23.8	23.4	23.2	39.6	881.8
70,0°	31.4	30.7	29.7	28.6	27.5	26.2	25.0	23.9	22.8	21.9	21.2	20.8	20.7	37.3	919.1
72,5°	27.4	26.5	25.6	24.9	24.0	23.0	22.0	20.8	19.8	19.0	18.4	17.9	17.9	32.6	951.7
75,0°	23.4	22.5	21.6	20.8	20.2	19.4	18.5	17.6	16.7	15.9	15.3	14.9	14.7	24.1	975.8
77,5°	19.7	18.9	18.0	17.2	16.4	15.7	15.2	14.3	13.5	12.8	12.1	11.8	11.7	13.5	989.3
80,0°	16.1	15.3	14.5	13.7	13.0	12.3	11.5	10.8	10.0	9.4	8.8	8.4	8.3	6.3	995.6
82,5°	12.1	11.6	11.2	10.6	9.8	9.1	8.2	7.4	6.7	6.3	5.8	5.6	5.5	2.5	998.2
85,0°	6.4	6.4	6.4	6.3	6.0	5.4	4.8	4.2	3.7	3.3	2.9	2.0	2.5	1.3	999.4
87,5°	1.3	1.2	1.2	1.2	1.3	1.4	1.3	1.3	1.1	0.8	0.5	0.3	0.3	0.6	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3B51E08LE EAN: 4058352584057	LP number 59338_124
--	--	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	9120	60.4	62.5	61.4
95	241	252	8653	57.0	59.0	58.0
90	229	250	8222	54.0	55.9	55.0
85	216	248	7756	50.7	52.5	51.6
80	203	246	7289	47.5	49.2	48.4
75	190	243	6822	44.4	46.0	45.2
70	178	241	6391	41.6	43.0	42.3
65	165	238	5924	38.5	39.8	39.2
60	152	235	5458	35.4	36.6	36.0
55	140	232	5027	32.6	33.7	33.2
50	127	229	4560	29.6	30.7	30.2
45	114	225	4093	26.7	27.6	27.2
40	102	221	3662	24.1	24.8	24.5
35	89	216	3196	21.4	22.0	21.7
30	76	210	2729	18.6	19.2	18.9
25	63	203	2262	15.9	16.3	16.1
20	51	195	1831	13.4	13.7	13.6
15	38	184	1364	10.5	10.8	10.6
13	34	180	1221	9.4	9.7	9.6