
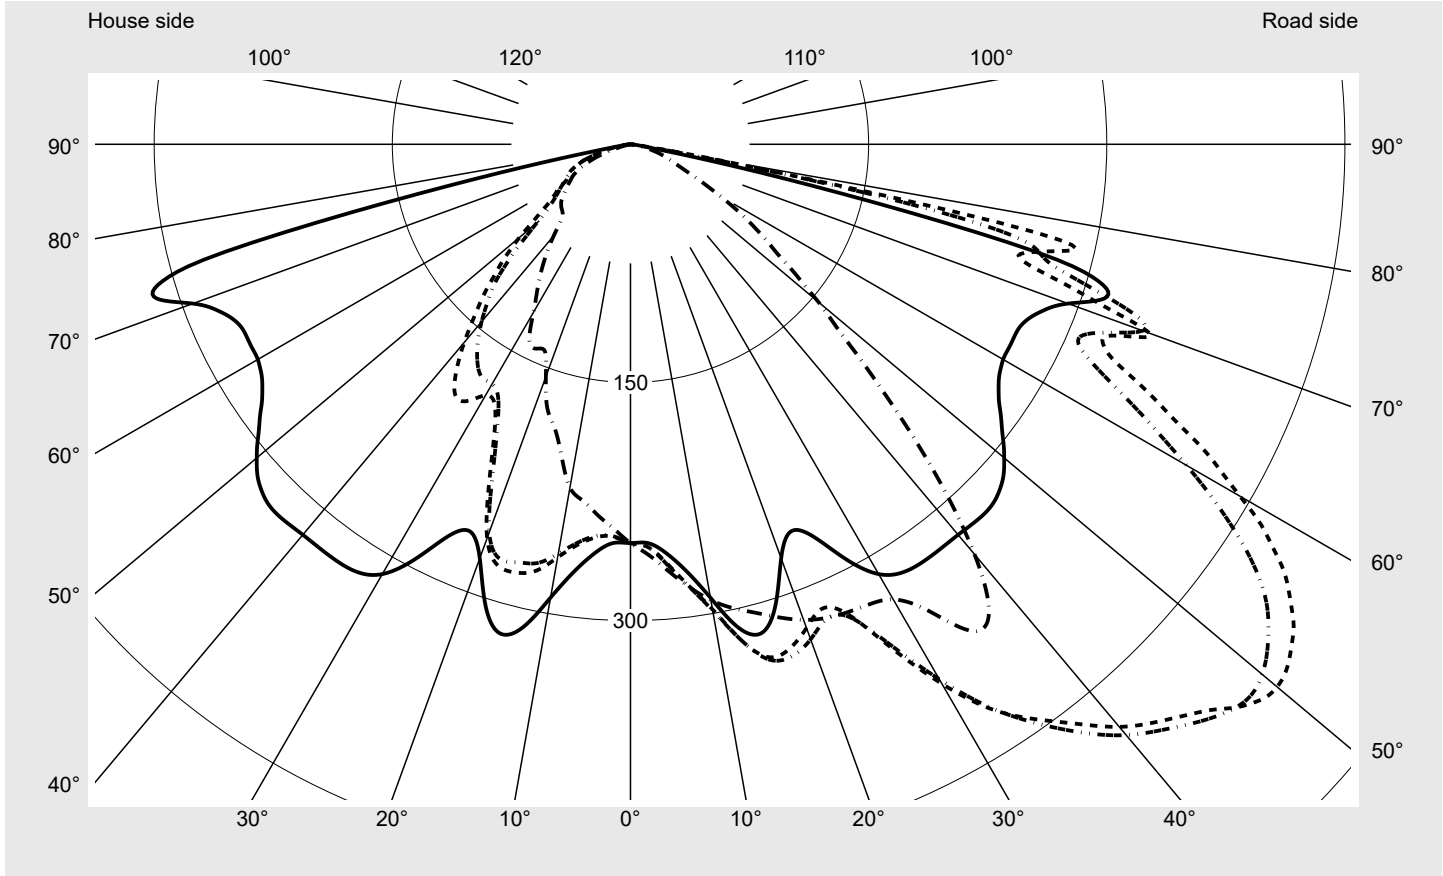


Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7B43A08NB EAN: 4058352730843	LP number 59074_133
	Version post-top or side-entry mounting Optic asymmetric, wide distribution (ST0.5a G) Cover toughened safety glass Lamps LED 4000 K CRI ≥ 70 Controlgear ECG DIM Rated values Net luminous flux = 23710 lm Power consumption = 151.2 W Luminous efficacy = 156.8 lm/W	serial documentation 23.08.2022



Luminous intensity in cd/klm C180-0 C210-30 C212,5-32,5 C270-90 **Imax: 532 cd/klm**



Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G4
Imax 70°	466.0
Imax 80°	84.5
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7B43A08NB EAN: 4058352730843	LP number 59074_133
---	--	-------------------------------

Envelope curve in cd/klm **KMK 50°** **KMK 49°** **KMK 48°** **KMK 47°** **siteco**

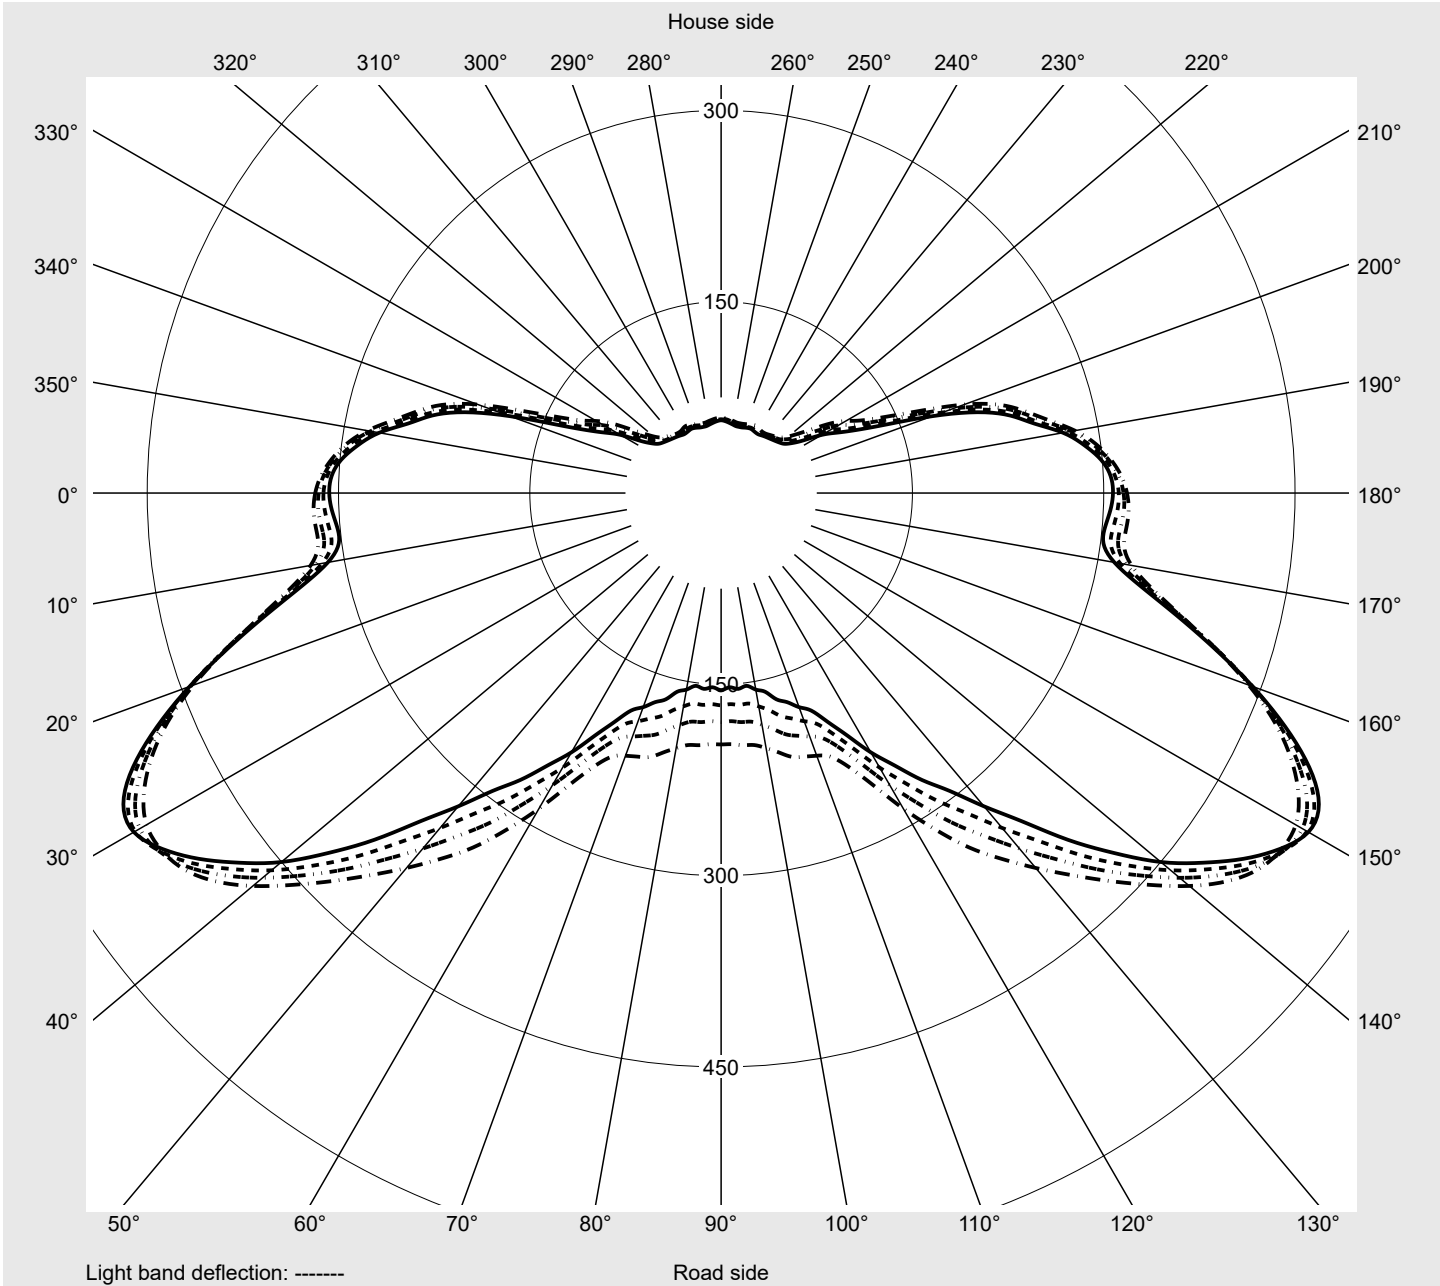

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7B43A08NB EAN: 4058352730843	LP number 59074_133
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2
2,5°	251.4	251.6	251.8	252.0	252.2	252.5	252.7	252.9	253.1	253.4	253.5	253.8	254.0	254.1	254.3
5,0°	258.5	259.1	259.9	260.7	261.4	261.9	262.2	262.4	262.9	263.3	263.8	264.5	265.1	265.8	266.0
7,5°	271.3	272.4	273.6	274.3	275.1	275.2	275.8	276.2	277.2	277.8	278.9	279.5	280.4	280.6	281.2
10,0°	290.0	291.7	292.5	293.3	293.3	293.7	293.8	294.8	295.2	296.2	296.6	297.4	297.4	298.3	298.3
12,5°	311.3	313.3	313.5	314.3	313.7	314.5	314.5	316.0	316.4	317.8	318.0	319.1	319.2	319.3	319.7
15,0°	318.8	319.0	318.7	318.1	317.6	318.1	319.4	321.2	323.3	325.6	328.2	331.2	334.4	335.9	338.6
17,5°	304.0	303.9	303.0	302.2	302.2	303.6	305.8	308.9	312.5	317.0	321.9	327.5	333.1	338.1	342.9
20,0°	277.5	279.5	278.2	279.7	280.3	283.9	286.4	291.6	295.9	303.0	309.1	317.6	324.2	331.8	337.5
22,5°	264.0	267.6	270.2	273.0	276.7	280.1	284.1	288.4	294.0	299.7	305.5	311.0	316.4	323.3	328.1
25,0°	272.6	278.4	284.8	289.0	294.6	297.4	303.0	307.0	314.1	318.1	323.3	324.9	327.7	329.1	329.6
27,5°	295.0	303.0	310.2	315.7	320.4	324.5	330.3	337.3	345.3	352.0	357.0	359.1	358.7	356.0	352.1
30,0°	312.6	321.6	329.3	334.8	339.7	345.3	353.5	363.4	374.5	384.0	390.8	393.4	392.3	389.1	384.2
32,5°	319.6	328.7	336.2	341.5	346.5	353.7	364.6	378.0	392.2	404.9	414.2	419.5	421.4	420.1	417.0
35,0°	321.1	329.9	336.8	341.5	346.4	355.1	368.4	384.8	401.8	417.0	428.5	436.4	441.7	445.0	445.9
37,5°	321.0	329.2	335.1	339.0	344.3	354.7	370.4	388.9	408.1	425.7	439.8	450.7	459.9	467.0	470.9
40,0°	321.1	328.1	332.6	335.4	341.2	353.8	371.8	392.6	413.9	433.7	451.2	466.8	479.0	485.8	489.2
42,5°	322.0	327.4	330.2	331.7	338.2	353.2	373.9	397.4	421.9	445.7	466.4	482.2	493.0	499.6	503.4
45,0°	321.7	325.2	325.9	326.2	333.4	350.6	374.7	402.9	432.6	459.9	481.2	496.2	506.0	512.5	514.5
46,0°	320.4	323.0	322.9	323.1	330.8	348.8	374.6	404.9	436.7	465.0	486.8	502.2	512.4	517.0	515.5
47,0°	318.3	319.8	318.9	318.7	326.8	346.0	374.0	406.7	440.3	469.9	493.1	510.3	520.3	520.6	514.2
48,0°	315.5	316.1	314.3	314.0	322.6	343.2	373.1	407.5	442.4	473.6	498.8	517.8	526.3	522.6	510.9
49,0°	311.8	311.1	308.7	308.2	317.7	339.8	371.5	407.1	443.4	476.8	504.5	524.3	530.6	522.1	506.0
50,0°	307.3	305.5	302.3	302.4	313.1	336.8	369.4	405.8	443.5	478.7	508.9	528.4	531.7	519.4	500.0
51,0°	302.6	299.8	296.4	297.2	309.2	334.1	367.1	403.9	442.8	480.1	511.8	530.6	530.3	515.2	493.5
52,0°	297.4	293.5	290.1	292.2	305.7	331.6	365.0	402.3	442.5	481.8	514.3	530.3	526.6	509.6	486.2
53,0°	292.7	288.2	284.9	288.3	303.2	330.1	363.8	401.8	443.4	483.8	515.5	527.9	521.7	503.1	477.1
54,0°	288.2	283.2	280.2	285.0	301.4	329.2	363.5	402.6	445.7	486.4	515.8	524.7	516.4	495.7	465.9
55,0°	283.4	278.2	275.8	282.2	300.2	329.3	364.6	405.4	449.7	489.9	514.5	518.9	508.3	485.8	451.7
56,0°	279.7	274.5	272.9	280.7	300.1	330.3	366.8	409.4	454.6	493.0	512.5	512.6	499.7	473.3	435.0
57,0°	276.5	271.6	271.0	280.2	300.9	332.6	370.0	415.0	460.3	495.6	510.2	504.8	489.8	458.4	417.8
58,0°	274.0	269.6	269.9	280.6	302.6	335.7	375.0	421.7	467.1	497.5	505.6	496.5	476.1	441.5	399.8
59,0°	272.3	268.4	269.7	281.8	305.1	339.6	380.6	429.2	473.6	498.4	500.6	486.7	462.3	423.6	381.6
60,0°	271.0	267.7	270.0	283.5	308.5	345.4	389.0	439.3	480.2	497.4	492.4	473.1	443.3	404.4	363.7
61,0°	270.6	267.5	270.6	285.5	312.1	351.4	397.6	448.8	485.1	494.7	483.7	459.2	425.6	385.0	346.3
62,0°	270.6	267.6	271.4	287.9	316.3	358.2	407.0	458.0	489.0	491.0	474.6	445.2	408.3	366.8	330.9
63,0°	270.5	267.9	273.2	291.1	321.6	366.4	418.0	467.2	490.5	484.2	462.0	427.4	386.7	348.6	316.4
64,0°	270.4	268.7	275.7	295.6	327.7	374.6	428.6	473.9	489.8	477.0	449.7	410.9	368.6	331.5	304.6
65,0°	271.0	270.8	279.3	302.0	335.3	384.9	439.6	479.8	487.1	467.0	436.2	391.2	350.1	317.6	297.1
66,0°	272.9	273.8	284.7	309.3	344.5	395.6	449.6	482.9	481.7	457.1	420.5	374.1	332.4	308.9	295.5
67,0°	275.8	277.6	290.5	317.8	353.5	405.6	457.2	482.8	475.7	446.4	406.8	361.1	323.7	308.7	303.1
68,0°	280.0	283.6	299.2	329.0	364.2	415.9	463.1	478.8	466.2	433.5	393.9	353.0	322.9	317.1	320.0
69,0°	285.2	290.3	309.4	341.5	376.0	425.6	465.8	471.9	453.2	418.4	384.3	356.2	337.9	331.0	338.2
70,0°	293.3	300.8	322.8	358.3	390.0	435.5	466.0	461.7	438.8	394.0	359.3	335.9	348.2	343.3	350.0
71,0°	304.7	313.5	340.2	376.2	407.0	443.9	462.4	451.1	422.5	374.2	327.5	302.7	319.0	340.6	352.8
72,0°	314.0	325.0	356.5	392.8	420.5	448.6	456.5	440.5	406.8	354.4	302.6	275.3	291.8	320.9	339.0

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7B43A08NB EAN: 4058352730843	LP number 59074_133
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2
2,5°	254.5	255.2	255.3	255.7	256.0	256.3	256.5	256.6	256.8	257.1	257.2	257.4	257.6	257.9	258.1
5,0°	266.8	266.8	267.7	267.7	268.1	268.3	268.3	269.0	268.7	269.2	269.1	269.1	269.6	269.3	269.8
7,5°	281.5	281.9	282.2	282.3	282.5	282.3	282.6	282.4	282.6	282.3	282.3	282.2	282.1	282.1	281.8
10,0°	299.0	299.0	299.4	299.2	299.3	299.1	298.9	298.6	297.9	297.4	296.6	296.2	295.4	295.0	294.2
12,5°	320.1	320.4	320.2	320.1	319.1	318.7	316.9	316.2	313.9	313.0	310.8	309.6	307.6	306.3	304.8
15,0°	340.5	342.3	342.5	342.7	341.0	339.6	336.2	333.6	329.9	327.1	324.0	321.5	318.9	316.6	314.3
17,5°	347.6	351.7	355.2	357.7	358.7	358.2	355.7	352.1	347.1	341.9	336.9	332.7	329.1	326.0	323.3
20,0°	344.0	349.0	354.3	358.3	362.0	364.4	365.8	365.4	362.8	358.1	352.0	345.7	340.3	336.0	332.6
22,5°	333.1	337.7	342.8	347.5	352.4	356.8	361.0	364.1	366.0	365.5	362.5	356.9	350.4	344.3	339.5
25,0°	329.4	330.1	331.6	334.3	338.1	342.8	348.1	353.2	358.0	362.0	364.1	363.2	359.0	352.4	345.9
27,5°	347.1	342.4	337.9	334.9	333.7	335.2	339.0	344.3	350.0	355.4	359.9	362.5	362.1	357.5	350.6
30,0°	377.6	370.2	362.4	355.6	350.3	346.8	345.3	346.0	348.8	352.7	356.7	360.3	362.3	360.7	355.3
32,5°	412.1	406.0	399.9	393.2	385.5	376.4	368.0	361.2	357.4	356.7	358.4	361.6	365.2	367.2	365.5
35,0°	445.2	443.0	439.0	431.9	422.2	410.4	397.9	385.7	375.9	369.9	368.9	371.8	377.7	383.7	387.2
37,5°	472.4	471.4	467.7	461.4	453.1	442.5	429.5	414.4	399.0	386.7	380.4	380.7	385.1	390.8	393.5
40,0°	490.9	490.6	487.8	482.0	472.7	459.3	442.4	423.2	402.3	384.3	371.8	367.6	367.3	369.0	367.2
42,5°	504.6	501.5	492.9	479.9	462.7	443.9	422.9	403.6	384.1	366.5	349.1	336.5	326.0	321.7	315.5
45,0°	509.3	495.9	476.2	454.4	432.2	412.0	393.9	376.2	354.9	330.8	303.3	280.0	264.2	258.0	254.7
46,0°	506.0	488.6	465.7	442.2	419.6	399.4	380.0	359.9	335.5	308.8	279.8	256.5	242.0	236.8	234.7
47,0°	500.0	479.3	454.7	430.1	406.2	383.7	361.6	339.3	312.9	285.7	258.2	237.0	223.7	219.2	216.7
48,0°	492.2	469.3	443.6	417.2	389.6	363.9	338.8	315.4	289.2	264.4	240.1	220.7	208.0	203.1	199.5
49,0°	484.2	460.2	432.1	402.5	370.7	342.8	316.4	294.0	270.2	248.6	226.6	208.7	195.9	190.4	185.4
50,0°	476.1	450.1	417.7	384.5	349.1	320.7	294.4	274.7	253.3	234.8	214.4	198.1	184.6	178.7	171.9
51,0°	467.8	437.8	401.4	364.5	328.5	299.9	276.0	257.4	239.3	222.4	204.3	188.2	175.0	167.5	160.2
52,0°	457.4	423.0	383.1	344.8	309.6	282.2	260.0	243.2	227.2	212.1	195.3	179.8	166.7	158.1	149.7
53,0°	443.8	405.3	363.8	325.7	291.9	265.9	245.7	230.6	216.0	202.5	187.0	172.3	159.0	149.4	140.7
54,0°	428.1	387.1	345.8	309.3	277.5	253.4	234.8	220.4	207.1	195.0	180.9	166.7	153.5	143.0	133.9
55,0°	410.0	368.3	328.4	294.2	265.3	243.1	225.4	211.9	199.8	188.7	175.6	161.9	148.8	138.0	128.2
56,0°	391.1	349.9	312.1	281.0	255.2	234.3	217.6	204.9	193.5	182.9	170.4	157.5	145.2	134.1	122.3
57,0°	373.4	333.9	298.4	271.2	247.6	228.4	212.3	199.8	188.0	177.6	165.5	153.2	138.6	125.2	112.7
58,0°	356.4	319.3	287.3	263.4	241.9	224.0	207.9	195.1	182.2	171.2	157.6	144.2	126.7	114.4	101.8
59,0°	340.7	306.5	278.8	257.3	238.1	220.4	204.2	190.2	175.6	161.9	146.1	131.3	116.0	104.2	93.4
60,0°	325.9	296.1	272.2	253.2	235.7	217.9	200.6	184.6	166.5	150.4	134.5	120.6	106.1	94.9	84.6
61,0°	312.5	287.5	267.4	250.8	234.2	215.9	196.6	177.2	155.5	138.2	122.5	108.9	95.1	84.8	75.4
62,0°	302.1	281.5	265.0	250.0	233.6	214.3	191.9	168.6	144.8	126.9	111.2	98.0	84.9	75.4	67.0
63,0°	293.6	277.8	264.6	250.2	233.1	211.9	185.6	158.6	133.4	115.1	99.6	86.9	74.9	66.3	59.0
64,0°	287.9	276.4	265.7	251.2	232.0	207.6	177.0	147.1	120.7	102.2	86.8	75.0	64.4	57.1	51.1
65,0°	286.2	278.1	268.2	252.3	229.3	200.7	166.8	135.7	108.3	90.0	74.9	64.5	55.2	49.5	44.7
66,0°	290.2	283.6	272.4	252.8	224.6	191.8	155.1	123.5	95.1	77.8	63.3	54.9	46.9	43.1	38.8
67,0°	303.0	294.6	277.9	251.9	218.0	181.4	143.6	110.6	82.9	66.0	54.1	46.7	40.6	37.4	34.6
68,0°	323.3	310.3	284.7	249.4	208.9	169.9	131.3	98.3	71.0	56.0	46.4	40.5	35.8	33.6	31.4
69,0°	341.6	325.4	290.9	245.8	198.9	157.2	118.2	85.5	59.7	47.2	40.0	35.7	32.1	30.5	28.7
70,0°	351.0	334.0	294.4	242.7	190.7	145.5	105.0	74.1	51.0	40.4	35.4	32.6	29.9	28.5	27.0
71,0°	353.1	334.3	293.7	239.1	183.2	133.0	91.3	63.9	43.1	35.1	31.9	30.2	28.2	27.2	25.7
72,0°	340.8	321.4	280.1	228.4	172.1	118.6	79.0	54.3	37.2	30.9	29.1	27.8	26.6	25.8	24.2

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7B43A08NB EAN: 4058352730843	LP number 59074_133
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2
2,5°	258.3	258.5	258.7	258.7	258.8	258.8	258.8	251.1	250.9	250.6	250.3	250.0	249.7	249.4	248.9
5,0°	269.8	269.6	270.1	269.6	269.8	270.0	269.5	258.0	257.4	256.9	256.1	255.3	254.3	253.5	252.5
7,5°	281.9	281.5	281.5	281.3	281.2	281.3	281.0	270.1	269.2	268.1	267.0	265.5	264.1	262.5	261.0
10,0°	293.6	292.9	292.4	292.1	291.8	291.7	291.5	288.5	286.7	285.2	283.2	281.4	278.9	276.7	274.1
12,5°	303.5	302.3	301.1	300.5	299.8	299.7	299.3	310.0	307.5	305.8	303.1	300.8	297.4	294.4	290.7
15,0°	312.2	310.3	308.6	307.3	306.3	305.8	305.5	318.1	317.0	315.8	314.3	312.5	309.9	306.7	302.7
17,5°	320.8	318.7	316.6	314.9	313.6	312.9	312.5	303.9	303.5	303.6	303.7	303.7	302.7	301.1	298.0
20,0°	329.5	326.9	324.3	322.1	320.3	319.2	318.7	277.4	274.6	275.3	273.9	276.0	274.8	276.0	271.7
22,5°	335.5	332.4	329.5	327.1	324.9	323.4	322.8	259.3	253.9	250.2	247.3	246.9	246.2	244.7	241.5
25,0°	340.5	336.3	332.8	329.9	327.4	325.7	325.0	263.5	254.7	246.2	239.8	235.5	230.5	225.4	223.6
27,5°	343.8	338.2	333.8	330.7	328.5	327.0	326.5	284.7	273.6	263.2	254.7	247.3	238.2	232.0	227.2
30,0°	348.2	341.9	337.0	334.0	332.2	331.4	331.0	301.9	290.7	280.5	272.3	262.9	254.7	248.5	238.0
32,5°	360.2	355.8	351.6	349.9	348.4	348.6	347.9	309.7	300.0	291.5	283.5	274.8	268.8	260.6	246.0
35,0°	385.1	381.9	377.7	375.5	374.1	374.5	374.1	312.0	303.8	297.0	288.8	281.7	275.4	263.4	249.1
37,5°	390.5	383.7	377.4	372.6	370.8	370.4	370.9	312.5	305.2	298.7	290.6	283.5	273.8	259.9	247.4
40,0°	362.2	352.4	345.4	339.0	337.3	335.9	337.1	313.2	306.3	298.9	290.6	281.8	268.4	254.3	243.0
42,5°	311.2	301.1	295.9	289.7	289.1	286.7	288.6	315.1	308.1	299.4	289.1	277.2	261.4	248.0	235.0
45,0°	252.5	246.7	242.1	237.9	236.9	235.4	235.5	316.0	308.4	298.9	285.9	270.6	254.2	239.7	220.5
46,0°	232.6	227.0	222.0	217.8	216.9	215.4	215.4	315.3	307.7	297.9	284.1	267.2	250.8	235.2	212.3
47,0°	214.1	208.2	203.1	199.3	198.5	197.1	197.1	313.9	306.4	296.1	281.7	263.4	247.1	229.7	202.8
48,0°	195.9	189.6	184.6	180.8	180.3	179.0	179.6	312.0	304.7	293.9	279.1	259.8	243.5	224.0	193.7
49,0°	181.0	174.4	169.8	166.5	166.7	165.7	166.4	309.1	302.3	291.0	276.0	255.8	239.3	217.5	184.7
50,0°	167.4	159.6	156.5	152.5	154.1	152.4	154.5	305.7	299.1	287.3	272.2	251.6	234.7	210.7	176.2
51,0°	153.5	146.0	142.0	139.4	140.5	140.4	140.9	301.9	295.3	283.0	268.0	247.0	229.5	203.9	168.4
52,0°	141.1	133.1	130.1	128.6	130.1	129.9	130.2	297.6	291.0	277.8	262.7	241.6	223.6	196.8	161.0
53,0°	130.9	122.6	119.8	118.1	119.2	118.6	118.5	293.3	286.5	272.0	255.9	235.2	217.1	190.0	154.2
54,0°	123.7	115.2	111.8	110.1	110.8	110.1	110.2	289.1	281.9	266.2	248.3	227.2	208.9	182.0	147.2
55,0°	118.0	109.8	105.9	103.8	104.2	103.2	103.2	284.5	277.0	260.5	241.3	219.3	199.2	172.0	139.0
56,0°	110.9	102.4	98.4	96.7	96.8	95.7	95.4	280.7	272.7	255.6	235.4	213.0	191.1	161.6	128.9
57,0°	102.6	95.2	91.9	90.2	90.1	88.6	88.5	277.2	268.6	250.5	229.7	206.7	183.9	152.1	118.2
58,0°	94.4	87.5	85.0	82.7	83.0	80.3	81.0	274.4	265.0	246.0	224.3	200.7	176.7	144.3	109.6
59,0°	86.1	79.9	77.1	75.6	75.1	72.8	73.0	272.3	261.9	241.7	219.4	195.0	169.8	136.9	102.7
60,0°	78.0	72.0	69.8	68.6	68.0	65.4	65.6	270.6	259.0	237.5	214.4	189.3	162.7	129.3	96.0
61,0°	69.3	63.9	62.0	61.1	60.2	57.8	58.0	269.8	257.2	234.3	210.2	184.0	156.4	122.6	89.9
62,0°	61.6	56.8	55.4	54.7	53.6	51.4	51.7	269.3	255.6	231.4	205.7	178.1	149.7	115.9	84.1
63,0°	54.4	50.5	49.5	48.9	47.5	45.9	45.9	268.5	253.0	227.3	198.8	168.6	139.9	107.9	78.4
64,0°	47.4	44.3	43.7	43.0	41.7	40.3	40.4	267.9	249.9	221.4	188.2	152.7	123.7	95.7	72.6
65,0°	41.9	39.5	39.2	38.4	37.5	36.1	36.2	268.2	247.1	214.7	175.8	132.6	102.0	78.9	64.7
66,0°	37.2	35.1	35.5	34.5	34.0	32.5	33.0	269.3	245.8	209.9	164.1	114.6	81.9	65.2	55.6
67,0°	33.3	32.3	32.4	31.8	30.8	29.9	30.0	271.6	246.3	206.5	154.8	100.7	68.8	55.9	48.4
68,0°	30.5	29.9	30.1	29.3	28.5	27.8	27.9	275.4	248.4	203.4	145.5	89.3	61.2	50.5	43.3
69,0°	28.2	27.7	27.6	26.7	26.1	25.6	25.7	281.3	252.5	201.3	137.0	80.0	57.0	47.2	40.0
70,0°	26.4	25.7	25.2	24.4	23.9	23.6	23.8	290.6	259.0	199.5	127.7	71.5	53.8	44.0	37.1
71,0°	24.8	23.6	23.0	22.1	21.8	21.3	21.7	302.4	269.3	198.6	117.5	65.4	51.1	41.1	34.1
72,0°	23.1	21.9	21.0	20.1	19.6	19.3	19.7	312.8	278.4	195.4	107.3	62.3	49.3	38.5	31.3

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7B43A08NB EAN: 4058352730843	LP number 59074_133
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2
2,5°	248.5	248.2	247.7	247.4	247.1	246.6	246.4	246.0	245.7	245.4	245.0	244.8	244.4	244.0	243.8
5,0°	251.7	250.7	249.4	248.5	247.6	246.7	245.8	245.0	244.1	243.3	242.5	241.7	240.8	240.1	239.3
7,5°	259.4	257.8	255.9	254.4	253.0	251.4	249.9	248.4	246.9	245.4	244.0	242.7	241.2	239.8	238.3
10,0°	272.0	269.3	267.0	264.2	261.8	259.2	256.8	254.2	251.0	247.7	244.3	241.3	238.7	236.2	234.2
12,5°	287.1	283.0	278.9	275.2	270.1	264.7	259.6	255.2	251.4	248.2	245.3	242.3	239.3	235.6	232.1
15,0°	298.1	292.7	286.2	279.2	272.6	267.4	262.6	258.4	253.5	247.2	240.8	233.4	227.0	220.2	214.8
17,5°	293.5	287.2	281.6	278.1	273.7	268.4	260.8	251.8	242.2	232.8	224.7	217.7	212.0	206.8	202.2
20,0°	269.2	265.6	265.8	264.0	260.1	252.8	245.2	237.0	229.9	222.7	216.0	210.0	205.0	200.1	195.3
22,5°	241.7	241.5	239.4	233.2	227.5	222.8	219.9	218.0	216.8	215.4	212.1	206.4	199.4	191.8	184.4
25,0°	223.2	218.5	211.6	203.3	198.8	195.8	195.4	196.9	198.4	198.3	196.6	193.2	187.7	180.6	173.1
27,5°	218.3	205.8	194.7	185.1	180.4	178.4	176.8	174.2	171.6	170.3	170.7	172.4	174.2	174.9	173.6
30,0°	222.5	207.0	193.8	182.6	174.2	164.6	155.1	147.8	144.0	144.6	149.1	156.6	165.0	171.4	173.4
32,5°	230.4	216.3	203.8	191.8	174.0	153.9	137.0	126.3	123.6	127.5	134.9	143.0	149.6	155.6	159.2
35,0°	236.2	224.9	211.8	192.5	168.0	146.3	129.8	118.7	112.9	112.0	115.0	120.7	126.5	130.5	132.9
37,5°	236.8	224.4	204.4	180.2	158.1	141.0	127.9	116.9	106.9	98.7	94.7	95.3	98.8	104.0	109.2
40,0°	231.1	211.2	184.8	162.9	145.9	134.1	122.9	109.8	96.3	86.5	79.0	75.7	76.6	82.7	88.8
42,5°	215.3	187.2	161.8	144.2	132.4	122.2	109.1	95.8	84.2	75.0	68.5	65.6	65.5	68.3	72.9
45,0°	190.7	161.2	139.6	127.0	117.5	104.6	91.1	80.0	71.4	66.1	63.2	61.5	60.6	60.8	62.5
46,0°	179.4	150.8	131.3	119.4	109.1	95.3	83.1	73.6	67.2	63.9	61.8	60.4	59.3	59.1	59.9
47,0°	168.1	140.9	123.2	113.0	101.5	87.5	76.6	69.0	64.5	62.3	60.7	59.5	58.4	57.9	58.1
48,0°	157.9	132.2	115.8	106.2	92.5	80.2	70.6	65.5	62.4	60.9	59.5	58.5	57.6	57.0	56.7
49,0°	148.6	124.2	108.9	98.4	84.2	73.3	66.3	62.8	60.9	59.6	58.5	57.5	56.7	56.1	55.5
50,0°	140.6	117.0	102.6	91.3	77.2	68.4	63.4	61.0	59.6	58.4	57.5	56.7	56.0	55.2	54.5
51,0°	133.3	110.2	96.0	82.8	70.5	64.3	60.9	59.3	58.0	57.1	56.3	55.7	54.9	54.2	53.5
52,0°	126.2	103.5	89.3	75.8	65.9	61.4	59.1	57.7	56.7	55.9	55.3	54.8	54.0	53.3	52.6
53,0°	119.8	97.1	82.9	70.2	62.7	59.4	57.5	56.4	55.5	54.8	54.2	53.6	53.0	52.5	51.8
54,0°	113.2	90.5	76.3	64.7	59.8	57.2	55.7	54.8	54.1	53.5	53.0	52.3	51.9	51.5	50.9
55,0°	106.1	84.2	70.2	61.1	57.6	55.5	54.3	53.4	52.7	52.2	51.7	51.2	50.9	50.6	50.1
56,0°	97.9	78.3	65.0	58.3	55.4	53.9	52.6	52.2	51.4	51.0	50.4	50.2	49.9	49.7	49.2
57,0°	87.7	71.8	60.7	55.9	53.6	52.1	51.1	50.6	50.0	49.6	49.2	49.0	48.8	48.8	48.4
58,0°	78.4	64.1	56.6	54.4	52.0	50.7	49.7	49.1	48.6	48.5	48.0	47.9	47.7	47.8	47.5
59,0°	71.7	57.4	51.9	51.6	50.3	49.2	48.2	47.4	46.9	47.0	47.0	46.7	46.6	46.8	46.7
60,0°	66.6	53.1	48.1	48.0	48.7	47.8	46.9	46.1	45.5	45.6	45.7	45.7	45.6	45.8	45.7
61,0°	62.6	50.4	45.9	46.0	47.4	46.7	45.7	44.9	44.3	44.4	44.5	44.7	44.5	44.8	44.7
62,0°	59.1	47.9	44.4	45.1	46.0	45.3	44.3	43.7	43.1	43.0	43.1	43.3	43.3	43.7	43.5
63,0°	55.9	45.7	43.1	44.4	44.7	44.0	43.2	42.6	42.0	41.9	42.0	42.2	42.3	42.5	42.5
64,0°	53.1	43.8	41.7	43.6	43.2	42.7	41.9	41.5	40.9	40.8	40.8	41.1	41.2	41.3	41.2
65,0°	49.9	42.0	40.4	42.3	41.9	41.3	40.7	40.5	40.0	39.8	39.7	40.2	40.3	40.0	40.1
66,0°	46.0	40.1	39.2	41.2	40.5	40.1	39.6	39.3	38.6	38.4	38.5	38.9	39.0	38.9	38.9
67,0°	41.6	38.0	37.9	39.4	38.8	38.4	38.0	37.9	37.3	37.0	36.9	37.4	37.5	37.4	37.3
68,0°	37.9	35.8	36.5	37.5	37.0	36.8	36.6	36.5	36.0	35.6	35.5	36.1	36.4	36.1	35.8
69,0°	35.2	33.6	34.8	35.6	35.1	35.1	34.8	35.0	34.6	34.1	33.8	34.7	34.9	34.1	33.8
70,0°	32.7	31.4	32.6	33.3	33.2	33.0	32.9	33.1	32.8	32.3	32.0	32.9	32.6	31.7	31.9
71,0°	29.9	29.1	30.1	30.9	30.9	31.0	30.9	31.0	30.7	30.4	30.3	30.9	29.9	29.4	29.6
72,0°	27.3	26.7	27.3	28.0	27.9	28.1	27.9	28.0	28.0	28.0	27.9	28.2	27.0	26.8	26.9

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7B43A08NB EAN: 4058352730843	LP number 59074_133
Table of values for luminous intensities		Maximum luminous intensity
		sitEco

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	0.4	0.4
2,5°	243.4	243.3	243.0	242.8	242.8	242.5	242.5	242.4	242.1	242.4	242.1	242.1	242.3	3.0	3.4
5,0°	238.6	237.9	237.3	236.7	236.3	235.9	235.5	235.4	235.1	234.9	234.7	234.6	234.6	6.1	9.5
7,5°	236.8	235.3	233.8	232.5	231.2	230.3	229.3	228.5	227.9	227.3	227.0	226.7	226.7	9.4	18.9
10,0°	232.2	230.4	228.8	227.3	225.9	224.6	223.4	222.3	221.4	220.6	220.2	219.6	219.6	13.0	31.9
12,5°	227.8	224.2	220.1	216.8	213.4	210.6	208.1	205.7	204.1	202.3	201.7	200.6	200.8	16.8	48.6
15,0°	209.6	205.5	201.8	198.6	195.9	193.5	191.4	189.4	187.8	186.4	185.6	184.8	184.8	20.3	68.9
17,5°	198.1	194.4	191.2	188.2	185.6	183.4	181.3	179.2	177.5	175.9	175.0	174.2	174.2	23.4	92.3
20,0°	190.5	185.8	181.2	176.6	172.6	168.7	165.7	162.6	160.3	157.9	156.9	155.5	155.8	25.7	118.0
22,5°	177.4	170.9	165.2	160.0	155.7	151.9	149.1	146.6	144.7	142.8	141.8	141.0	141.0	27.6	145.6
25,0°	166.7	161.7	158.0	155.0	152.6	150.4	148.5	146.8	145.3	144.0	142.8	142.1	142.0	30.1	175.8
27,5°	170.6	166.5	162.1	157.8	153.9	150.5	147.4	144.7	142.6	140.7	139.1	138.1	137.9	33.4	209.2
30,0°	171.2	166.2	160.0	153.7	148.2	142.8	137.9	132.9	129.2	125.8	123.8	122.1	122.1	37.0	246.2
32,5°	159.3	154.0	146.2	137.1	130.5	124.6	120.6	116.8	114.3	111.8	110.6	109.2	109.4	40.6	286.8
35,0°	134.1	133.4	129.8	123.6	117.5	112.4	108.5	105.3	102.6	100.6	99.2	98.3	98.2	44.2	330.9
37,5°	113.3	115.3	114.5	110.5	105.4	100.4	96.7	93.4	91.0	89.0	87.8	86.8	86.8	47.1	378.0
40,0°	94.4	96.6	97.6	94.4	90.9	85.9	83.0	79.7	78.3	76.2	75.9	74.7	75.2	48.5	426.5
42,5°	77.4	79.8	79.8	77.7	74.6	71.2	68.7	66.9	65.9	65.0	64.6	64.4	64.5	48.6	475.1
45,0°	65.0	66.5	66.1	64.0	61.6	59.9	59.1	58.9	59.3	59.6	60.0	60.3	60.5	33.2	508.4
46,0°	61.4	62.3	61.8	60.0	58.7	58.0	57.7	57.7	58.2	58.7	59.2	59.6	59.8	18.9	527.3
47,0°	59.0	59.5	58.9	58.1	57.5	56.9	56.6	56.6	57.2	57.8	58.5	59.0	59.3	18.7	546.0
48,0°	57.2	57.3	57.3	56.9	56.4	55.7	55.6	55.6	56.3	56.9	57.7	58.2	58.7	18.5	564.5
49,0°	55.7	56.0	56.3	55.9	55.3	54.8	54.7	54.7	55.3	56.0	56.9	57.5	57.9	18.2	582.7
50,0°	54.5	55.0	55.5	55.2	54.6	53.9	53.7	53.7	54.4	55.1	55.9	56.6	57.0	18.0	600.7
51,0°	53.4	53.8	54.5	54.5	53.9	53.0	52.7	52.7	53.2	54.0	54.8	55.5	55.8	17.7	618.4
52,0°	52.5	52.7	53.3	53.8	53.3	52.4	51.8	51.6	52.0	52.7	53.4	54.1	54.4	17.5	635.9
53,0°	51.5	51.7	52.1	52.5	52.6	51.7	50.9	50.5	50.7	51.2	52.0	52.6	52.9	17.2	653.1
54,0°	50.5	50.5	51.0	51.0	51.1	50.8	50.1	49.5	49.4	49.8	50.5	51.0	51.3	17.0	670.1
55,0°	49.6	49.5	50.0	50.0	49.9	49.6	49.4	48.9	48.3	48.4	49.1	49.6	49.9	16.8	686.8
56,0°	48.8	48.5	48.9	48.9	48.6	48.1	48.3	47.8	47.3	47.0	47.8	48.1	48.5	16.5	703.4
57,0°	47.9	47.6	47.7	47.8	47.5	46.9	46.6	46.5	46.0	45.6	46.5	46.9	46.9	16.3	719.7
58,0°	47.0	46.5	46.5	46.6	46.6	45.9	45.3	44.9	44.5	44.3	45.2	45.7	45.5	16.1	735.8
59,0°	46.1	45.2	45.2	45.4	45.5	44.8	44.1	43.5	43.0	42.9	44.1	44.7	44.0	15.9	751.7
60,0°	45.1	44.1	44.1	44.2	44.3	43.8	43.2	42.4	41.8	42.0	43.7	43.9	42.9	15.6	767.3
61,0°	44.1	43.2	42.8	43.2	43.1	42.8	42.2	41.3	40.6	40.7	42.0	42.3	41.7	15.4	782.7
62,0°	43.0	42.2	41.7	41.8	42.0	41.5	41.1	40.3	39.3	39.0	39.9	40.2	40.1	15.2	797.9
63,0°	42.1	41.3	40.8	40.6	40.8	40.2	39.8	39.1	38.0	37.5	38.0	38.3	38.4	15.0	812.9
64,0°	41.1	40.4	39.9	39.5	39.6	38.7	38.3	37.4	36.7	35.6	36.2	36.2	36.7	14.7	827.5
65,0°	40.2	39.9	39.3	38.8	38.4	37.1	36.4	35.6	34.6	33.3	33.6	33.7	34.2	14.4	841.9
66,0°	39.5	39.2	38.9	38.4	36.8	34.7	34.0	33.0	32.0	31.0	31.1	31.2	31.9	14.1	856.1
67,0°	38.3	38.5	38.3	37.0	33.9	31.7	31.2	30.4	29.7	28.3	28.5	28.6	29.2	14.0	870.0
68,0°	36.5	37.3	37.8	34.5	31.1	28.9	28.7	27.6	27.1	25.5	25.8	25.7	26.3	13.9	883.9
69,0°	34.9	35.9	35.7	30.9	27.9	25.4	25.4	24.7	24.6	23.4	23.6	22.9	23.8	13.9	897.8
70,0°	33.0	34.2	32.2	27.4	24.6	22.9	22.4	22.2	22.3	21.5	21.0	20.3	20.8	13.8	911.6
71,0°	30.6	31.8	28.3	23.8	22.1	20.0	19.4	19.4	20.0	19.5	18.3	17.5	17.6	13.6	925.1
72,0°	28.0	27.2	24.1	20.1	18.6	17.2	16.4	16.3	17.3	16.1	15.3	14.7	15.0	13.2	938.3

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7B43A08NB EAN: 4058352730843	LP number 59074_133
---	--	--------------------------------------

siteco

Table of values for luminous intensities Maximum luminous intensity

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
73,0°	314.2	327.1	363.0	397.4	422.7	442.9	443.9	424.6	388.6	334.2	283.3	254.4	265.4	296.9	310.4
74,0°	302.3	315.4	351.4	383.4	407.0	421.3	422.6	404.3	368.4	319.2	278.5	252.6	254.3	276.8	278.8
75,0°	271.9	282.4	317.5	348.3	373.3	382.5	388.8	372.7	343.4	304.4	279.4	261.8	262.3	267.5	251.6
76,0°	203.4	205.7	235.6	259.9	289.7	298.9	320.0	312.0	301.5	279.0	270.4	271.0	278.1	258.7	216.4
77,0°	127.7	125.1	141.5	158.4	183.6	190.1	209.0	211.9	225.2	227.5	246.7	272.1	287.2	232.7	167.6
78,0°	69.4	62.5	74.1	81.0	106.1	107.6	125.5	119.8	140.1	148.2	182.4	203.3	237.4	175.8	116.2
79,0°	29.2	27.1	30.4	36.2	50.1	55.6	64.6	67.3	83.0	101.9	127.0	132.3	111.3	97.4	67.9
80,0°	12.8	12.6	14.0	17.5	21.8	23.3	28.0	29.0	41.4	56.8	84.5	75.6	49.9	39.4	30.6
81,0°	7.7	8.0	8.9	10.4	11.7	11.5	12.4	12.0	15.1	20.5	28.7	25.3	16.6	15.8	13.4
82,0°	5.8	6.0	6.6	7.2	7.9	7.5	7.7	7.8	8.6	10.6	14.3	13.0	9.1	8.3	8.1
83,0°	4.4	4.5	4.9	5.1	5.5	5.4	5.4	5.6	5.8	6.4	8.8	9.1	7.0	5.9	5.9
84,0°	3.1	3.1	3.3	3.3	3.5	3.5	3.6	3.6	3.8	3.9	4.6	4.7	4.4	4.2	4.3
85,0°	2.4	2.3	2.3	2.3	2.4	2.3	2.5	2.5	2.6	2.6	2.8	2.8	2.9	2.8	3.0
86,0°	1.8	1.8	1.8	1.7	1.8	1.7	1.8	1.6	1.7	1.6	1.8	1.8	1.9	1.8	2.0
87,0°	1.4	1.4	1.4	1.3	1.3	1.3	1.2	1.2	1.2	1.2	1.2	1.1	1.1	1.2	1.2
88,0°	1.1	1.1	1.1	1.0	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.8	0.8	0.8	0.8
89,0°	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.8	0.8	0.7	0.8	0.7	0.7	0.7	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7B43A08NB EAN: 4058352730843	LP number 59074_133
--	--	--------------------------------------

siteco

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
73,0°	308.3	289.8	248.1	201.6	148.8	101.1	66.6	46.0	32.7	28.1	26.8	25.7	25.0	24.3	22.6
74,0°	264.8	245.1	208.3	168.0	120.8	81.4	53.7	38.2	29.2	25.7	24.6	23.7	23.1	22.3	20.7
75,0°	221.4	197.5	168.0	137.9	96.7	64.3	42.4	32.1	26.6	23.9	22.7	22.1	21.1	20.4	18.8
76,0°	170.0	141.6	116.1	96.9	66.0	46.5	33.7	27.6	23.9	22.0	20.8	20.3	18.8	18.0	16.6
77,0°	115.1	88.3	66.5	54.7	37.9	29.4	24.9	23.6	21.5	19.9	18.7	18.0	16.1	15.0	13.9
78,0°	76.5	58.2	42.9	33.1	24.2	20.5	19.2	19.7	18.8	17.7	16.6	16.0	13.8	12.5	11.6
79,0°	51.1	41.7	30.0	23.4	18.1	15.9	14.7	15.6	15.2	15.4	14.3	13.4	11.4	10.3	9.3
80,0°	27.2	25.0	20.1	16.4	13.4	11.9	11.1	11.4	11.9	13.0	12.3	11.1	9.1	8.2	7.6
81,0°	11.7	12.0	11.9	11.4	9.8	9.0	8.5	8.7	9.5	10.7	10.3	9.2	7.2	6.5	6.0
82,0°	7.4	7.2	7.5	7.3	6.8	6.7	6.6	6.8	7.5	8.7	8.4	7.3	5.7	5.0	4.6
83,0°	5.7	5.7	5.8	5.1	4.8	4.9	4.8	5.2	5.6	6.5	6.1	5.3	4.3	3.8	3.5
84,0°	4.3	4.5	4.4	3.8	3.4	3.3	3.3	3.6	3.8	4.5	4.3	3.9	3.2	2.9	2.7
85,0°	3.1	3.3	3.2	2.8	2.4	2.3	2.2	2.2	2.3	2.8	2.6	2.5	2.1	2.1	1.9
86,0°	2.0	2.2	2.1	2.0	1.7	1.7	1.5	1.5	1.4	1.5	1.4	1.5	1.4	1.4	1.3
87,0°	1.2	1.4	1.3	1.3	1.1	1.1	1.0	1.0	0.9	1.0	0.9	1.0	0.9	0.9	0.9
88,0°	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.6	0.6	0.6	0.6	0.6	0.6	0.6
89,0°	0.6	0.6	0.6	0.6	0.6	0.5	0.5	0.5	0.5	0.5	0.4	0.4	0.5	0.4	0.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7B43A08NB EAN: 4058352730843	LP number 59074_133
		siteco

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
73,0°	21.3	20.0	19.0	18.2	17.6	17.4	17.7	313.3	276.8	182.6	96.1	62.4	48.6	36.4	28.9
74,0°	19.7	18.1	17.0	16.2	15.6	15.3	15.5	298.9	258.9	160.8	84.5	62.2	47.9	34.5	26.9
75,0°	18.1	16.5	15.3	14.4	13.8	13.6	13.6	264.0	223.5	129.7	69.4	55.9	45.5	31.7	24.5
76,0°	16.3	14.7	13.7	12.7	12.1	11.7	11.8	192.6	158.3	84.1	46.3	41.8	38.2	28.2	21.4
77,0°	14.0	12.6	11.8	10.9	10.4	9.8	9.9	119.2	94.7	47.7	27.5	30.6	30.2	25.2	18.9
78,0°	12.0	10.8	10.1	9.4	8.8	8.3	8.4	60.8	51.0	28.7	23.6	31.7	31.7	27.0	18.5
79,0°	9.9	8.8	8.6	7.8	7.4	6.8	6.9	26.2	24.1	20.1	24.0	34.5	38.1	31.6	19.5
80,0°	7.8	7.1	6.8	6.2	5.7	5.4	5.4	11.7	11.9	13.1	17.9	27.0	35.6	31.7	18.8
81,0°	6.3	5.7	5.4	4.9	4.6	4.3	4.3	7.2	7.1	7.6	9.6	14.8	24.3	24.2	14.8
82,0°	4.8	4.3	4.1	3.9	3.7	3.5	3.5	5.5	5.5	5.5	6.1	7.9	14.2	14.8	9.6
83,0°	3.5	3.2	3.1	3.1	2.9	2.8	2.8	4.2	4.2	4.2	4.5	4.9	6.9	7.1	5.4
84,0°	2.6	2.5	2.3	2.3	2.3	2.2	2.2	3.1	3.2	3.2	3.3	3.4	3.6	3.5	3.2
85,0°	1.9	1.7	1.7	1.6	1.6	1.5	1.6	2.3	2.4	2.4	2.5	2.4	2.4	2.3	2.3
86,0°	1.3	1.2	1.1	1.1	1.1	1.1	1.1	1.8	1.9	1.8	1.9	1.8	1.9	1.7	1.8
87,0°	0.9	0.8	0.8	0.7	0.7	0.7	0.8	1.4	1.5	1.4	1.5	1.5	1.4	1.4	1.4
88,0°	0.5	0.5	0.5	0.5	0.5	0.5	0.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
89,0°	0.4	0.4	0.4	0.3	0.3	0.3	0.4	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7B43A08NB EAN: 4058352730843	LP number 59074_133
		siteco

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
73,0°	24.9	24.3	24.5	25.3	25.5	25.7	25.5	25.6	25.6	25.7	25.5	25.3	24.2	24.2	24.3
74,0°	22.7	21.8	22.0	23.1	23.1	23.3	23.3	23.1	23.0	23.0	22.3	21.8	21.3	22.1	22.2
75,0°	20.1	19.3	19.5	20.0	20.1	20.7	20.5	20.1	19.5	19.2	18.5	18.6	18.7	19.6	20.1
76,0°	17.5	16.8	17.0	17.6	17.7	18.1	17.8	17.2	16.6	16.1	16.0	16.1	16.1	16.5	17.1
77,0°	15.2	14.8	14.8	15.1	14.9	15.8	14.9	14.7	13.6	13.6	13.1	13.4	12.7	13.5	13.5
78,0°	13.3	13.0	12.8	12.6	12.4	13.0	12.1	11.6	11.1	10.9	10.7	10.7	10.4	10.5	10.3
79,0°	12.2	11.5	11.0	10.5	10.6	10.6	9.8	9.6	9.0	8.8	8.6	8.6	8.3	8.5	8.1
80,0°	10.6	9.9	9.3	8.2	8.3	8.6	8.1	7.7	7.2	6.8	6.6	6.5	6.1	6.1	6.0
81,0°	8.5	8.0	7.5	6.6	6.6	6.8	6.6	6.2	5.6	5.3	5.0	4.8	4.6	4.6	4.5
82,0°	6.3	6.0	5.6	5.1	5.1	5.3	5.1	4.9	4.4	4.1	3.7	3.6	3.3	3.2	3.2
83,0°	4.4	4.3	4.0	3.8	3.7	3.8	3.8	3.5	3.1	2.9	2.7	2.6	2.4	2.4	2.2
84,0°	3.0	3.0	2.8	2.7	2.7	2.8	2.7	2.5	2.2	2.1	2.0	2.0	1.8	1.7	1.6
85,0°	2.2	2.2	2.0	2.0	1.8	1.9	1.7	1.8	1.5	1.5	1.3	1.3	1.2	1.1	0.9
86,0°	1.7	1.7	1.6	1.4	1.4	1.3	1.2	1.2	1.1	1.0	0.9	0.9	0.8	0.8	0.7
87,0°	1.4	1.3	1.3	1.2	1.2	1.1	1.1	1.0	0.9	0.9	0.8	0.7	0.7	0.7	0.6
88,0°	1.2	1.1	1.1	1.0	1.0	1.0	0.9	0.9	0.8	0.8	0.7	0.7	0.7	0.6	0.5
89,0°	1.0	1.0	1.0	0.9	0.9	0.9	0.8	0.8	0.8	0.7	0.7	0.7	0.6	0.6	0.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
73,0°	25.2	23.7	20.7	17.3	15.7	14.3	13.6	13.2	13.9	12.2	11.9	11.5	12.0	12.5	950.9
74,0°	22.7	20.6	17.8	14.9	13.0	11.5	11.0	10.5	10.8	9.4	9.0	8.5	8.6	11.7	962.5
75,0°	19.7	17.1	15.0	13.1	11.1	9.5	9.0	8.4	8.6	7.4	7.0	6.4	6.5	10.6	973.1
76,0°	16.2	14.3	12.8	11.1	9.6	8.0	7.3	6.7	6.5	5.6	5.1	4.7	4.8	8.7	981.9
77,0°	13.4	11.9	10.7	9.0	7.7	6.2	6.0	5.0	4.6	3.7	3.4	2.9	3.1	6.4	988.3
78,0°	10.5	9.9	8.8	7.2	5.7	4.7	4.3	3.6	3.1	2.4	2.0	1.7	1.7	4.4	992.7
79,0°	8.3	7.6	6.9	5.6	4.5	3.8	3.4	2.7	2.2	1.6	1.2	1.0	1.0	2.8	995.4
80,0°	6.2	5.6	5.3	4.3	3.5	2.9	2.4	1.9	1.6	1.1	0.8	0.7	0.7	1.7	997.1
81,0°	4.5	4.1	4.0	3.2	2.6	2.2	1.9	1.5	1.2	0.9	0.7	0.5	0.5	0.9	998.0
82,0°	3.2	3.0	3.0	2.4	2.0	1.6	1.4	1.1	0.9	0.6	0.5	0.5	0.5	0.6	998.6
83,0°	2.0	2.1	2.2	1.7	1.4	1.2	1.0	0.8	0.6	0.5	0.5	0.4	0.4	0.4	999.1
84,0°	1.5	1.6	1.5	1.1	1.0	0.8	0.7	0.6	0.5	0.4	0.4	0.3	0.3	0.3	999.4
85,0°	1.0	1.0	1.0	0.7	0.7	0.5	0.5	0.4	0.4	0.3	0.3	0.3	0.3	0.2	999.6
86,0°	0.6	0.6	0.5	0.5	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.1	999.7
87,0°	0.5	0.5	0.5	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.3	0.2	0.2	0.1	999.8
88,0°	0.5	0.5	0.4	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.3	0.2	0.2	0.1	999.9
89,0°	0.5	0.5	0.4	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.2	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7B43A08NB EAN: 4058352730843	LP number 59074_133
---	--	--------------------------------------

siteco

Dimming levels table environmental temperature: 25°C

Luminous flux %	Output ECG [%]	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	100	23710	151.2	156.8	154.0
95	94	22531	142.1	147.2	144.6
90	88	21314	133.1	137.9	135.5
85	82	20072	124.1	128.5	126.3
80	77	19007	116.5	120.7	118.6
75	71	17698	107.5	111.3	109.4
70	66	16589	100.2	103.6	101.9
65	61	15464	92.7	96.1	94.4
60	56	14317	85.4	88.4	86.9
55	51	13153	78.2	80.8	79.5
50	46	11966	70.9	73.3	72.1
45	41	10762	63.6	65.8	64.7
40	36	9532	56.4	58.2	57.3
35	31	8288	49.1	50.7	49.9
30	26	7023	41.9	43.3	42.6
25	22	5996	36.2	37.3	36.8
20	17	4700	29.1	30.0	29.6
15	13	3646	23.4	24.0	23.7
12	10	2850	19.2	19.7	19.4

Dimming levels table environmental temperature: 5°C

Luminous flux %	Output ECG [%]	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	100	24480	153.0	158.6	155.8
95	94	23224	143.8	148.9	146.4
90	88	21933	134.7	139.5	137.1
85	83	20842	127.1	131.6	129.4
80	77	19505	118.0	122.2	120.1
75	72	18365	110.4	114.3	112.4
70	67	17213	103.0	106.6	104.8
65	61	15812	94.0	97.3	95.6
60	56	14620	86.6	89.6	88.1
55	51	13418	79.3	81.9	80.6
50	46	12194	71.9	74.3	73.1
45	41	10953	64.5	66.7	65.6
40	36	9693	57.2	59.1	58.2
35	32	8676	51.3	53.0	52.2
30	27	7389	44.1	45.5	44.8
25	22	6082	36.8	37.9	37.3
21	18	5026	31.0	31.9	31.4
15	13	3691	23.8	24.4	24.1
12	10	2884	19.5	20.0	19.8

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7B43A08NB EAN: 4058352730843	LP number 59074_133
---	--	--------------------------------------

Dimming levels table	environmental temperature: 15°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Output ECG [%]	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	100	24120	152.1	157.7	154.9
95	94	22900	142.9	148.0	145.4
90	88	21645	133.8	138.7	136.2
85	83	20581	126.3	130.8	128.6
80	77	19274	117.2	121.4	119.3
75	72	18157	109.7	113.6	111.6
70	66	16799	100.8	104.3	102.6
65	61	15652	93.3	96.7	95.0
60	56	14481	86.0	88.9	87.4
55	51	13297	78.7	81.4	80.1
50	46	12090	71.3	73.8	72.6
45	41	10866	64.1	66.2	65.2
40	36	9620	56.8	58.6	57.7
35	31	8360	49.5	51.0	50.2
30	27	7339	43.7	45.1	44.4
25	22	6044	36.5	37.6	37.0
20	17	4734	29.3	30.2	29.8
15	13	3671	23.6	24.2	23.9
12	10	2869	19.4	19.9	19.6

Photometric test report

Family Streetlight 21 midi easy LED	Order number: 5XE7B43A08NB EAN: 4058352730843	LP number 59074_133
---	--	--------------------------------------

Luminousfluxs table	sITeco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
25.0	23710.0	151.2
5.0	24480.0	153.0
15.0	24120.0	152.1