
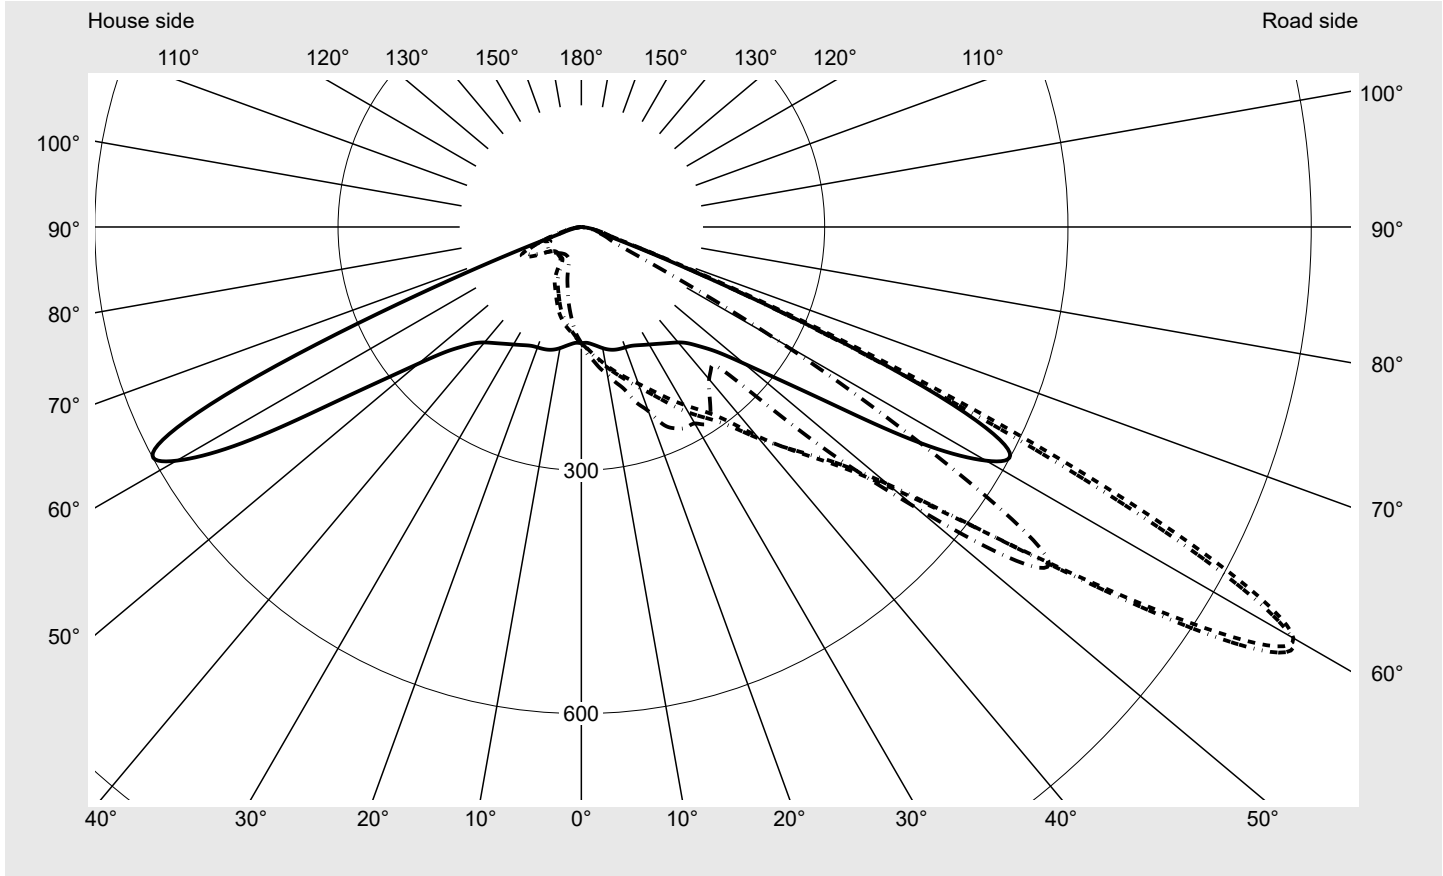


Photometric test report

Family Floodlight FL11 	Order number: 5XA779417A01BA EAN: 4058352607961	LP number 59255_50
	Version standard bracket Optic asymmetric distribution PL43 Cover toughened safety glass Lamps LED 5000 K CRI ≥ 70 Controlgear ECG Rated values Ta = 10 °C Net luminous flux = 104660 lm Power consumption = 757.5 W Luminous efficacy = 138.2 lm/W	serial documentation 14.03.2023



Luminous intensity in cd/klm C180-0 C215-35 C220-40 C270-90 **Imax: 1014 cd/klm**



Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G6
Imax 70°	89.4
Imax 80°	14.1
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL11	Order number: 5XA779417A01BA EAN: 4058352607961	LP number 59255_50
---	--	-------------------------------------

Envelope curve in cd/klm **KMK 60°** **KMK 57.5°** **KMK 55°** **KMK 52.5°** **siteco**

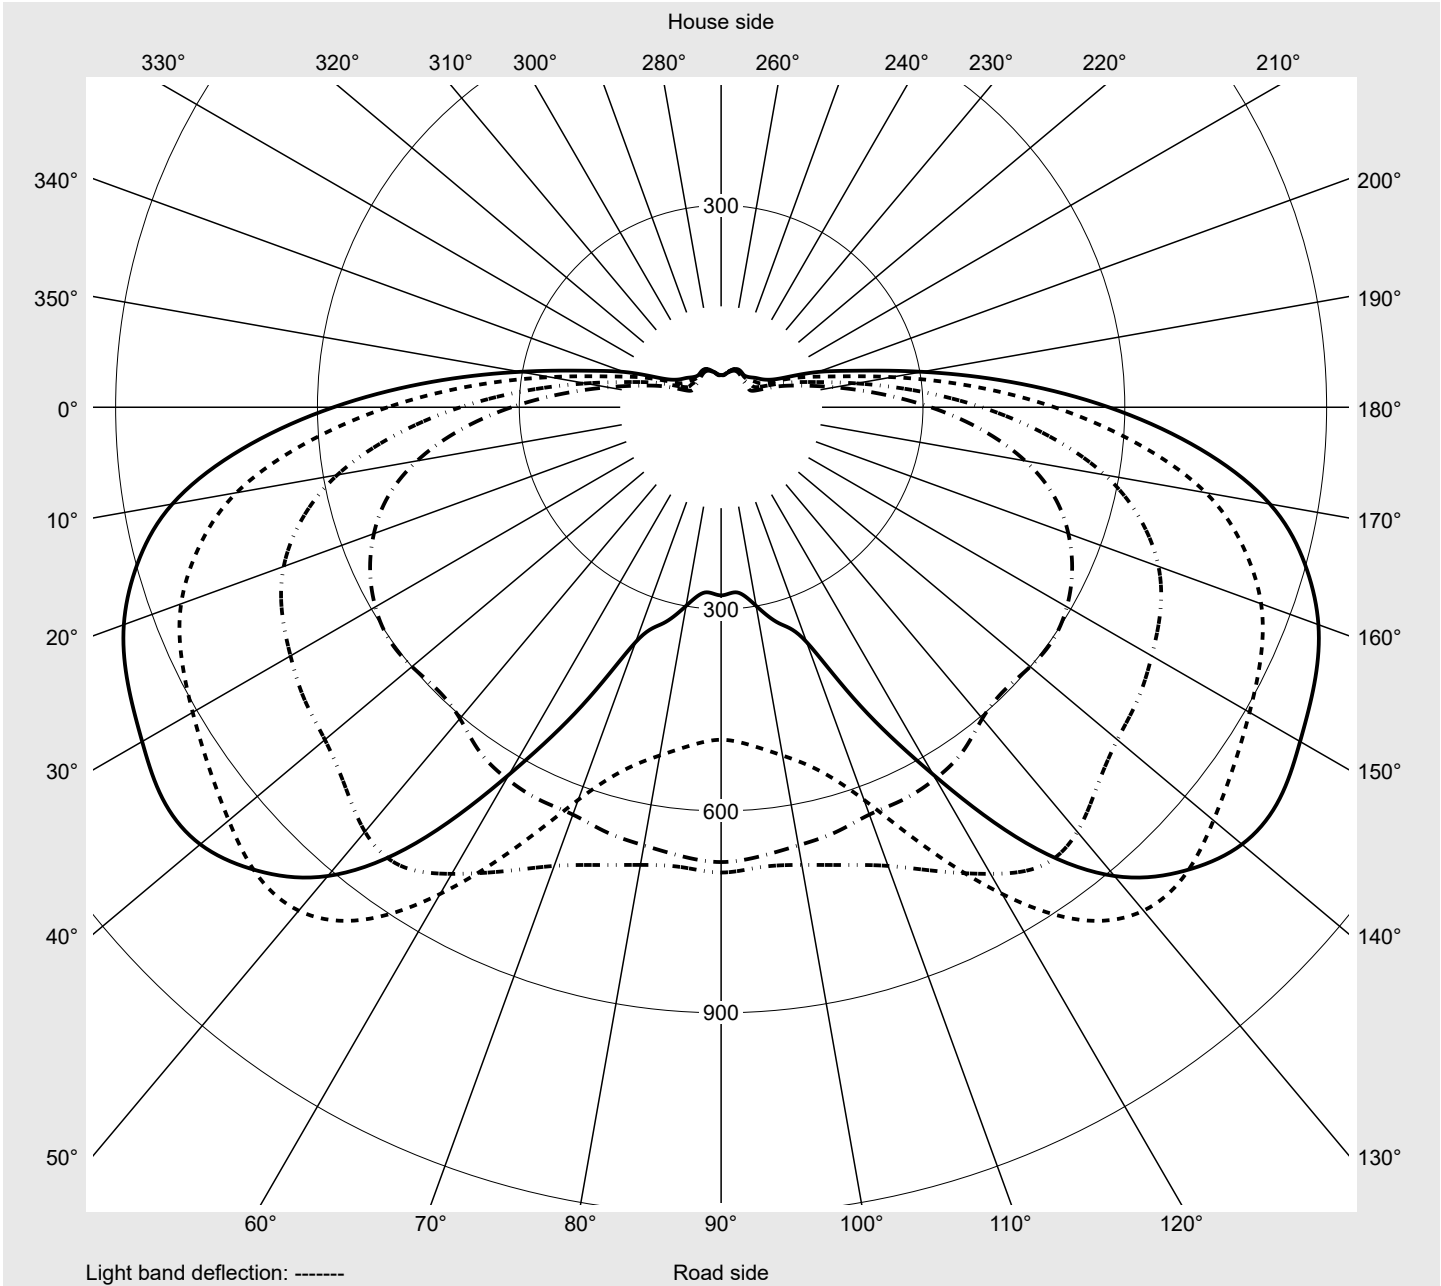

Photometric test report

Family Floodlight FL11	Order number: 5XA779417A01BA EAN: 4058352607961	LP number 59255_50
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1
2,5°	142.9	143.9	144.8	145.7	146.5	147.4	148.2	149.1	149.9	150.6	151.2	151.8	152.3
5,0°	144.9	146.9	148.7	150.4	152.0	153.6	155.1	156.5	157.9	159.1	160.2	161.1	162.0
7,5°	148.0	151.0	153.7	156.1	158.4	160.5	162.5	164.4	166.1	167.6	168.9	170.1	171.2
10,0°	151.7	155.4	158.9	162.0	165.0	167.6	170.2	172.4	174.4	176.2	177.7	179.0	180.2
12,5°	154.7	159.5	163.8	167.7	171.3	174.7	177.8	180.7	183.1	185.3	187.1	188.7	190.0
15,0°	156.7	162.6	167.7	172.5	177.0	181.1	185.0	188.6	191.7	194.7	197.0	199.0	200.6
17,5°	157.5	164.7	170.9	176.9	182.3	187.5	192.3	196.9	201.2	205.1	208.1	210.4	212.3
20,0°	158.0	166.4	174.1	181.2	187.6	193.7	199.7	205.6	210.9	215.7	219.5	222.6	224.9
22,5°	158.8	169.1	178.2	186.4	193.8	201.3	208.7	215.7	222.1	227.9	232.8	236.7	239.4
25,0°	161.0	172.9	183.6	192.8	201.4	210.3	219.0	227.2	235.0	242.1	248.4	252.9	255.5
27,5°	164.0	177.9	190.2	200.8	210.8	220.9	230.8	240.1	249.6	258.9	266.7	271.6	274.1
30,0°	167.3	183.6	197.7	210.1	221.6	233.0	243.2	253.1	264.0	275.8	285.7	290.4	291.6
32,5°	171.0	190.2	206.5	220.9	234.2	246.5	256.7	266.3	277.7	292.6	306.8	311.8	311.1
35,0°	175.3	198.1	217.4	234.2	248.9	261.9	272.5	282.1	292.5	310.1	329.7	338.3	329.2
37,5°	180.1	207.4	231.0	251.1	267.7	282.3	294.5	304.6	313.4	328.5	347.1	352.7	335.7
40,0°	185.8	218.1	247.2	272.7	294.1	312.4	326.8	335.8	340.4	346.8	349.1	341.7	324.5
42,5°	194.4	231.1	264.5	293.9	318.8	340.3	358.0	367.5	367.4	362.7	347.8	333.1	315.3
45,0°	208.8	252.0	289.7	323.2	350.1	372.9	391.8	400.4	396.3	381.6	359.9	338.1	317.3
47,5°	228.7	279.7	323.7	362.0	390.8	415.4	433.5	440.4	433.3	412.3	386.3	360.1	339.7
50,0°	262.1	323.3	377.5	421.9	451.7	478.4	495.9	502.0	493.9	473.6	454.2	442.5	447.2
52,5°	311.6	389.8	459.0	512.6	549.2	575.7	593.4	602.3	599.8	595.1	604.0	625.4	637.4
55,0°	387.6	488.7	579.3	645.4	691.8	720.2	739.1	756.3	768.8	792.2	823.6	831.7	800.8
57,5°	495.6	621.2	731.6	803.6	854.2	884.7	907.0	930.0	955.3	978.4	976.7	930.0	835.3
60,0°	576.2	715.2	828.3	898.1	944.8	972.9	993.7	1013.7	1010.7	974.2	909.5	790.8	630.4
62,5°	592.9	727.4	825.0	876.4	896.4	889.7	870.3	850.6	803.3	719.6	609.3	480.0	362.1
65,0°	464.2	556.2	615.7	640.1	640.1	611.8	577.6	540.6	475.6	401.1	332.2	269.0	199.4
67,5°	219.4	259.3	280.7	290.7	290.6	278.5	262.5	245.2	217.7	187.4	151.8	117.9	93.3
70,0°	69.1	77.8	79.1	84.1	88.4	89.4	88.9	87.7	83.0	72.0	67.0	63.6	59.1
72,5°	27.4	25.1	24.9	25.9	29.3	31.6	33.2	36.7	39.1	42.1	45.9	45.5	43.0
75,0°	19.3	22.1	21.1	21.6	22.4	23.6	24.8	28.2	29.4	29.9	30.9	31.4	32.0
77,5°	17.0	19.2	16.3	16.4	17.7	17.6	18.3	19.7	20.2	19.8	20.5	21.6	22.2
80,0°	13.2	12.3	11.3	11.3	11.9	12.5	12.2	12.9	13.5	13.7	13.5	13.6	14.1
82,5°	7.4	8.1	6.7	6.7	7.0	7.5	7.8	7.7	8.1	8.6	8.1	7.7	7.8
85,0°	3.4	3.7	3.4	3.4	3.5	3.7	3.8	3.7	3.5	3.3	3.2	3.0	2.8
87,5°	1.5	1.5	1.5	1.5	1.4	1.4	1.3	1.2	1.1	1.1	1.0	1.0	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779417A01BA EAN: 4058352607961	LP number 59255_50
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1
2,5°	152.8	153.2	153.5	153.9	154.0	155.9	142.1	141.2	140.4	139.5	138.6	138.0	137.3
5,0°	162.9	163.6	164.2	164.6	165.0	164.9	143.1	141.2	139.2	137.2	135.1	133.3	131.4
7,5°	172.2	173.1	173.8	174.4	174.8	175.5	145.2	142.2	139.1	135.9	132.6	129.5	126.4
10,0°	181.3	182.3	183.2	184.0	184.6	184.6	147.7	143.6	139.3	134.8	130.1	125.5	121.0
12,5°	191.2	192.4	193.5	194.6	195.5	196.3	149.6	144.3	138.6	132.8	126.6	120.6	114.6
15,0°	202.0	203.2	204.7	206.4	208.0	208.1	150.3	143.7	136.6	129.3	121.9	114.6	107.5
17,5°	213.9	215.4	217.2	219.9	223.2	227.2	149.8	141.6	133.0	124.4	115.7	107.2	99.0
20,0°	226.7	228.1	229.9	233.3	239.2	241.5	148.7	138.9	128.9	119.1	109.2	99.6	91.0
22,5°	240.9	241.5	242.5	246.0	255.1	263.4	147.8	136.4	124.7	113.4	102.6	92.6	83.7
25,0°	255.8	254.6	254.0	256.8	267.6	273.9	148.0	134.6	120.9	108.2	96.6	86.5	77.6
27,5°	273.1	269.4	266.6	268.3	277.4	279.1	148.7	133.0	117.5	103.7	91.7	81.3	69.7
30,0°	289.4	282.9	277.8	279.5	285.6	279.7	149.5	131.8	114.9	100.4	88.0	76.2	56.2
32,5°	305.9	292.4	283.0	283.6	289.7	287.9	150.6	130.6	112.8	97.9	85.2	66.0	47.8
35,0°	316.5	296.5	283.1	282.2	281.5	277.6	151.5	129.5	110.7	95.5	80.4	53.8	45.7
37,5°	316.2	292.2	277.5	272.6	263.8	259.3	152.7	128.4	108.8	93.3	68.2	47.4	44.9
40,0°	303.9	282.2	265.9	254.6	246.7	245.1	154.4	127.8	107.0	90.5	55.0	46.1	44.5
42,5°	295.7	274.4	258.9	245.8	239.0	236.8	158.1	128.3	105.5	85.4	50.5	45.7	44.2
45,0°	297.3	277.2	268.1	262.3	262.2	258.5	166.4	131.4	105.4	82.0	49.7	45.5	44.0
47,5°	333.3	335.8	347.5	361.9	374.5	398.4	179.8	138.4	107.5	81.1	49.8	45.3	44.1
50,0°	468.9	489.5	511.2	527.6	540.9	537.6	201.8	151.4	113.3	83.2	52.3	46.0	45.8
52,5°	642.9	644.3	654.3	661.3	669.9	676.0	234.9	171.2	124.2	90.9	60.5	50.1	49.4
55,0°	760.8	725.5	704.3	690.7	686.0	691.6	288.2	204.3	144.7	107.5	76.7	59.8	56.0
57,5°	722.1	621.0	558.4	525.6	504.2	494.2	369.5	257.9	177.1	131.0	94.6	71.6	64.6
60,0°	489.5	371.4	332.4	299.7	276.3	279.6	432.0	303.4	209.9	153.4	104.4	81.9	72.9
62,5°	282.9	220.3	166.1	126.6	104.6	96.1	449.0	316.9	223.7	160.1	112.9	89.4	79.4
65,0°	148.0	114.0	58.9	43.7	40.2	43.4	342.5	250.4	185.5	134.8	106.2	89.3	81.1
67,5°	77.2	65.3	45.2	41.1	38.0	35.0	129.5	94.9	102.2	86.6	76.6	72.0	70.8
70,0°	51.1	44.0	36.2	32.4	29.2	27.4	36.8	28.8	35.3	44.3	45.7	48.9	53.0
72,5°	39.9	35.0	29.9	26.7	24.1	21.3	23.1	22.1	22.7	27.5	28.7	31.7	36.5
75,0°	31.1	28.4	24.3	21.0	20.0	18.3	19.1	17.4	18.1	20.3	20.7	22.9	26.7
77,5°	22.1	20.1	17.8	16.1	15.3	13.4	17.5	14.7	13.9	14.9	14.9	16.3	18.5
80,0°	13.8	12.8	11.5	10.5	9.6	9.3	12.4	11.3	9.6	10.6	10.2	10.7	11.6
82,5°	7.4	6.9	6.4	5.8	5.4	5.2	6.8	10.0	6.2	6.9	6.3	6.1	6.5
85,0°	2.5	2.4	2.2	2.1	2.0	2.2	3.2	5.6	3.4	3.2	2.9	2.8	2.8
87,5°	0.9	0.9	0.8	0.8	0.8	0.8	1.5	1.7	1.5	1.4	1.4	1.3	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779417A01BA EAN: 4058352607961	LP number 59255_50
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1	0.2	0.2
2,5°	136.6	135.9	135.3	134.8	134.4	134.0	133.6	133.4	133.3	132.9	133.0	1.7	1.9
5,0°	129.6	128.0	126.3	125.0	123.7	122.5	121.5	120.8	120.2	119.7	119.6	3.4	5.4
7,5°	123.3	120.3	117.4	114.9	112.5	110.5	108.8	107.4	106.5	105.8	105.5	5.2	10.5
10,0°	116.5	112.2	108.2	104.6	101.4	98.6	96.3	94.5	93.1	92.2	91.8	6.9	17.4
12,5°	109.0	103.7	98.5	93.9	89.7	86.1	83.1	80.9	79.2	78.2	77.8	8.6	26.0
15,0°	100.6	94.1	88.2	83.0	78.6	74.9	71.8	69.4	67.8	66.8	66.4	10.3	36.3
17,5°	91.4	84.4	78.4	73.2	68.5	64.2	60.4	57.5	55.4	54.2	53.8	12.0	48.3
20,0°	83.4	76.3	69.2	61.4	54.6	49.9	47.0	45.4	44.3	43.8	43.6	13.7	62.1
22,5°	75.9	66.6	55.9	48.6	45.4	43.9	42.9	42.2	41.6	41.2	41.1	15.6	77.7
25,0°	67.6	55.0	47.3	44.6	43.4	42.5	41.6	41.0	40.5	40.1	40.1	17.6	95.3
27,5°	54.3	46.4	44.3	43.3	42.5	41.8	41.1	40.4	39.9	39.6	39.5	19.9	115.2
30,0°	46.4	44.5	43.5	42.8	42.2	41.5	40.7	40.1	39.6	39.3	39.2	22.2	137.4
32,5°	44.9	43.8	43.2	42.6	42.0	41.5	40.9	40.3	39.8	39.5	39.4	24.6	162.0
35,0°	44.2	43.5	42.9	42.6	42.4	42.1	41.7	41.2	40.6	40.2	40.0	27.1	189.1
37,5°	43.9	43.0	42.7	42.9	43.1	43.2	42.9	42.2	41.6	41.0	40.8	29.4	218.5
40,0°	43.4	42.8	42.9	43.6	44.2	44.5	44.4	43.9	43.1	42.4	42.1	31.6	250.0
42,5°	43.2	42.9	43.5	44.4	45.6	46.5	46.7	46.1	45.1	43.9	43.5	34.0	284.1
45,0°	43.3	43.7	44.5	46.0	47.7	49.2	49.6	48.7	47.2	45.6	45.0	37.6	321.7
47,5°	44.2	44.8	46.1	48.1	50.5	52.3	52.6	51.2	49.1	47.0	46.1	44.4	366.1
50,0°	46.5	47.2	48.6	50.8	53.4	55.3	55.6	53.6	50.8	48.1	47.2	56.3	422.5
52,5°	50.3	50.3	51.3	53.4	55.9	57.8	57.8	55.3	51.8	48.7	47.8	72.5	495.0
55,0°	55.0	53.7	53.6	55.3	57.9	59.7	59.4	56.4	52.4	48.8	47.9	90.1	585.1
57,5°	61.0	58.0	56.6	57.3	59.6	61.2	60.5	57.1	52.7	48.9	48.1	101.8	686.9
60,0°	67.7	62.8	59.5	58.6	60.4	61.7	60.4	56.5	51.8	47.9	47.7	99.8	786.7
62,5°	72.9	67.0	61.6	59.1	59.7	60.3	58.2	54.1	50.0	46.9	47.9	84.4	871.1
65,0°	73.6	67.7	61.5	57.3	56.5	56.3	53.4	49.3	45.7	42.4	42.1	58.8	930.0
67,5°	67.4	62.8	56.7	52.6	50.6	48.8	45.7	41.6	37.8	38.1	46.3	30.5	960.5
70,0°	54.3	52.8	48.6	44.1	42.4	41.2	38.7	34.9	31.4	31.5	46.2	14.0	974.4
72,5°	40.1	39.7	38.0	36.1	34.7	33.6	31.1	27.7	24.6	23.9	28.3	8.4	982.8
75,0°	29.2	30.2	29.5	28.2	27.4	25.9	23.6	20.3	18.0	17.6	18.4	6.4	989.2
77,5°	20.4	21.5	20.3	19.1	18.9	18.8	17.2	14.5	12.8	11.7	11.4	4.7	994.0
80,0°	12.4	13.0	12.8	12.0	11.3	10.7	9.7	8.7	7.8	7.1	6.9	3.1	997.1
82,5°	6.7	6.9	6.9	6.2	5.8	5.6	5.1	4.6	4.1	3.8	3.7	1.8	998.9
85,0°	3.0	2.8	2.6	2.4	2.1	1.9	1.8	1.8	1.7	1.7	1.7	0.8	999.7
87,5°	1.3	1.2	1.2	1.2	1.2	1.1	1.1	1.1	1.0	1.0	1.0	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family
Floodlight FL11

Order number: 5XA779417A01BA
EAN: 4058352607961

LP number
59255_50

Dimming levels table

environmental temperature: 10°C

siteco

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	254	104660	757.5
95	237	99482	705.4
90	221	94358	656.4
85	205	88895	607.3
80	190	83636	562.1
75	176	78526	519.9
70	162	73246	478.0
65	148	67858	436.1
60	135	62595	398.0
55	122	57427	359.5
50	110	52346	324.4
45	98	47150	289.3
40	86	41839	254.5
35	74	36431	219.0
30	63	31464	187.8
25	52	26213	156.5
20	41	20905	125.3
15	30	15556	94.5
10	20	10594	66.6
5	9	5007	36.2
2	3	1923	18.7

Dimming levels table

environmental temperature: 25°C

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	254	101100	752.2
95	236	96082	697.0
90	219	90981	645.3
85	203	85834	596.4
80	188	80823	551.2
75	174	75952	509.5
70	160	70905	467.9
65	146	65710	426.6
60	133	60704	388.1
55	120	55616	350.4
50	108	50629	315.4
45	96	45550	280.7
40	84	40381	245.8
35	73	35481	214.0
30	61	30104	180.1
25	51	25432	152.0
20	40	20207	121.1
15	30	15396	93.4
10	19	9972	63.1
5	9	4965	35.8
2	3	1908	18.5

Photometric test report

Family Floodlight FL11	Order number: 5XA779417A01BA EAN: 4058352607961	LP number 59255_50
----------------------------------	--	-------------------------------------

Luminousfluxs table



Temperature °C	Luminous flux lm	Power consumption W
10.0	104660.0	757.5
25.0	101100.0	752.2