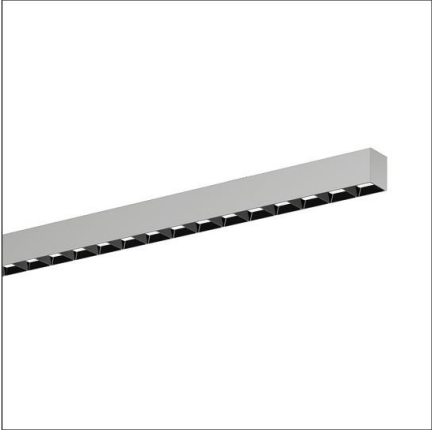

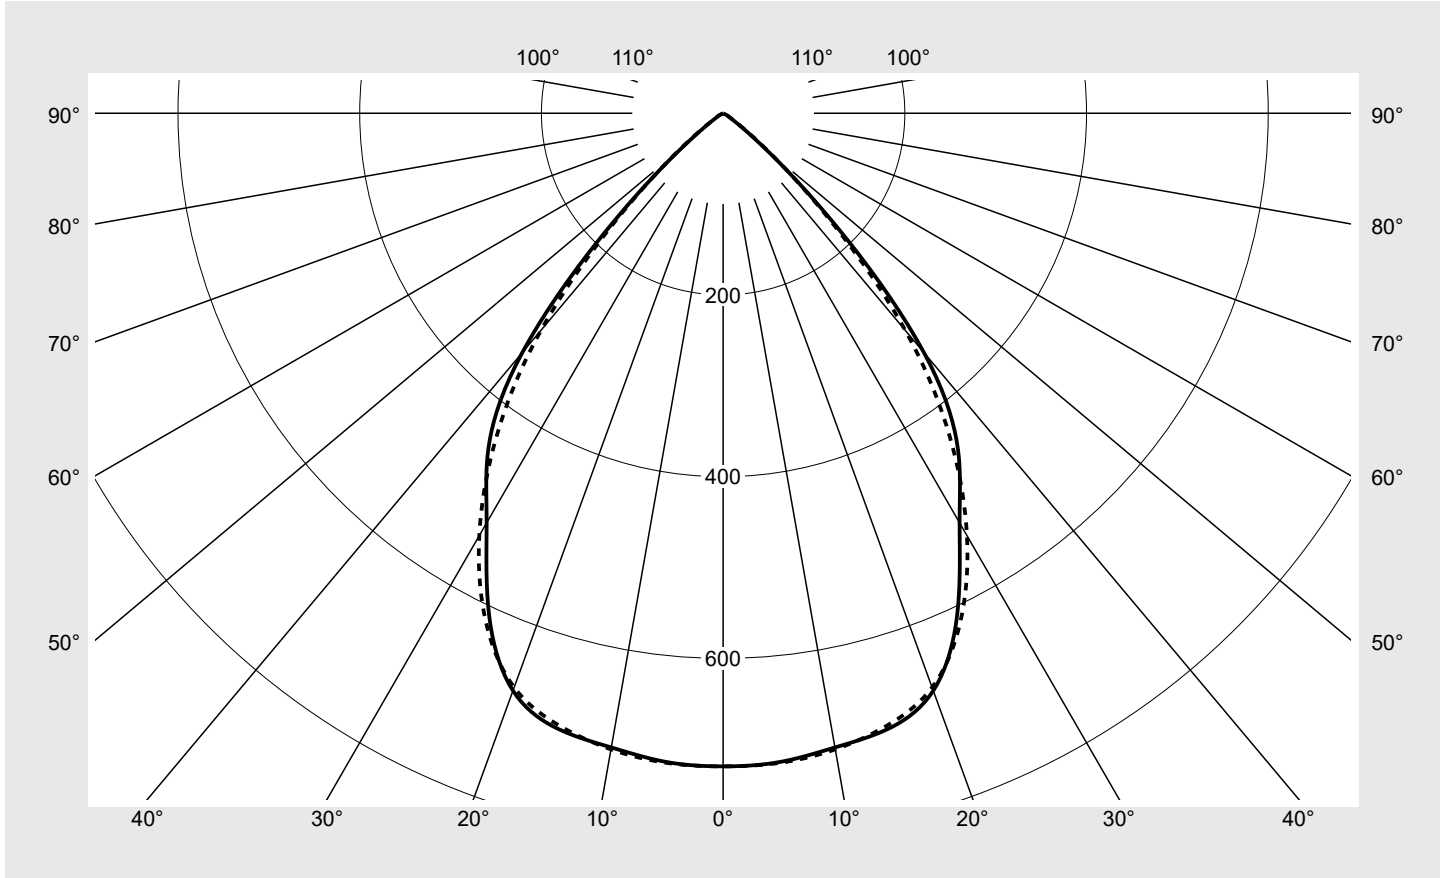


Photometric test report

Family Silica® 21	Order number: 51MX22DA44SB EAN: 4058352896150	LP number 59266_160
	Version surface-mounted luminaire, reflector, black, direct distribution, wide distribution, UGR≤19 (L65≤1000cd/m²)	serial documentation 02.08.2023
	Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-DALI Rated values Net luminous flux = 4320 lm Power consumption = 25.6 W Luminous efficacy = 168.7 lm/W	

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 719 cd/klm**



Classifications	
DIN 5040	A 6 0
CIE	N1=86 N2=100 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21	Order number: 51MX22DA44SB EAN: 4058352896150	LP number 59266_160
-----------------------------	----------------------------------------------------------------	-------------------------------



Table of values for luminous intensities	Maximum luminous intensity
-------------------------------------------------	-----------------------------------

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	718.8	718.8	718.8	718.8	718.8	718.8	718.8	4.3	4.3
5°	716.8	715.7	712.2	716.2	717.8	715.2	717.7	34.2	38.5
10°	708.8	709.0	703.3	708.6	709.9	707.6	710.9	67.4	105.9
15°	701.5	704.3	697.3	698.3	698.8	696.7	697.6	99.2	205.1
20°	676.3	682.5	681.1	681.0	677.6	673.2	672.5	127.2	332.2
25°	609.5	618.9	627.5	636.4	634.5	625.9	617.8	145.0	477.3
30°	520.6	528.9	533.1	542.9	550.7	541.7	536.8	147.4	624.6
35°	450.5	455.7	444.2	436.3	445.0	443.0	435.2	139.8	764.4
40°	343.9	350.9	343.2	332.9	329.4	321.5	312.0	117.8	882.2
45°	178.2	185.2	190.8	192.2	186.9	176.3	167.1	71.3	953.5
50°	59.7	64.4	73.8	78.7	75.2	68.1	63.7	29.5	983.0
55°	15.6	18.5	24.7	31.2	26.2	20.2	17.4	10.3	993.3
60°	6.1	6.8	9.1	12.2	9.8	7.7	7.0	4.1	997.4
65°	2.1	2.4	3.4	4.3	3.8	3.0	2.8	1.6	999.0
70°	1.4	1.4	1.0	1.0	1.2	1.5	1.5	0.7	999.7
75°	0.3	0.4	0.3	0.4	0.4	0.5	0.4	0.2	999.9
80°	0.0	0.0	0.1	0.1	0.1	0.2	0.2	0.1	999.9
85°	0.0	0.0	0.1	0.1	0.1	0.2	0.2	0.1	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Silica® 21	Order number: 51MX22DA44SB EAN: 4058352896150	LP number 59266_160
-----------------------------	----------------------------------------------------------------	-------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	19.0	20.3	19.4	20.6	21.0	18.9	20.2	19.2	20.5	20.8
	3H	18.9	20.0	19.3	20.4	20.7	18.7	19.9	19.1	20.2	20.6
	4H	18.8	19.9	19.2	20.2	20.6	18.7	19.7	19.1	20.1	20.4
	6H	18.8	19.7	19.2	20.1	20.5	18.6	19.5	19.0	19.9	20.3
	8H	18.8	19.6	19.2	20.0	20.4	18.6	19.4	19.1	19.8	20.2
	12H	18.8	19.5	19.2	19.9	20.3	18.6	19.4	19.0	19.7	20.2
4H	2H	18.9	19.9	19.3	20.2	20.6	18.7	19.7	19.1	20.1	20.4
	3H	18.7	19.5	19.1	19.9	20.4	18.5	19.4	19.0	19.8	20.2
	4H	18.6	19.4	19.1	19.8	20.2	18.4	19.2	18.9	19.6	20.0
	6H	18.5	19.2	19.0	19.6	20.1	18.4	19.0	18.8	19.4	19.9
	8H	18.5	19.1	19.0	19.5	20.0	18.3	18.9	18.8	19.3	19.8
	12H	18.5	19.0	19.0	19.4	19.9	18.3	18.8	18.8	19.2	19.7
8H	4H	18.5	19.1	19.0	19.5	20.0	18.3	18.9	18.8	19.3	19.8
	6H	18.4	18.8	18.9	19.3	19.8	18.2	18.7	18.7	19.2	19.7
	8H	18.3	18.7	18.8	19.2	19.8	18.2	18.6	18.7	19.1	19.6
	12H	18.3	18.6	18.8	19.1	19.7	18.1	18.5	18.7	19.0	19.5
12H	4H	18.5	19.0	19.0	19.4	19.9	18.3	18.8	18.8	19.2	19.7
	6H	18.4	18.7	18.9	19.2	19.8	18.2	18.6	18.7	19.1	19.6
	8H	18.3	18.6	18.8	19.1	19.7	18.1	18.5	18.7	19.0	19.5

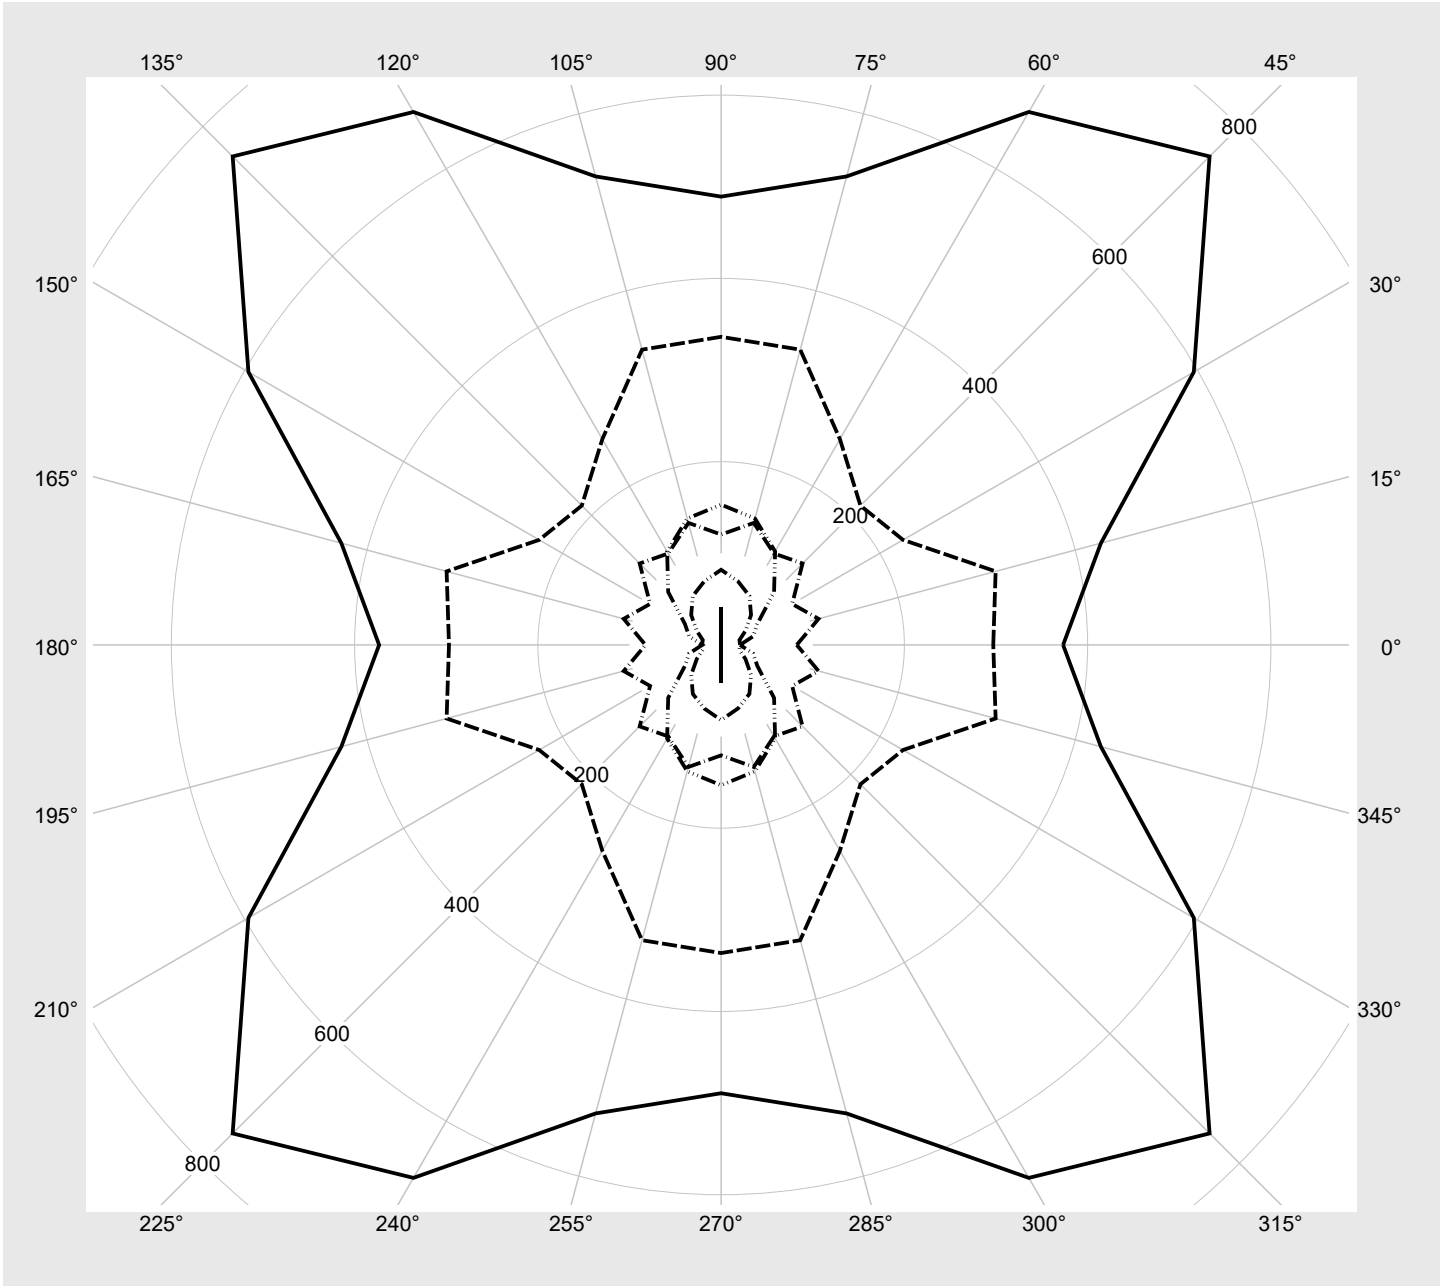
Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1176 B = 49
------------------------	---------------------------------------------------	--------------------------------------	----------------------------------

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		18893.8	19639.4	20224.8	20378.7	19816.4	18686.5	17719.1	
50°		6967.4	7515.8	8602.9	9174.9	8765.7	7944.9	7434.7	
55°		2040.2	2416.2	3223.4	4082.0	3422.4	2643.9	2274.9	
60°		914.5	1022.3	1370.7	1828.8	1475.1	1154.2	1044.6	
65°		373.2	429.1	595.7	753.9	671.6	529.3	489.2	
70°		297.0	310.2	229.3	215.0	259.3	333.6	336.2	
75°		82.6	110.1	89.5	125.7	115.3	137.9	120.5	
80°		20.7	20.7	30.7	46.2	61.7	71.7	82.0	
85°		20.6	36.1	45.6	81.7	117.8	142.8	153.1	

Photometric test report

Family Silica® 21	Order number: 51MX22DA44SB EAN: 4058352896150	LP number 59266_160
------------------------------------	----------------------------------------------------------------	--------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**



Photometric test report

Family Silica® 21	Order number: 51MX22DA44SB EAN: 4058352896150	LP number 59266_160
-----------------------------	----------------------------------------------------------------	-------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	4320	25.6
95	240	252	4096	24.2
90	227	250	3884	22.8
85	214	248	3673	21.5
80	201	245	3460	20.2
75	188	243	3246	18.9
70	175	240	3031	17.5
65	162	238	2813	16.2
60	149	234	2594	15.0
55	136	231	2373	13.7
50	124	228	2168	12.5
45	111	224	1945	11.2
40	98	219	1721	10.0
35	86	214	1513	8.8
30	74	209	1303	7.7
25	61	202	1076	6.5
20	49	194	865	5.4
15	37	183	651	4.3
10	25	169	437	3.2
5	13	145	224	1.9
3	8	127	134	1.2