


Photometric test report

Family Licross® 21 Protected	Order number: 52TP12DN4E5M3S EAN: 4058352908402	LP number 58523_194
Version	prismatic cover, frosted, wide distribution	serial documentation 17.08.2023
Lamps	LED 4000 K CRI ≥ 80	
Controlgear	ECG-DALI	
Setting	emergency light operation: 3 h	
Rated values	Net luminous flux = 910 lm Power consumption = 7.6 W Luminous efficacy = 119.7 lm/W	



Luminous intensity in cd/klm C180-0 C270-90 **Imax: 630 cd/klm**

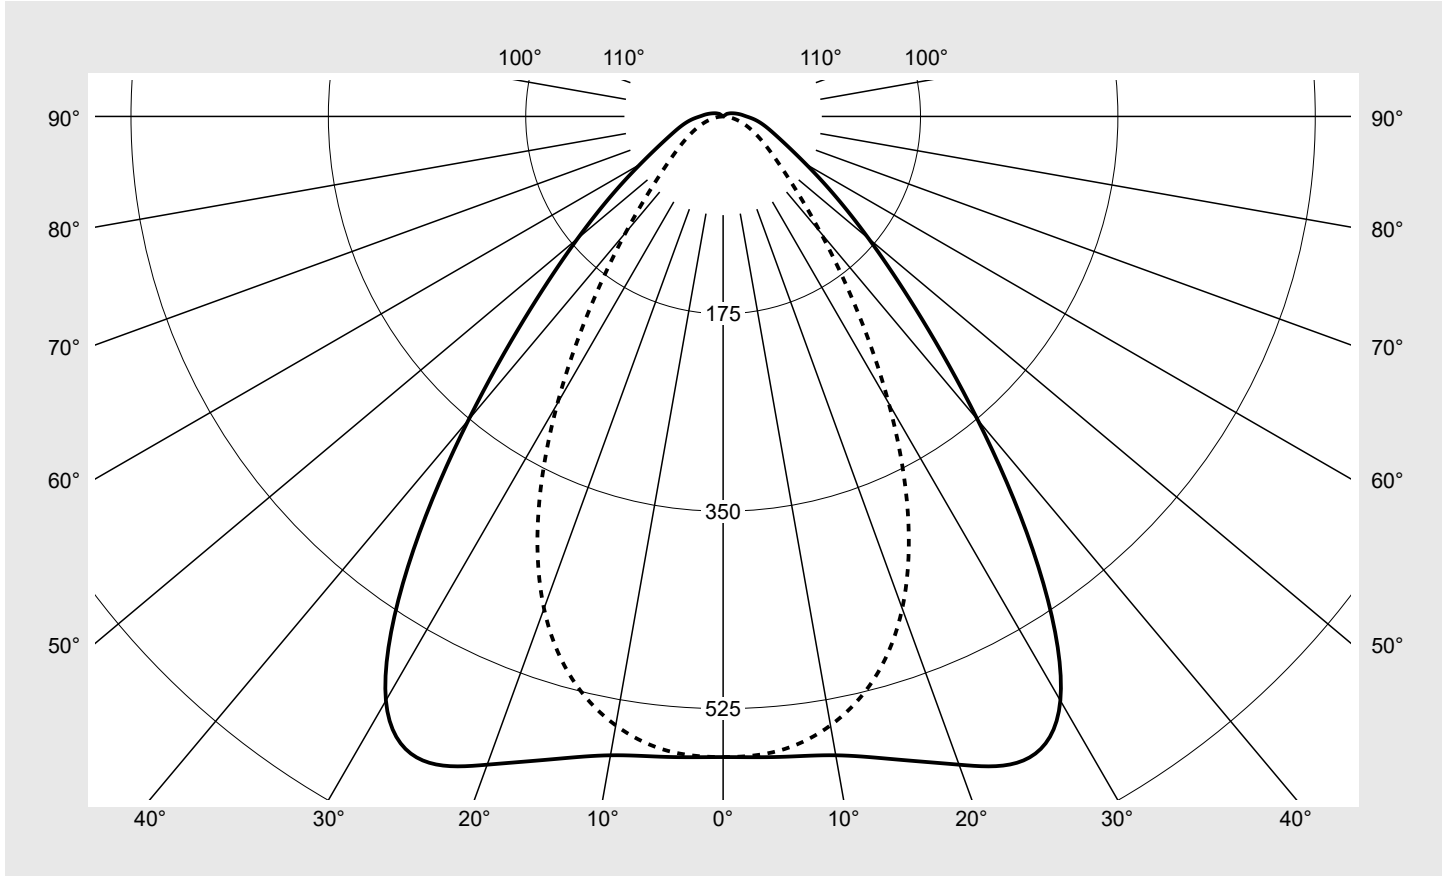

Classifications	
DIN 5040	A 5 1
CIE	N1=70 N2=91 N3=97 N4=98 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	98.3%
ϕ_o	1.7%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 21 Protected	Order number: 52TP12DN4E5M3S EAN: 4058352908402	LP number 58523_194
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	0°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
	180°	Luminous intensity in cd/klm							Luminous flux in lm/klm
0°	568.0	568.0	568.0	568.0	568.0	568.0	568.0	3.4	3.4
5°	570.0	568.0	563.9	564.4	565.6	564.2	564.6	27.0	30.4
10°	575.1	572.9	563.4	557.9	553.3	549.0	548.2	53.3	83.7
15°	590.1	586.0	566.8	548.5	532.2	519.9	516.5	78.2	161.9
20°	611.6	603.6	568.7	531.0	496.5	471.9	464.3	100.3	262.2
25°	630.0	617.6	564.2	499.9	441.6	401.0	387.5	117.1	379.3
30°	598.0	589.4	536.5	452.4	368.0	311.9	293.8	123.5	502.8
35°	487.1	490.1	463.2	383.1	284.6	222.1	203.0	114.7	617.4
40°	351.1	360.8	359.1	297.2	205.7	150.3	134.3	94.9	712.3
45°	241.7	250.7	257.1	211.9	140.4	100.6	89.9	72.8	785.1
50°	168.3	174.0	178.9	144.5	94.4	69.8	63.7	54.4	839.5
55°	118.9	121.8	123.3	97.4	64.6	50.4	47.5	40.5	880.0
60°	85.1	85.8	84.4	66.1	45.7	37.4	36.1	30.1	910.0
65°	63.8	62.6	58.2	45.7	33.4	28.1	27.2	22.6	932.7
70°	50.4	47.7	40.8	32.1	24.8	20.7	19.9	17.3	949.9
75°	41.3	37.6	29.5	22.7	17.9	14.5	13.5	13.2	963.2
80°	34.0	30.0	21.9	15.9	12.4	9.4	8.0	10.0	973.1
85°	27.2	23.7	16.4	11.2	8.0	5.3	3.6	7.3	980.4
90°	20.7	17.9	12.0	7.4	4.6	2.2	0.4	5.0	985.4
95°	16.6	14.7	10.2	6.3	3.6	1.3	0.3	4.0	989.4
100°	13.2	11.9	8.5	5.2	2.7	0.8	0.3	3.2	992.6
105°	10.4	9.5	6.9	4.1	1.9	0.4	0.3	2.5	995.1
110°	8.2	7.4	5.5	3.1	1.2	0.3	0.3	1.9	997.0
115°	6.5	5.8	4.2	2.2	0.7	0.4	0.4	1.4	998.4
120°	4.9	4.3	3.0	1.4	0.6	0.5	0.5	1.0	999.4
125°	3.5	3.0	2.0	0.9	0.6	0.5	0.5	0.7	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 21 Protected	Order number: 52TP12DN4E5M3S EAN: 4058352908402	LP number 58523_194
--	--	-------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	13.6	15.1	14.0	15.4	15.7	9.5	10.9	9.8	11.2	11.6
	3H	14.2	15.5	14.6	15.9	16.2	9.9	11.2	10.3	11.6	11.9
	4H	14.6	15.8	15.0	16.1	16.5	10.1	11.3	10.5	11.7	12.0
	6H	15.0	16.1	15.4	16.4	16.8	10.2	11.4	10.6	11.8	12.1
	8H	15.3	16.2	15.7	16.6	17.0	10.3	11.4	10.7	11.8	12.2
	12H	15.5	16.4	16.0	16.8	17.2	10.4	11.4	10.8	11.7	12.2
4H	2H	13.7	14.9	14.1	15.3	15.6	10.2	11.3	10.6	11.7	12.1
	3H	14.4	15.4	14.8	15.8	16.2	10.7	11.7	11.1	12.1	12.5
	4H	14.9	15.8	15.3	16.2	16.6	11.0	11.9	11.4	12.3	12.7
	6H	15.4	16.2	15.9	16.6	17.1	11.2	12.0	11.6	12.4	12.9
	8H	15.8	16.5	16.2	16.9	17.4	11.3	12.0	11.7	12.4	12.9
	12H	16.1	16.7	16.6	17.2	17.7	11.3	12.0	11.8	12.4	12.9
8H	4H	14.9	15.6	15.3	16.1	16.5	11.3	12.0	11.8	12.4	12.9
	6H	15.5	16.1	16.0	16.6	17.1	11.6	12.2	12.1	12.7	13.2
	8H	15.9	16.5	16.4	16.9	17.5	11.7	12.3	12.2	12.7	13.3
	12H	16.4	16.9	17.0	17.4	17.9	11.9	12.3	12.4	12.8	13.3
12H	4H	14.9	15.5	15.4	16.0	16.5	11.4	12.0	11.9	12.4	12.9
	6H	15.5	16.1	16.1	16.5	17.1	11.8	12.2	12.3	12.7	13.2
	8H	16.0	16.4	16.5	16.9	17.5	11.9	12.3	12.4	12.8	13.4

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1480	H(C0) = 13	H(C180) = 13
			B = 78	H(C90) = 0	H(C270) = 0

C-planes	γ	Luminance in cd/m ²								
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°		
45°		2309.7	2406.9	2505.0	2112.9	1444.7	1075.2	1002.6		
50°		1722.1	1790.6	1872.5	1553.8	1052.9	813.6	781.4		
55°		1319.7	1361.5	1405.5	1145.6	793.2	652.1	653.1		
60°		1041.0	1058.3	1064.2	865.7	629.4	548.4	568.5		
65°		876.5	867.6	829.4	680.0	528.5	478.9	506.9		
70°		796.3	762.0	673.8	558.9	464.4	426.5	458.1		
75°		774.9	715.4	584.0	480.4	417.0	380.2	411.3		
80°		792.9	712.3	547.8	433.7	380.7	342.7	364.0		
85°		845.7	753.6	559.6	430.5	370.0	318.6	327.5		

Photometric test report

Family Licross® 21 Protected	Order number: 52TP12DN4E5M3S EAN: 4058352908402	LP number 58523_194
--	--	--------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

