

Photometric test report

Family
Licross® 11 Recessed

Order number: 51TE14DN49XG
EAN: 4058352929278

LP number
58683_318



Version cover frosted, asymmetric distribution
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG-DALI
Rated values Net luminous flux = 9430 lm
 Power consumption = 56.7 W
 Luminous efficacy = 166.3 lm/W

serial
documentation
14.09.2023


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 681 cd/klm

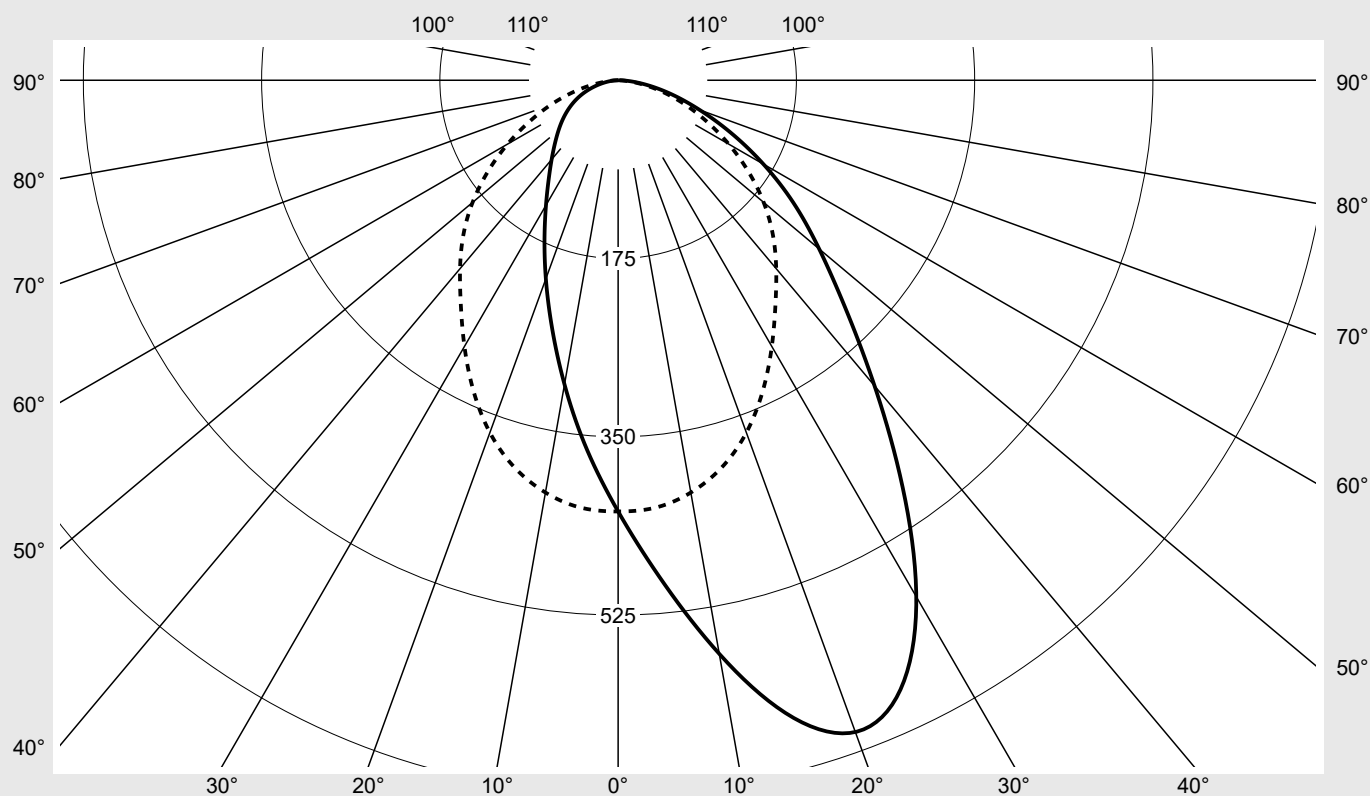

Classifications

DIN 5040 A 4 0
 CIE N1=56 N2=84 N3=97
 N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE14DN49XG EAN: 4058352929278	LP number 58683_318
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°
γ	Luminous intensity in cd/klm						
0°	423.3	423.3	423.3	423.3	423.3	423.3	423.3
5°	492.9	491.4	480.7	469.8	456.1	438.7	421.2
10°	571.7	566.6	544.9	518.0	484.6	447.0	411.0
15°	644.7	637.1	605.9	562.5	507.2	447.4	393.4
20°	680.9	674.8	644.8	594.0	519.7	438.2	368.1
25°	657.9	657.6	642.1	600.0	518.2	419.3	336.2
30°	585.4	591.2	594.0	574.0	501.7	394.4	301.7
35°	486.6	496.5	513.6	518.9	472.6	367.8	269.2
40°	391.6	400.9	423.7	447.6	435.3	342.4	241.4
45°	315.0	320.7	340.1	373.0	389.0	312.9	214.9
50°	257.7	259.4	273.6	305.9	334.9	275.1	186.5
55°	210.4	209.0	219.8	247.0	276.4	230.5	156.0
60°	164.7	163.2	172.4	194.6	218.3	183.7	125.4
65°	122.2	121.6	130.0	147.7	165.1	139.3	96.1
70°	85.2	85.7	92.4	106.6	118.3	100.1	70.2
75°	55.7	56.1	61.0	71.1	77.9	65.9	46.5
80°	31.6	31.9	35.4	40.3	43.4	36.3	25.7
85°	13.1	12.9	14.6	16.5	16.2	13.2	9.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm						Luminous flux in lm/klm	
0°	423.3	423.3	423.3	423.3	423.3	423.3	2.5	2.5
5°	404.2	389.5	375.7	365.6	362.1	361.8	20.2	22.8
10°	378.5	351.6	328.9	312.6	305.3	303.2	40.3	63.1
15°	347.6	311.7	283.3	263.5	254.2	251.1	59.8	123.0
20°	312.8	271.7	241.2	220.7	211.0	207.4	77.2	200.1
25°	275.0	232.7	202.9	183.7	174.4	171.0	89.9	290.0
30°	237.7	196.9	169.7	152.6	144.6	141.7	96.4	386.5
35°	204.1	165.0	141.0	127.0	121.0	118.9	96.9	483.4
40°	176.0	138.8	117.2	106.8	102.8	101.6	93.4	576.7
45°	151.3	116.9	98.0	90.5	88.3	87.8	87.1	663.9
50°	128.6	98.3	82.7	77.4	76.2	76.3	79.3	743.1
55°	107.1	82.4	69.7	65.9	65.5	66.0	69.9	813.0
60°	87.0	68.0	58.3	55.3	55.4	56.0	59.0	872.0
65°	68.6	55.0	47.7	45.3	45.4	45.9	47.4	919.5
70°	51.6	42.4	37.2	35.1	35.2	35.4	35.8	955.3
75°	35.3	29.8	26.5	24.5	24.4	24.5	24.7	980.0
80°	20.2	17.6	15.6	14.5	14.4	14.5	14.3	994.3
85°	7.8	7.1	6.7	6.2	6.2	6.3	5.7	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0


Photometric test report

Family Licross® 11 Recessed			Order number: 51TE14DN49XG EAN: 4058352929278							LP number 58683_318	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	26.2	27.8	26.5	28.1	28.4	24.8	26.4	25.1	26.7	27.0
	3H	27.2	28.6	27.5	28.9	29.3	25.9	27.4	26.3	27.7	28.0
	4H	27.5	28.9	27.9	29.2	29.6	26.3	27.7	26.7	28.0	28.4
	6H	27.8	29.0	28.2	29.4	29.8	26.6	27.8	27.0	28.2	28.6
	8H	27.9	29.0	28.3	29.4	29.8	26.7	27.8	27.1	28.2	28.6
	12H	27.9	29.0	28.4	29.4	29.8	26.8	27.8	27.2	28.2	28.6
4H	2H	26.9	28.3	27.3	28.6	29.0	25.4	26.8	25.8	27.1	27.5
	3H	28.1	29.2	28.5	29.6	30.0	26.8	27.9	27.2	28.3	28.7
	4H	28.5	29.5	28.9	29.9	30.4	27.4	28.4	27.8	28.8	29.2
	6H	28.8	29.7	29.3	30.2	30.6	27.7	28.6	28.2	29.0	29.5
	8H	29.0	29.8	29.4	30.2	30.7	27.8	28.7	28.3	29.1	29.6
	12H	29.0	29.8	29.5	30.2	30.7	27.9	28.6	28.4	29.1	29.6
8H	4H	28.8	29.6	29.3	30.1	30.6	27.6	28.4	28.1	28.9	29.3
	6H	29.3	29.9	29.8	30.4	30.9	28.1	28.8	28.6	29.2	29.7
	8H	29.4	30.0	29.9	30.5	31.0	28.3	28.9	28.8	29.3	29.9
	12H	29.6	30.0	30.1	30.5	31.1	28.4	28.9	28.9	29.4	29.9
12H	4H	28.9	29.6	29.4	30.1	30.6	27.6	28.3	28.1	28.8	29.3
	6H	29.4	29.9	29.9	30.4	30.9	28.2	28.7	28.7	29.2	29.7
	8H	29.5	30.0	30.1	30.5	31.1	28.4	28.9	28.9	29.4	29.9

Luminance table		Max. for $\gamma \geq 65^\circ$					Photometric dimensions in mm:		L = 1500 B = 58				
C-planes	0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°
γ	Luminance in cd/m²												
45°	48280.0	49152.5	52138.4	57179.7	59622.8	47969.7	32942.8	23199.5	17916.0	15015.3	13877.1	13538.7	13452.4
50°	43448.6	43736.6	46136.1	51575.2	56481.0	46381.5	31450.6	21692.2	16582.7	13939.0	13044.2	12855.4	12868.2
55°	39751.4	39500.4	41532.2	46671.6	52241.0	43552.2	29472.9	20246.3	15567.1	13170.9	12458.5	12379.7	12480.0
60°	35702.0	35386.8	37374.7	42187.0	47328.4	39815.2	27174.2	18853.3	14735.9	12630.1	11998.0	12002.1	12147.6
65°	31338.6	31176.5	33333.7	37875.6	42336.5	35718.4	24652.6	17591.6	14117.1	12227.2	11623.9	11641.6	11783.0
70°	26994.4	27172.8	29289.5	33793.1	37481.0	31728.7	22246.1	16347.3	13431.1	11799.6	11108.1	11152.2	11204.2
75°	23334.6	23493.7	25530.3	29768.4	32620.8	27607.0	19491.3	14787.5	12499.2	11079.5	10242.3	10218.5	10244.9
80°	19754.6	19928.1	22079.7	25175.1	27062.1	22652.1	16059.4	12616.9	10990.9	9727.5	9075.8	9012.8	9064.0
85°	16281.8	16100.2	18106.2	20474.1	20128.4	16383.8	11358.2	9714.1	8864.7	8274.0	7771.5	7731.7	7802.6

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE14DN49XG EAN: 4058352929278	LP number 58683_318
Luminance values in cd/m²		siteco
		γ 65° γ 70° γ 75° γ 80° γ 85°

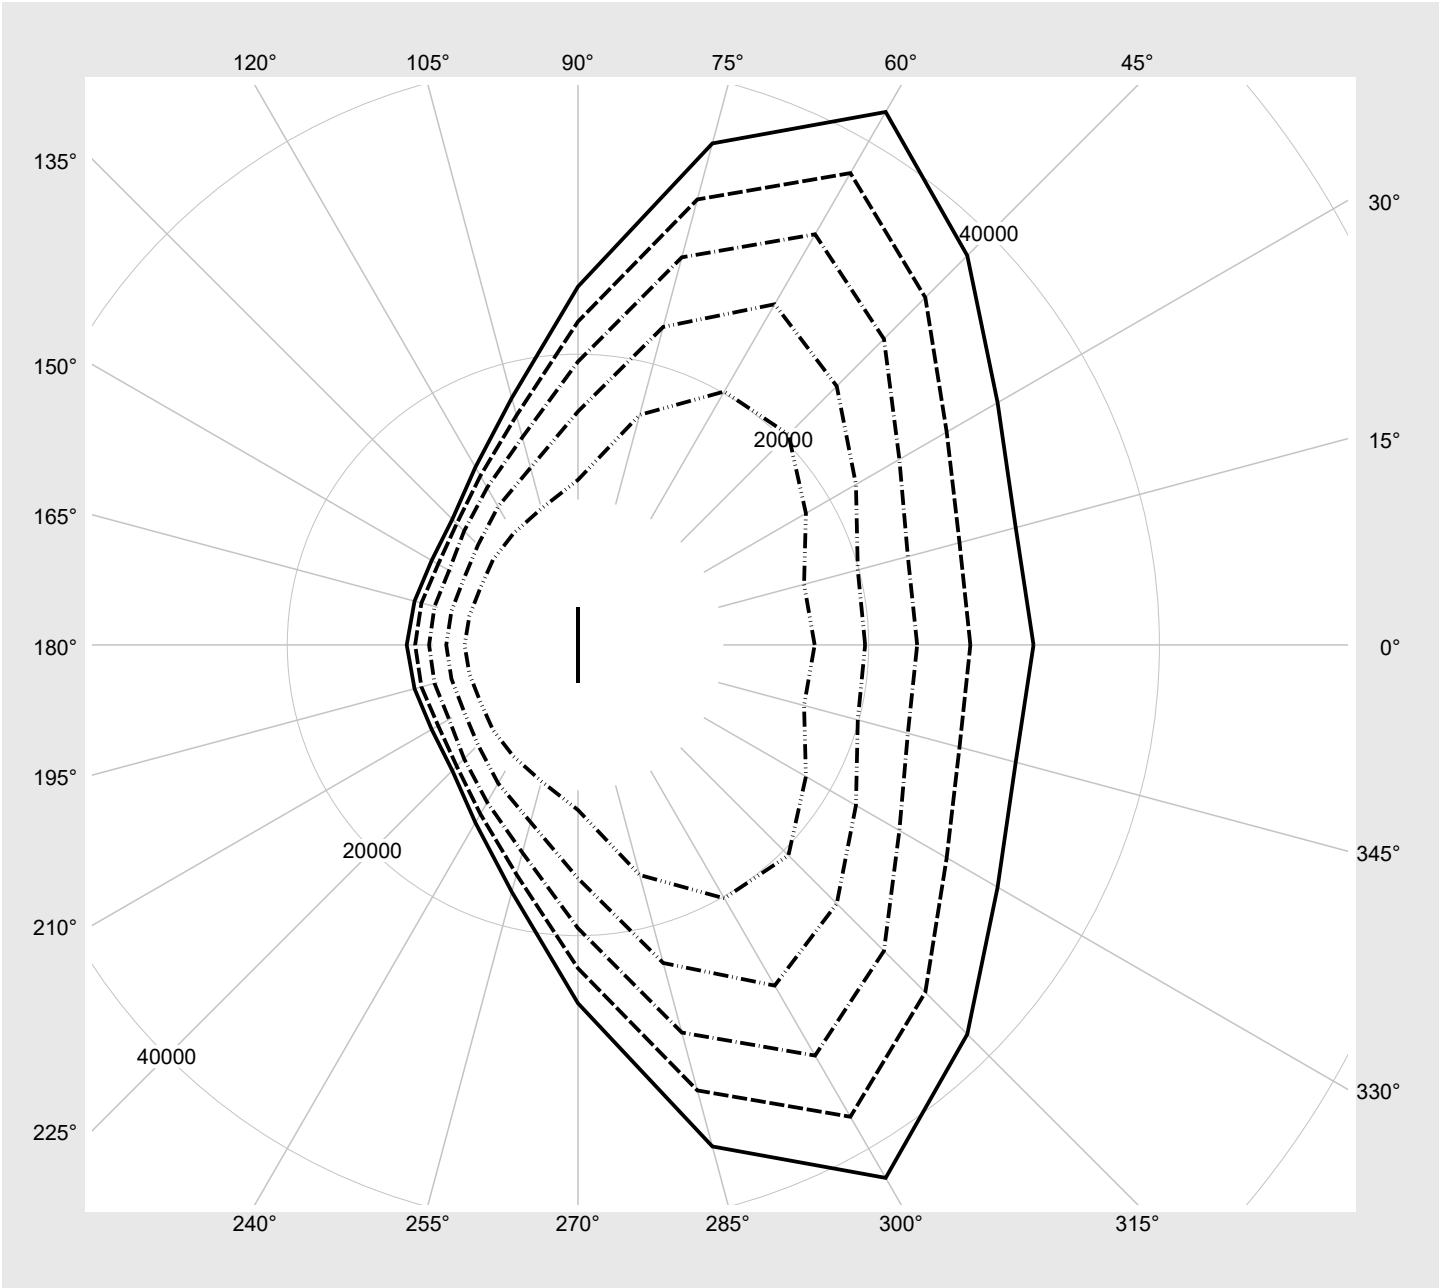

Photometric test report

Family Licross® 11 Recessed	Order number: 51TE14DN49XG EAN: 4058352929278	LP number 58683_318
Dimming levels table environmental temperature: 25°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	9430	56.7
95	240	252	8954	53.6
90	226	250	8470	50.4
85	213	248	8019	47.5
80	199	245	7529	44.4
75	186	243	7067	41.5
70	173	240	6604	38.5
65	160	237	6137	35.7
60	147	234	5664	32.8
55	134	231	5184	29.9
50	121	227	4702	27.2
45	109	223	4253	24.6
40	96	218	3760	21.9
35	84	213	3304	19.3
30	72	208	2844	16.9
25	60	201	2377	14.4
20	47	192	1870	11.6
15	35	181	1397	9.1
10	24	168	960	6.8
5	12	142	477	4.4
2	4	102	153	2.8