


Photometric test report


Family Streetlight 31 midi toolless	Order number: 5XH7A31T08MA EAN: 4069025098184	LP number 59580_92
	Version	post-top or side-entry mounting, Smart Interface up/down
	Optic	direct, asymmetric extremely wide distribution P100003
	Cover	toughened safety glass
	Lamps	LED 3000 K CRI ≥ 70
	Controlgear	ECG SITECO - Smart Interface
Rated values		serial documentation 10.04.2024
Net luminous flux = 18750 lm		
Power consumption = 142.8 W		
Luminous efficacy = 131.3 lm/W		

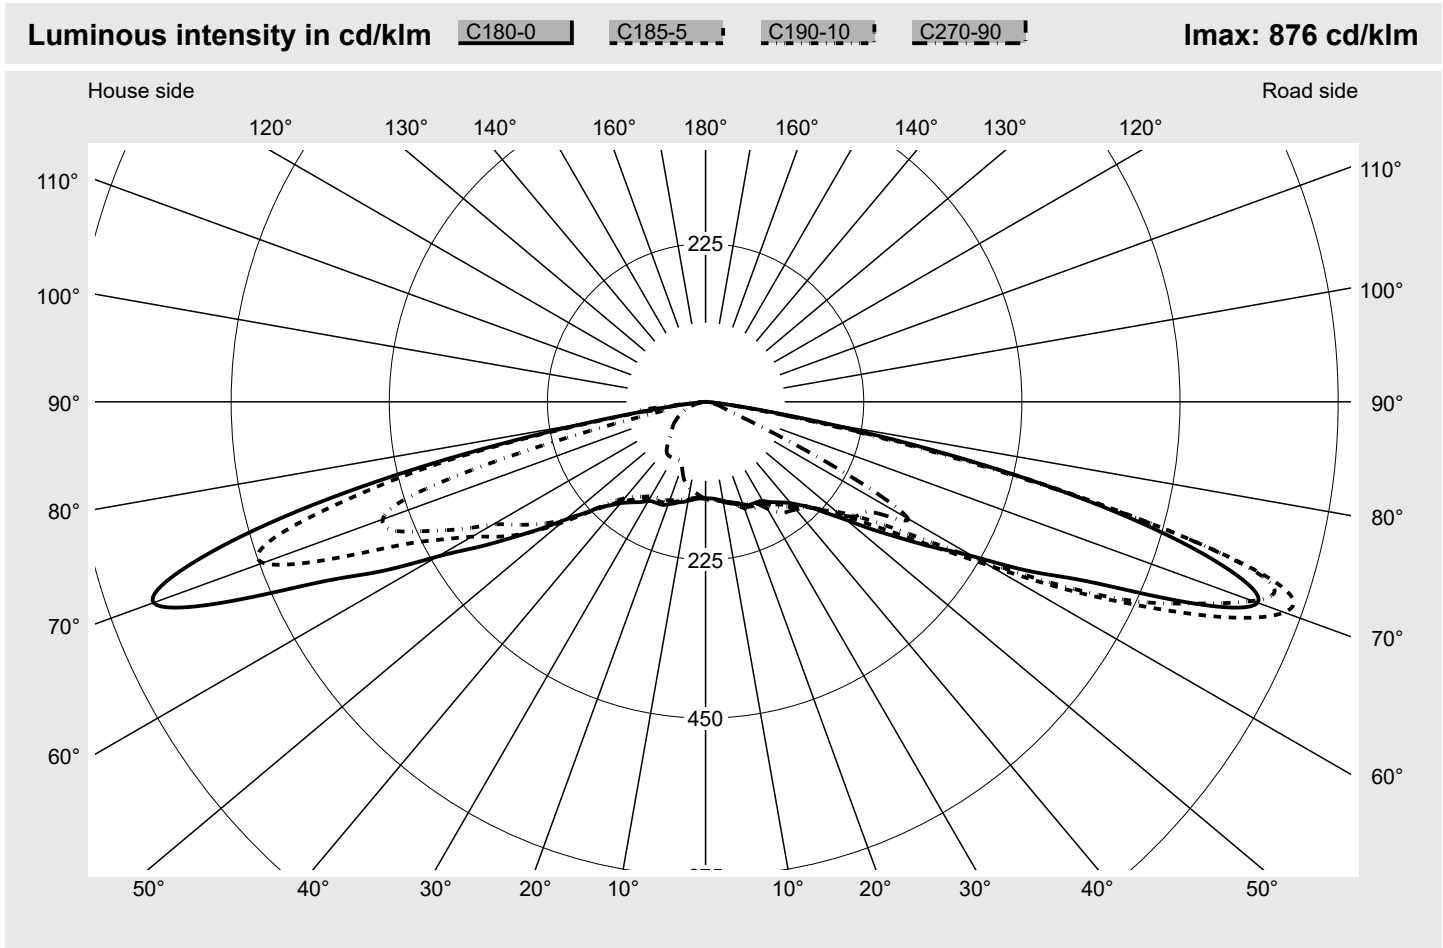

Luminaire output ratios		Luminous intensity class acc. to EN13201-2	
Eta	100.0%	Class:	G1
Eta 0° - 90°	100.0%	Imax 70°	876.0
Eta 90° - 180°	0.0%	Imax 80°	162.9
Measurement conditions		Imax 90°	0.0
		Imax >90°	0.0
		Imax >95°	0.0
DIN EN 13032 and DIN 5032			

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7A31T08MA EAN: 4069025098184	LP number 59580_92
Envelope curve in cd/klm KMK 70° KMK 67.5° KMK 65° KMK 62.5°		siteco

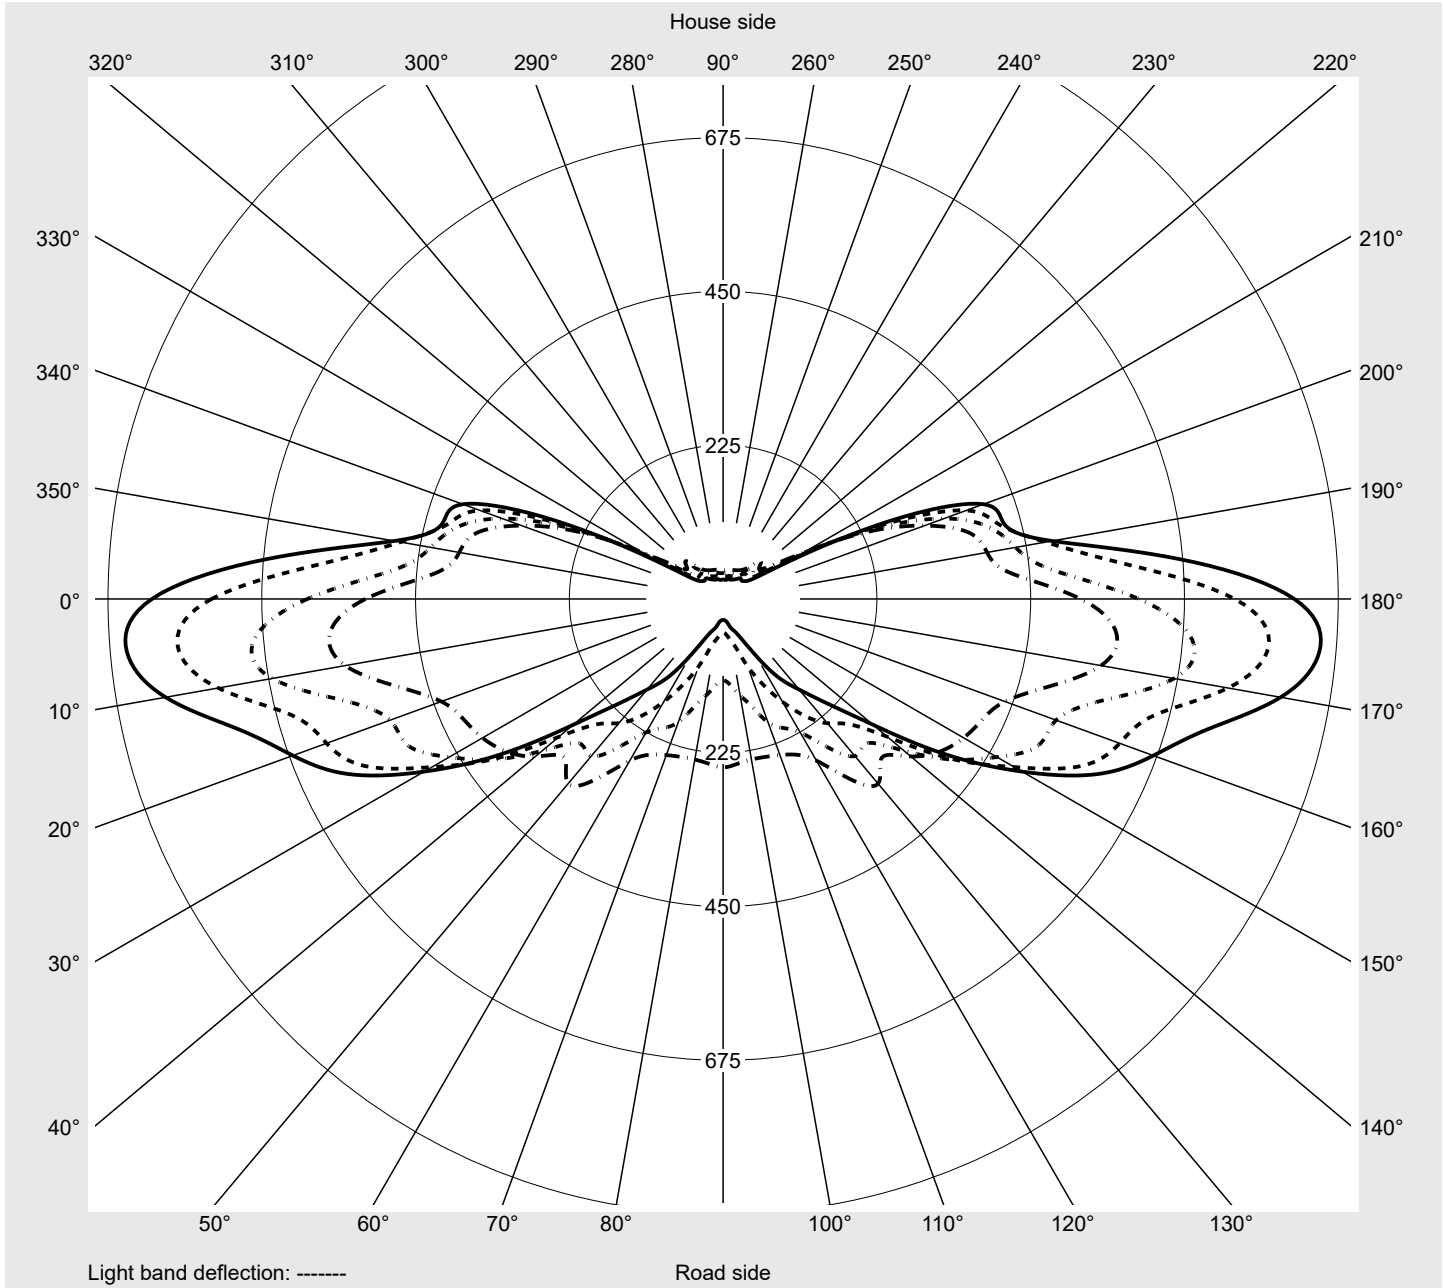

Photometric test report

Family Streetlight 31 midi toolless		Order number: 5XH7A31T08MA EAN: 4069025098184										LP number 59580_92	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7
2,5°	137.6	137.8	138.1	138.4	138.7	138.9	139.1	139.2	139.4	139.6	139.8	140.0	140.2
5,0°	138.5	139.2	139.6	140.3	140.5	140.9	141.1	141.2	141.4	141.4	141.4	141.3	141.2
7,5°	140.5	141.3	142.0	142.6	143.1	143.3	143.5	143.3	143.1	142.9	142.6	142.4	142.2
10,0°	143.0	144.0	144.7	145.4	145.8	145.8	145.8	145.5	145.2	145.0	145.0	144.8	144.8
12,5°	145.8	146.9	147.9	148.9	149.3	149.4	149.3	149.0	148.9	149.1	149.1	149.3	149.3
15,0°	148.1	149.7	151.3	152.6	153.4	153.6	153.4	153.2	153.5	153.9	154.4	154.3	153.8
17,5°	151.7	153.6	155.7	157.5	158.7	158.8	158.8	159.1	159.4	159.8	159.7	159.2	158.2
20,0°	155.1	158.1	161.0	163.3	164.2	164.1	164.6	165.3	165.7	165.4	164.5	163.2	161.8
22,5°	158.8	161.7	165.4	168.6	169.9	170.3	170.6	171.2	171.3	170.6	169.1	167.3	166.1
25,0°	159.7	162.7	166.1	169.6	172.1	174.1	175.7	176.2	175.6	174.6	173.5	172.8	171.9
27,5°	160.5	163.1	166.1	169.3	172.0	175.1	178.4	179.6	178.9	178.4	178.4	178.1	176.9
30,0°	162.9	166.0	168.1	170.2	171.6	174.4	178.2	181.1	182.4	182.5	182.5	182.3	182.5
32,5°	168.9	172.1	174.5	175.7	174.6	174.4	176.5	180.0	185.2	187.4	187.6	188.9	191.5
35,0°	174.4	178.4	182.5	184.8	182.5	180.4	176.7	177.9	185.6	194.2	194.3	195.4	199.0
37,5°	180.6	184.7	188.1	190.0	189.4	187.5	184.0	179.4	184.8	195.6	197.1	198.4	207.5
40,0°	188.3	193.0	196.0	196.4	195.8	194.5	193.8	189.1	183.5	191.7	198.6	205.7	221.9
42,5°	199.5	201.6	203.3	202.7	200.8	199.7	201.6	201.1	191.3	187.7	204.5	218.7	240.8
45,0°	212.8	213.5	214.0	210.6	206.9	204.9	205.5	210.8	207.3	188.5	215.7	238.2	261.1
47,5°	234.8	228.3	226.8	222.0	215.4	211.2	210.0	219.7	224.9	198.8	232.6	260.4	279.8
50,0°	261.5	249.9	243.2	238.9	228.9	221.6	220.2	228.8	245.1	220.2	254.2	283.6	303.5
52,5°	297.7	280.2	266.1	259.2	247.5	239.7	238.5	246.0	265.8	247.9	282.3	316.4	335.3
55,0°	337.4	322.0	301.1	288.9	277.4	268.8	266.3	269.5	288.8	278.7	319.2	344.1	347.3
57,5°	385.1	381.6	359.0	337.9	321.9	309.6	301.3	298.3	309.3	319.9	348.2	353.7	371.5
60,0°	440.3	466.2	448.4	408.8	375.5	357.0	344.2	340.3	341.9	339.0	355.2	362.7	338.2
62,5°	523.2	577.6	561.4	494.1	438.7	418.3	406.4	388.4	358.4	328.4	352.8	320.5	273.2
65,0°	608.4	689.1	670.0	574.3	518.4	508.2	462.7	409.5	345.5	298.5	299.9	263.6	225.5
67,5°	748.5	800.9	750.1	654.7	617.4	578.3	491.9	407.7	313.8	258.9	237.3	209.1	173.7
70,0°	835.7	876.0	828.3	735.0	669.9	605.9	505.2	395.6	286.5	216.9	173.1	138.8	95.3
72,5°	767.9	847.4	834.6	753.0	675.5	624.1	476.4	338.3	269.5	155.5	103.4	68.3	45.4
75,0°	601.3	627.5	623.8	596.1	588.3	536.2	347.0	224.8	141.1	94.6	57.6	37.7	31.5
77,5°	377.2	369.4	340.9	324.6	382.3	290.7	181.7	68.8	46.5	55.4	30.3	22.6	19.4
80,0°	162.9	136.5	129.6	138.8	127.6	130.2	48.4	27.0	26.4	29.1	16.9	12.4	11.1
82,5°	43.8	36.6	34.8	35.5	31.5	36.1	19.4	15.8	10.2	11.2	8.3	6.4	6.1
85,0°	4.0	3.8	4.0	5.1	5.8	5.1	4.0	3.4	3.4	3.3	3.4	2.9	2.4
87,5°	1.6	1.6	1.6	1.6	1.4	1.4	1.4	1.2	1.1	1.0	1.0	0.9	0.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 midi toolless		Order number: 5XH7A31T08MA EAN: 4069025098184										LP number 59580_92	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7
2,5°	140.3	140.4	140.6	140.7	140.6	140.7	137.3	136.8	136.5	136.2	136.0	135.7	135.4
5,0°	141.1	141.1	141.1	141.0	141.0	140.9	137.8	137.0	136.4	135.7	135.0	134.3	133.8
7,5°	142.0	142.0	142.0	141.9	141.9	141.9	139.4	138.3	137.3	136.3	135.2	134.2	133.3
10,0°	144.7	144.6	144.5	144.5	144.5	144.5	141.8	140.4	139.1	137.7	136.2	134.7	133.2
12,5°	149.0	148.6	148.1	147.8	147.6	147.5	144.3	142.7	141.1	139.3	137.4	135.6	134.0
15,0°	153.2	152.3	151.4	150.5	149.8	149.5	146.4	144.4	142.4	140.2	138.1	136.0	133.8
17,5°	157.0	155.4	153.9	152.4	151.3	151.0	149.2	146.7	143.9	141.2	138.5	135.7	132.9
20,0°	160.4	158.8	156.9	154.9	153.7	153.4	152.3	149.1	145.6	142.2	138.6	135.3	132.1
22,5°	165.5	164.5	162.2	159.4	157.3	156.6	155.1	151.1	147.4	143.6	139.6	135.8	131.5
25,0°	170.8	168.7	166.0	162.7	159.8	158.7	156.2	152.3	148.5	144.4	140.4	136.2	130.8
27,5°	176.0	174.0	171.6	168.7	166.2	165.0	156.9	153.1	149.2	145.0	140.9	135.8	128.2
30,0°	184.5	184.6	183.8	180.6	177.2	175.4	159.5	155.3	150.8	146.5	141.8	134.9	123.5
32,5°	195.4	197.6	198.7	194.5	188.1	184.6	164.6	159.9	154.5	149.5	143.2	133.0	116.6
35,0°	205.3	212.3	214.6	208.3	197.4	192.2	170.0	164.9	159.2	153.4	144.3	128.6	108.6
37,5°	220.1	229.7	229.4	219.5	203.8	196.1	176.3	170.3	164.6	157.3	143.9	122.6	101.1
40,0°	239.9	248.1	246.3	233.7	211.7	199.9	185.0	179.2	172.3	162.5	142.6	115.1	94.4
42,5°	259.0	266.7	261.1	245.8	218.9	204.2	197.3	191.9	183.9	169.6	139.8	107.7	88.8
45,0°	276.7	281.0	272.9	255.5	228.0	209.9	214.7	210.8	199.3	178.4	137.7	99.9	85.4
47,5°	294.0	298.2	291.4	276.4	250.6	234.4	237.9	233.7	216.5	188.6	139.4	93.3	84.2
50,0°	322.1	330.4	318.6	300.5	266.7	251.3	267.9	259.4	235.1	201.0	143.1	91.2	85.4
52,5°	348.5	350.6	342.2	322.0	287.4	267.8	300.3	283.5	253.9	216.6	153.4	94.5	87.8
55,0°	363.6	368.7	344.6	319.7	295.6	274.8	330.8	304.6	274.6	235.8	169.5	102.0	89.2
57,5°	371.4	338.9	325.0	316.3	309.8	299.1	357.3	325.2	301.8	259.9	193.8	115.5	89.8
60,0°	311.8	300.4	292.0	295.6	316.6	332.1	383.9	349.6	330.6	283.7	214.3	128.4	88.8
62,5°	251.4	243.1	239.2	238.5	242.0	246.4	424.5	392.1	373.3	313.8	231.2	134.7	84.5
65,0°	208.3	192.0	163.2	143.3	126.9	119.0	484.3	434.6	404.0	344.1	241.6	131.4	74.2
67,5°	138.1	105.2	74.8	60.9	52.4	49.2	589.7	479.2	419.0	378.8	255.5	121.3	59.0
70,0°	65.5	51.0	43.8	35.2	31.7	30.6	669.9	488.6	425.5	405.3	271.8	102.8	48.7
72,5°	37.7	35.0	33.9	26.0	23.8	23.5	643.4	428.4	419.5	405.8	255.3	81.7	43.6
75,0°	27.9	25.6	24.4	19.8	17.9	17.5	513.0	241.7	319.6	334.9	189.4	58.8	35.0
77,5°	18.2	17.0	15.9	14.2	12.4	12.4	350.6	78.7	160.1	216.5	109.0	42.1	26.4
80,0°	11.5	10.3	9.6	8.1	7.6	7.5	145.4	68.9	132.5	123.3	59.1	28.9	17.3
82,5°	5.9	5.1	4.8	4.2	3.9	4.0	45.8	92.4	98.2	54.2	31.1	19.5	11.7
85,0°	2.2	2.0	1.8	1.6	1.6	1.5	3.8	6.6	9.0	5.6	8.5	7.6	5.3
87,5°	0.8	0.6	0.5	0.5	0.5	0.5	1.7	1.8	1.8	1.8	1.8	1.7	1.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family				Order number: 5XH7A31T08MA								LP number			
Streetlight 31 midi toolless				EAN: 4069025098184								59580_92			
Table of values for luminous intensities												Maximum luminous intensity		sīteco	
C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone		
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm			
0,0°	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	137.7	0.2	0.2		
2,5°	135.3	135.0	134.9	134.9	134.7	134.7	134.9	134.9	135.0	135.1	135.1	1.6	1.9		
5,0°	133.2	132.7	132.4	132.1	131.9	131.7	131.8	131.7	131.8	131.8	131.8	3.3	5.1		
7,5°	132.4	131.5	130.8	130.0	129.4	129.1	128.9	128.9	128.8	128.8	128.9	4.9	10.1		
10,0°	131.9	130.7	129.6	128.6	127.8	126.9	126.4	126.0	125.8	125.8	125.6	6.6	16.6		
12,5°	132.1	130.2	128.2	126.5	125.0	123.7	122.6	121.8	121.3	121.2	121.1	8.3	24.9		
15,0°	131.3	129.1	126.7	124.4	122.2	120.3	118.7	117.3	116.5	116.0	115.9	10.0	34.9		
17,5°	130.2	127.4	124.7	121.4	117.9	114.7	111.9	109.7	108.3	107.5	107.3	11.7	46.7		
20,0°	128.7	125.0	120.6	115.6	110.7	106.5	103.3	100.9	99.4	98.7	98.5	13.4	60.0		
22,5°	126.5	120.4	113.3	106.9	101.5	97.5	94.6	93.0	92.2	92.0	91.9	15.0	75.0		
25,0°	122.9	113.4	104.7	97.9	93.4	91.1	90.1	90.1	90.3	90.8	91.0	16.6	91.7		
27,5°	116.8	105.0	96.2	91.1	89.0	88.7	89.2	89.9	90.7	91.3	91.4	18.3	110.0		
30,0°	108.8	97.0	90.0	87.8	87.6	87.9	89.0	90.3	91.2	92.0	92.2	20.0	130.0		
32,5°	101.0	90.7	87.2	87.1	86.9	87.4	88.7	90.5	91.8	92.7	92.7	22.0	152.0		
35,0°	93.8	87.1	86.7	86.6	86.4	87.1	88.8	90.7	92.3	92.8	92.7	24.1	176.0		
37,5°	89.0	86.6	86.7	86.0	85.9	86.8	88.2	89.9	91.1	91.2	90.8	26.1	202.1		
40,0°	86.3	86.8	85.9	85.4	85.7	86.0	86.4	86.9	87.0	86.2	85.5	28.3	230.5		
42,5°	86.3	86.6	85.4	85.2	84.9	84.4	83.0	81.7	80.6	79.4	78.7	30.7	261.1		
45,0°	86.9	86.1	84.8	83.6	82.2	80.6	78.7	76.5	74.5	72.5	71.7	33.3	294.4		
47,5°	88.0	86.7	83.6	80.8	78.1	76.1	74.1	71.8	69.7	67.7	66.9	36.5	330.9		
50,0°	90.6	89.1	81.1	76.3	73.1	71.2	69.0	67.0	65.3	63.7	63.1	40.4	371.3		
52,5°	92.5	90.6	77.8	71.4	68.2	66.2	64.1	62.3	60.9	59.7	59.1	44.9	416.2		
55,0°	91.0	89.5	75.1	67.0	63.6	61.4	59.1	57.8	56.7	55.7	55.6	49.6	465.8		
57,5°	87.1	90.3	71.6	62.0	58.0	56.1	54.5	53.4	52.6	51.2	51.1	54.7	520.5		
60,0°	79.8	88.3	67.6	57.7	53.6	51.4	49.9	49.0	48.1	46.8	46.6	59.3	579.8		
62,5°	68.5	77.9	63.2	52.8	48.6	46.4	45.1	44.2	43.2	42.2	41.9	62.7	642.5		
65,0°	57.6	63.2	56.5	47.7	44.1	41.7	40.4	40.3	38.7	37.8	37.8	64.7	707.2		
67,5°	48.5	48.6	48.1	41.8	38.5	36.5	35.2	35.0	33.6	33.4	33.2	66.2	773.4		
70,0°	40.7	38.1	39.3	35.9	33.1	31.1	30.1	30.0	28.5	28.1	28.5	67.0	840.4		
72,5°	34.1	30.9	31.6	30.4	28.1	26.2	25.0	24.7	23.5	22.9	22.9	63.1	903.6		
75,0°	28.3	25.1	25.1	24.8	23.1	21.3	20.1	19.5	18.5	17.9	18.2	48.2	951.8		
77,5°	22.0	19.5	18.9	19.3	17.9	16.5	15.2	14.3	13.9	13.4	13.5	27.9	979.7		
80,0°	15.2	13.6	13.0	13.6	12.6	11.5	10.6	9.9	9.4	9.2	9.2	13.1	992.8		
82,5°	10.2	9.1	8.0	8.7	8.1	7.4	6.8	6.2	5.7	5.6	5.7	5.7	998.5		
85,0°	5.1	4.8	4.6	4.6	4.6	4.0	3.6	3.3	3.0	3.1	3.1	1.1	999.6		
87,5°	1.6	1.6	1.6	1.4	1.4	1.5	1.5	1.4	1.3	1.4	1.2	0.4	1000.0		
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0		

office	industry	traffic	retail	public	sports
--------	----------	---------	--------	--------	--------

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7A31T08MA EAN: 4069025098184	LP number 59580_92
Dimming levels table		environmental temperature: 25°C
		sit eco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	18750	142.8	158.8	150.8
95	237	251	17801	132.6	147.2	139.9
90	221	249	16866	123.0	136.5	129.8
85	206	246	15957	114.2	126.6	120.4
80	191	244	15011	105.6	116.9	111.2
75	176	241	14033	96.9	107.3	102.1
70	162	238	13092	89.0	98.4	93.7
65	149	234	12194	81.7	90.3	86.0
60	136	231	11272	74.4	82.1	78.2
55	123	227	10322	67.1	74.2	70.6
50	110	223	9346	60.0	66.2	63.1
45	98	219	8422	53.4	59.0	56.2
40	86	214	7477	46.8	51.7	49.2
35	75	209	6592	40.9	45.0	43.0
30	63	203	5604	34.5	37.8	36.2
25	52	196	4681	28.7	31.5	30.1
20	41	187	3739	23.0	25.1	24.0
15	30	176	2779	17.4	18.9	18.2
11	21	163	1981	12.8	13.9	13.4

Dimming levels table		environmental temperature: 5°C
----------------------	--	--------------------------------

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	19370	144.4	160.5	152.4
95	238	252	18411	134.7	149.5	142.1
90	222	249	17418	125.1	138.7	131.9
85	207	247	16457	116.2	128.8	122.5
80	192	244	15464	107.5	118.9	113.2
75	178	241	14510	99.3	109.9	104.6
70	164	238	13533	91.3	100.9	96.1
65	151	235	12601	83.9	92.6	88.2
60	138	232	11647	76.5	84.5	80.5
55	125	228	10671	69.2	76.3	72.8
50	112	224	9670	61.9	68.3	65.1
45	100	220	8725	55.3	60.9	58.1
40	88	215	7761	48.6	53.6	51.1
35	76	210	6773	42.0	46.3	44.2
30	65	204	5852	36.1	39.6	37.8
25	53	197	4830	29.7	32.5	31.1
20	42	188	3873	23.9	26.1	25.0
15	31	177	2901	18.2	19.8	19.0
10	21	163	2004	13.0	14.1	13.6

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7A31T08MA EAN: 4069025098184	LP number 59580_92
Dimming levels table environmental temperature: 15°C		

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	19090	143.6	159.6	151.6
95	238	252	18162	133.9	148.7	141.3
90	222	249	17198	124.3	137.9	131.1
85	206	246	16197	114.9	127.4	121.2
80	192	244	15292	106.8	118.2	112.5
75	177	241	14290	98.1	108.5	103.3
70	163	238	13329	90.1	99.6	94.8
65	150	235	12413	82.8	91.4	87.1
60	137	231	11473	75.4	83.3	79.4
55	124	228	10509	68.2	75.2	71.7
50	111	224	9519	61.0	67.3	64.2
45	99	219	8584	54.3	59.9	57.1
40	87	215	7627	47.7	52.7	50.2
35	75	209	6649	41.1	45.3	43.2
30	64	204	5734	35.2	38.7	37.0
25	53	197	4804	29.4	32.2	30.8
20	42	188	3854	23.7	25.9	24.8
15	31	177	2888	18.1	19.7	18.9
10	21	163	1995	12.9	14.0	13.4

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7A31T08MA EAN: 4069025098184	LP number 59580_92
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
25.0	18750.0	142.8
5.0	19370.0	144.4
15.0	19090.0	143.6