


Photometric test report

Family Monsun® 21	Order number: 51FB10DP468C2 EAN: 4069025178084	LP number 58939_137
	Version	prismatic diffuser, opal, PMMA, extremely wide distribution
	Lamps	LED 4000 K CRI ≥ 80
	Controlgear	ECG-DALI
	Rated values	Net luminous flux = 6060 lm Power consumption = 32.7 W Luminous efficacy = 185.3 lm/W
		serial documentation 08.05.2024
		

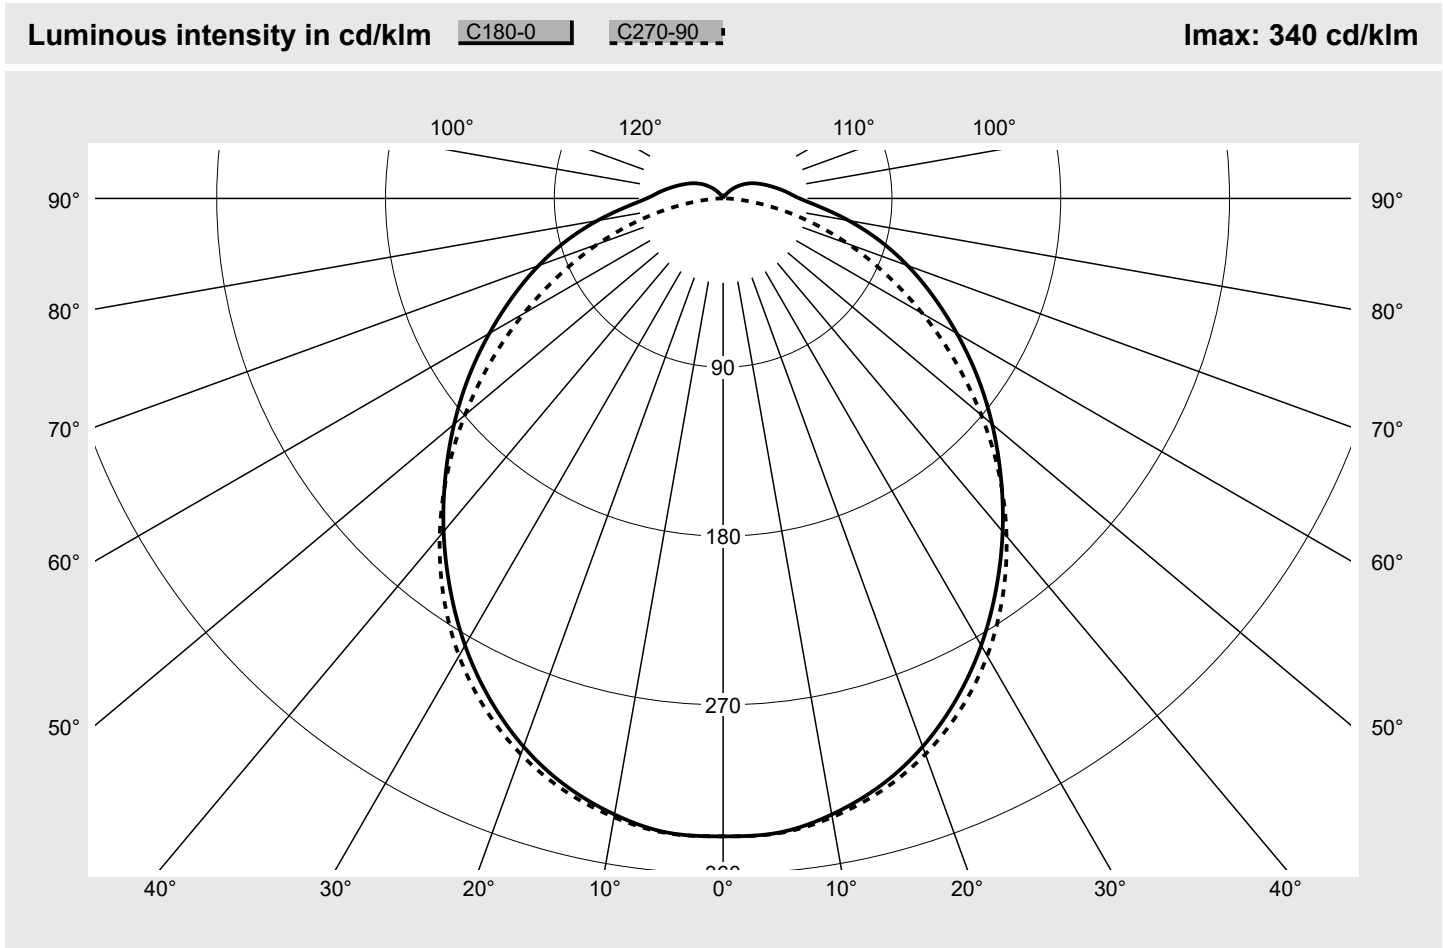

Classifications		Luminaire light output ratios	
DIN 5040	A 4 1	η_{LB}	100.0%
CIE	N1=47 N2=77 N3=93	ϕ_u	94.2%
	N4=94 N5=100	ϕ_o	5.8%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Monsun® 21	Order number: 51FB10DP468C2 EAN: 4069025178084	LP number 58939_137
Table of values for luminous intensities		Maximum luminous intensity

sitEco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	340.1	340.1	340.1	340.1	340.1	340.1	340.1	2.0	2.0
5°	339.4	338.3	336.5	337.9	339.5	339.4	339.8	16.2	18.2
10°	333.5	333.0	331.2	332.8	334.6	334.7	335.0	31.7	49.9
15°	324.2	324.2	322.5	324.2	326.1	326.4	326.9	46.1	96.0
20°	311.0	311.6	310.1	311.9	314.1	314.7	315.3	58.6	154.6
25°	294.4	295.4	294.1	296.0	298.4	299.4	300.2	68.7	223.4
30°	275.2	276.6	275.1	276.8	279.4	280.7	281.6	76.1	299.5
35°	253.9	255.2	253.8	254.9	257.1	258.4	259.7	80.5	380.0
40°	231.8	232.9	231.3	231.1	232.5	233.8	235.1	81.9	461.9
45°	209.4	209.9	207.8	205.9	206.1	206.6	208.2	80.4	542.4
50°	187.2	187.1	184.8	181.3	179.3	178.3	179.7	76.6	619.0
55°	165.5	164.8	162.1	157.0	153.1	150.2	150.9	70.7	689.7
60°	143.9	142.9	139.5	133.7	127.9	123.2	122.7	63.3	753.0
65°	123.6	122.5	117.8	111.0	104.2	97.9	96.0	54.9	808.0
70°	104.7	103.3	97.1	89.4	81.7	74.3	71.0	45.8	853.8
75°	86.1	84.4	77.8	69.2	60.2	52.2	47.8	36.3	890.0
80°	68.0	66.1	60.2	50.5	40.7	32.1	26.9	26.7	916.7
85°	51.8	50.0	44.6	35.3	24.7	15.7	10.1	18.3	935.0
90°	40.8	39.2	34.4	26.0	15.9	6.9	1.8	13.1	948.2
95°	34.8	33.5	29.7	22.7	13.6	5.1	1.6	11.2	959.3
100°	29.9	28.8	25.4	19.2	11.3	3.7	1.4	9.4	968.7
105°	25.7	24.7	21.4	16.1	8.8	2.4	1.2	7.7	976.4
110°	22.1	20.9	18.0	13.0	6.6	1.4	1.1	6.1	982.5
115°	19.0	17.8	15.0	10.4	4.7	1.2	1.1	4.9	987.4
120°	16.0	14.8	12.2	7.9	3.1	1.2	1.0	3.8	991.2
125°	13.0	11.9	9.4	5.6	1.7	1.1	0.9	2.7	993.9
130°	10.1	9.1	6.9	3.7	1.4	1.1	1.0	1.9	995.9
135°	7.3	6.5	4.6	2.1	1.4	1.1	1.1	1.3	997.1
140°	4.8	4.1	2.7	1.7	1.4	1.1	1.1	0.8	998.0
145°	2.6	2.3	1.9	1.7	1.4	1.2	1.2	0.5	998.5
150°	2.0	2.0	1.9	1.6	1.3	1.3	1.3	0.4	998.9
155°	1.9	1.9	1.7	1.6	1.4	1.4	1.4	0.4	999.3
160°	1.7	1.7	1.6	1.4	1.4	1.4	1.4	0.3	999.6
165°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.2	999.8
170°	1.3	1.4	1.4	1.4	1.4	1.4	1.4	0.1	999.9
175°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.1	1000.0
180°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.0	1000.0

Photometric test report

Family Monsun® 21	Order number: 51FB10DP468C2 EAN: 4069025178084	LP number 58939_137
UGR-Table	Standard room	siteco

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	20.1	21.8	20.4	22.1	22.4	20.1	21.8	20.4	22.1	22.4
	3H	21.8	23.4	22.2	23.7	24.0	21.4	23.0	21.8	23.3	23.7
	4H	22.6	24.1	23.0	24.4	24.8	22.0	23.4	22.4	23.8	24.1
	6H	23.4	24.7	23.8	25.1	25.5	22.3	23.7	22.7	24.1	24.4
	8H	23.8	25.0	24.2	25.4	25.8	22.5	23.7	22.9	24.1	24.5
	12H	24.1	25.3	24.5	25.7	26.1	22.5	23.7	22.9	24.1	24.5
4H	2H	20.8	22.2	21.2	22.6	23.0	20.8	22.2	21.2	22.6	22.9
	3H	22.7	24.0	23.1	24.3	24.8	22.3	23.6	22.8	24.0	24.4
	4H	23.7	24.8	24.1	25.2	25.6	23.0	24.1	23.4	24.5	24.9
	6H	24.6	25.6	25.0	26.0	26.5	23.5	24.5	23.9	24.9	25.3
	8H	25.0	25.9	25.5	26.4	26.8	23.6	24.5	24.1	25.0	25.4
	12H	25.4	26.2	25.9	26.7	27.2	23.7	24.5	24.2	25.0	25.5
8H	4H	24.0	24.9	24.5	25.4	25.8	23.4	24.3	23.9	24.7	25.2
	6H	25.1	25.9	25.6	26.3	26.8	24.0	24.8	24.5	25.2	25.7
	8H	25.6	26.3	26.1	26.8	27.3	24.2	24.9	24.7	25.4	25.9
	12H	26.2	26.8	26.7	27.2	27.8	24.4	25.0	24.9	25.5	26.0
12H	4H	24.0	24.9	24.5	25.3	25.8	23.5	24.3	24.0	24.8	25.2
	6H	25.2	25.8	25.7	26.3	26.8	24.2	24.8	24.7	25.3	25.8
	8H	25.8	26.4	26.3	26.8	27.4	24.4	25.0	24.9	25.5	26.0

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:	L = 1590 B = 87	H(C0) = 21 H(C90) = 21	H(C180) = 21 H(C270) = 21
C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45°	10449.2	10514.0	10590.9	10812.3	11279.0	11903.7	12729.5
50°	9910.4	9947.1	10021.4	10174.3	10559.1	11152.3	12057.1
55°	9397.4	9408.4	9466.0	9540.6	9838.0	10356.4	11309.9
60°	8890.5	8883.0	8898.4	8926.7	9122.7	9550.8	10512.6
65°	8444.8	8424.5	8353.2	8300.2	8416.7	8738.9	9677.6
70°	8062.1	8016.6	7808.5	7661.0	7674.7	7883.8	8780.5
75°	7663.1	7590.8	7299.5	7003.5	6829.7	6900.2	7714.1
80°	7240.2	7120.0	6828.2	6301.9	5863.0	5667.9	6308.3
85°	6931.7	6784.9	6467.7	5807.7	4936.7	4230.0	4405.6

Photometric test report

Family
Monsun® 21

Order number: 51FB10DP468C2
EAN: 4069025178084

LP number
58939_137

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

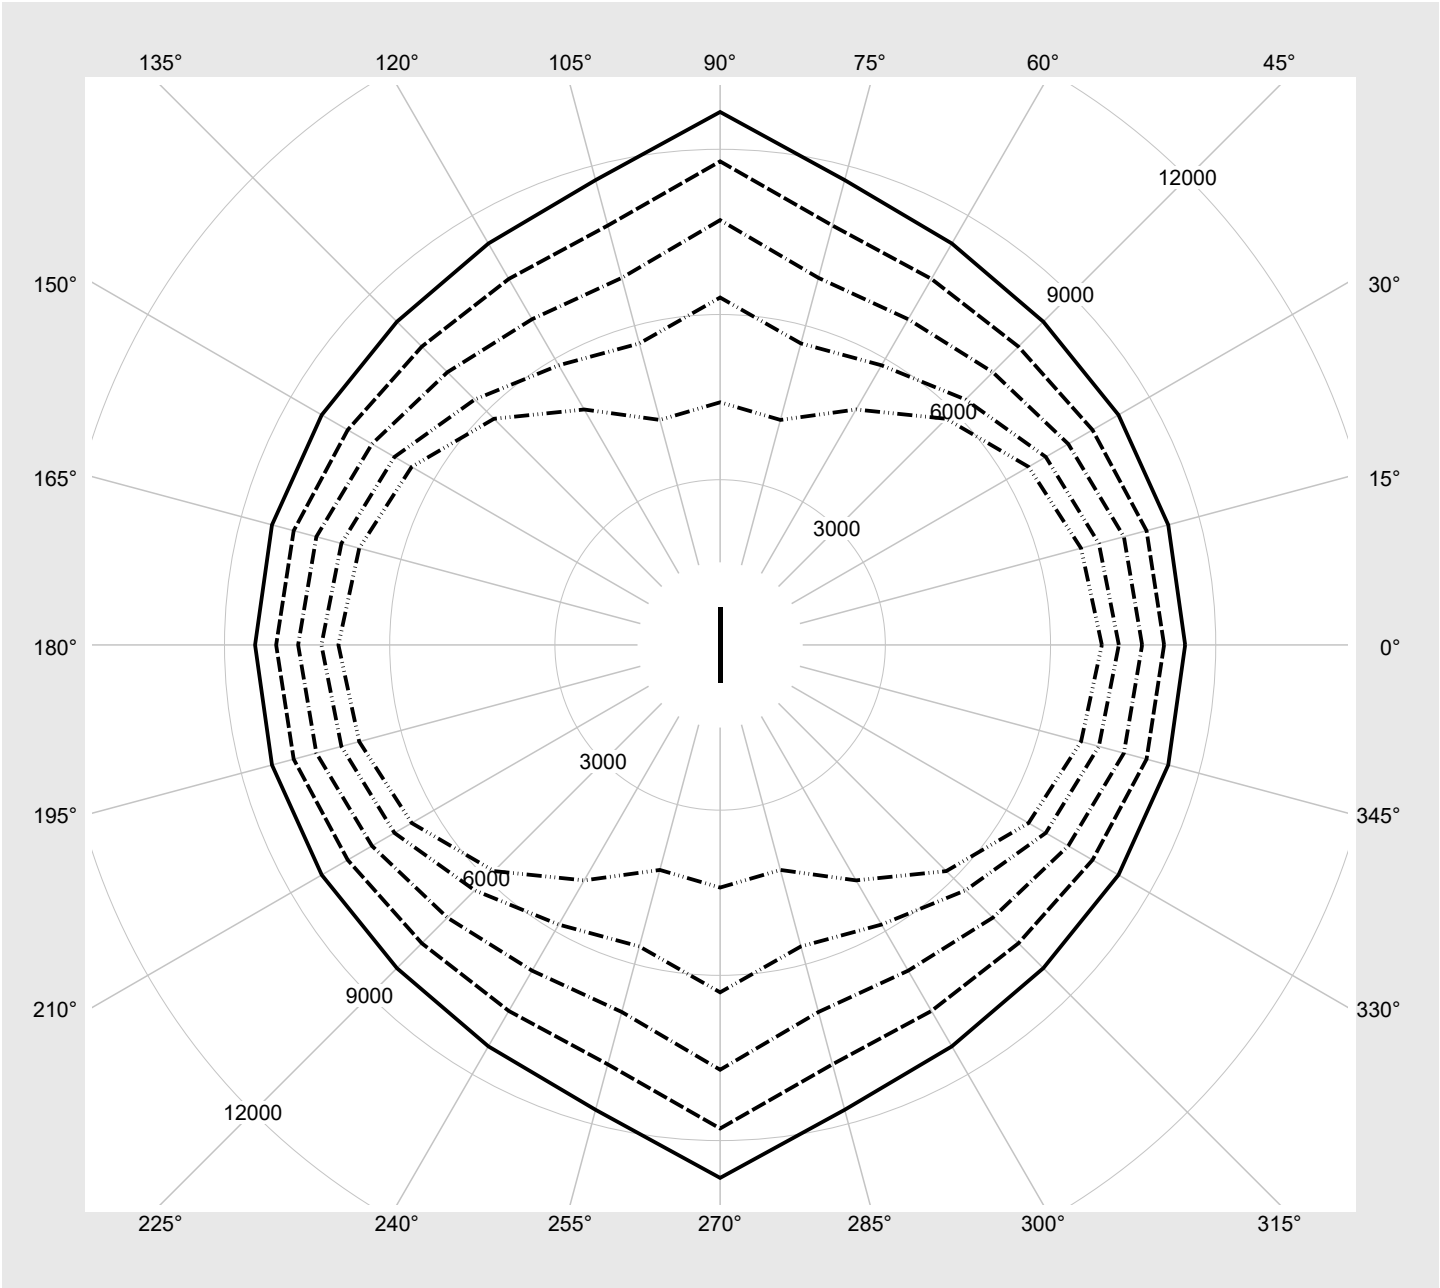

Photometric test report

Family Monsun® 21	Order number: 51FB10DP468C2 EAN: 4069025178084	LP number 58939_137
Dimming levels table environmental temperature: 25°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	6060	32.7
95	241	252	5763	31.1
90	228	250	5464	29.6
85	214	248	5140	28.0
80	201	245	4837	26.5
75	189	243	4556	25.2
70	176	241	4251	23.6
65	163	238	3944	22.1
60	150	235	3636	20.5
55	137	231	3326	18.9
50	125	228	3038	17.4
45	112	224	2726	15.7
40	99	219	2412	14.0
35	87	215	2121	12.4
30	74	209	1808	10.7
25	62	202	1515	9.2
20	50	194	1221	7.6
15	37	183	901	6.1
10	25	169	605	4.6
5	13	145	308	3.4
3	8	127	184	3.1