


Photometric test report

Family Floodlight FL11	Order number: 5XA779128Q02FB EAN: 4069025140500		LP number 59465_138
	Version	standard bracket	serial documentation 09.08.2024
	Optic	symmetric distribution RS4	
	Cover	toughened safety glass	siteco
	Lamps	LED 5700 K CRI ≥ 80	
	Controlgear	ECG-DALI	
	Rated values	Ta = 10 °C Net luminous flux = 169650 lm Power consumption = 1368.3 W Luminous efficacy = 124 lm/W	

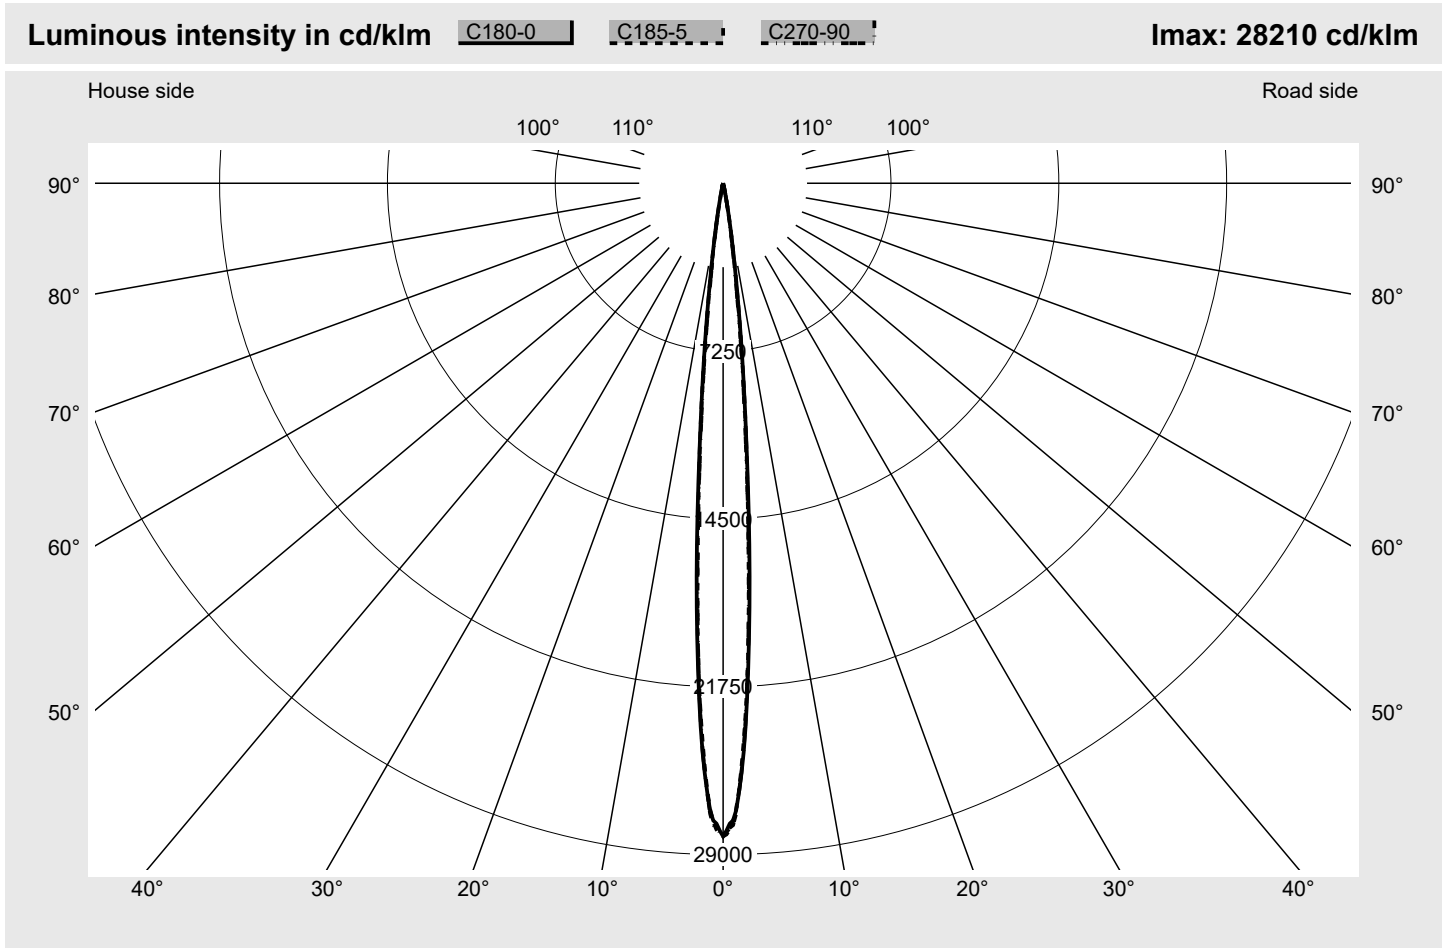

Luminaire output ratios		Luminous intensity class acc. to EN13201-2	
Eta	100.0%	Class:	G6
Eta 0° - 90°	100.0%	Imax 70°	14.0
Eta 90° - 180°	0.0%	Imax 80°	6.3
		Imax 90°	0.0
		Imax >90°	0.0
		Imax >95°	0.0
Measurement conditions			
DIN EN 13032 and DIN 5032			

Photometric test report

Family
Floodlight FL11


Order number: 5XA779128Q02FB
EAN: 4069025140500

LP number
59465_138

Envelope curve in cd/klm

KMK 0°

siteco

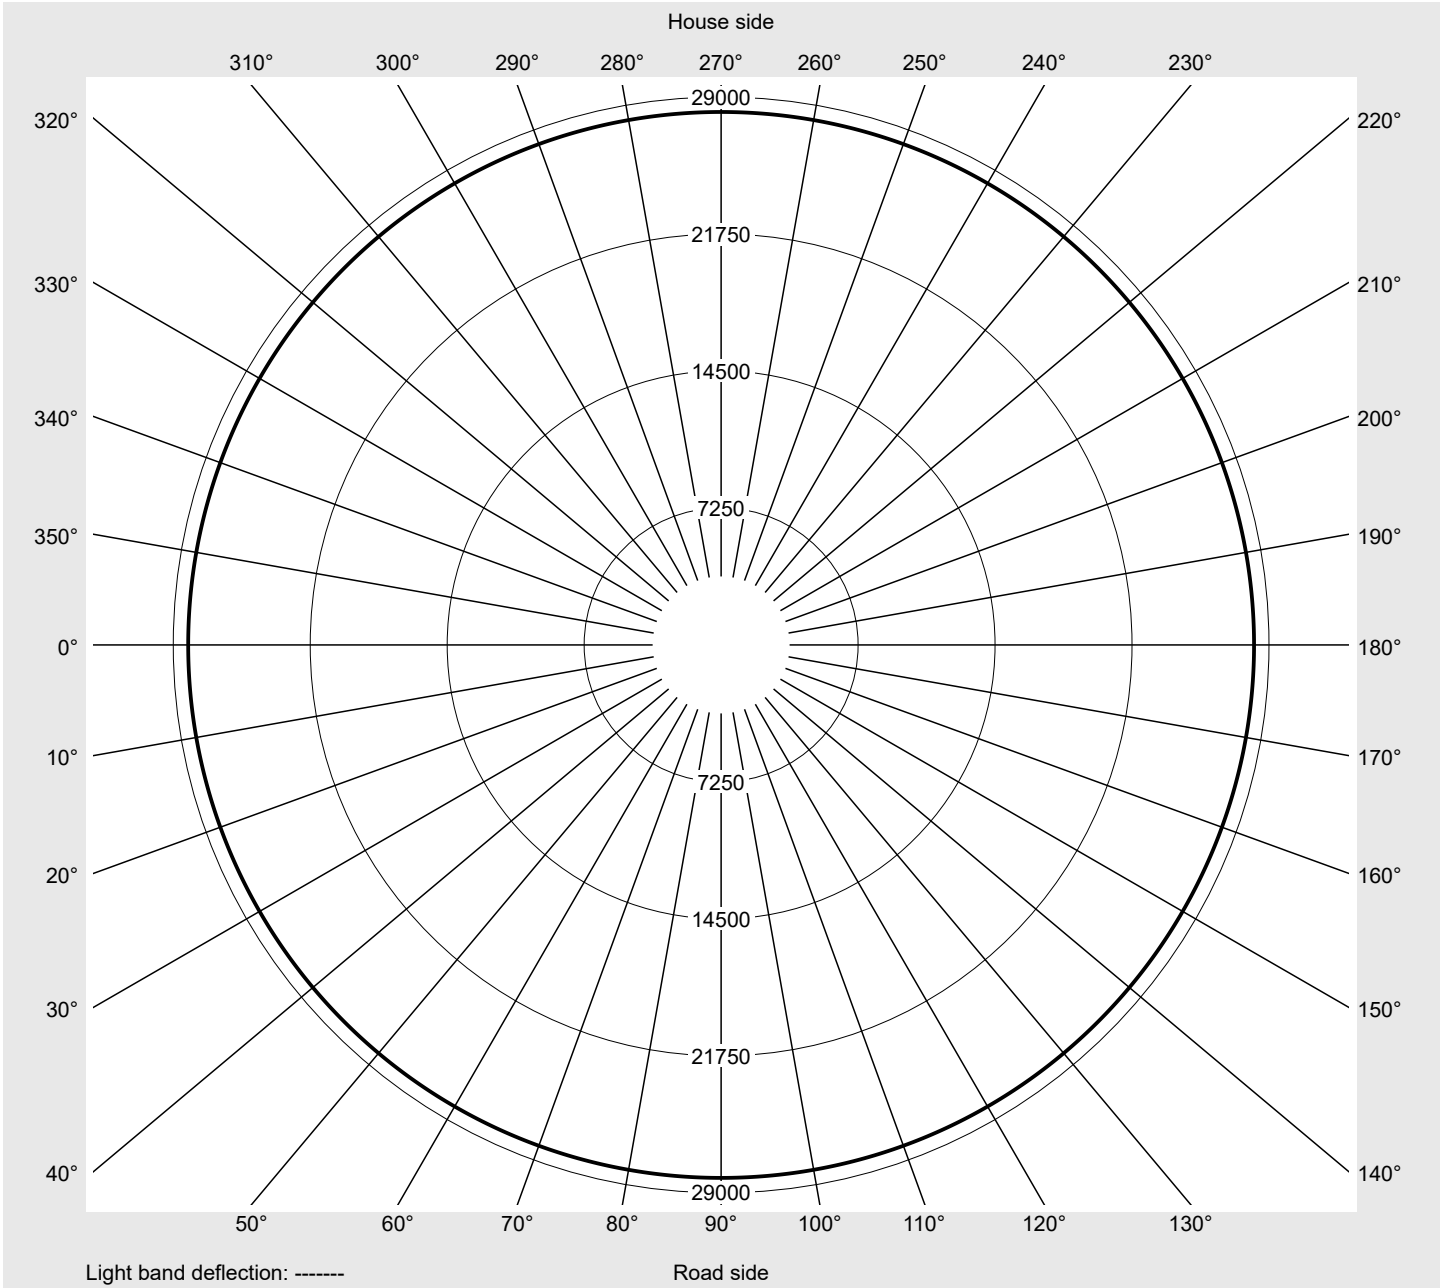

Photometric test report

Family Floodlight FL11	Order number: 5XA779128Q02FB EAN: 4069025140500	LP number 59465_138
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	0° 180°	5° 175° 185° 355°	10° 170° 190° 350°	15° 165° 195° 345°	20° 160° 200° 340°	25° 155° 205° 335°	30° 150° 210° 330°	35° 145° 215° 325°	40° 140° 220° 320°	45° 135° 225° 315°
		Luminous intensity in cd/klm								
γ										
0,0°	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3
0,5°	27726.4	27992.9	27732.1	27998.7	27737.9	27998.7	27806.6	28024.5	27769.4	28041.7
1,0°	27422.6	27414.0	27448.4	27422.6	27457.0	27425.5	27474.2	27448.4	27497.1	27459.9
1,5°	26299.1	26233.2	26310.6	26230.3	26293.4	26233.2	26307.7	26247.5	26304.8	26241.8
2,0°	24825.9	24522.1	24828.8	24519.3	24814.5	24522.1	24817.3	24530.7	24820.2	24507.8
3,0°	20807.7	20566.9	20773.3	20544.0	20764.7	20532.6	20779.0	20509.6	20704.5	20446.6
4,0°	16330.9	15663.1	16276.4	15645.9	16276.4	15654.5	16279.3	15640.2	16219.1	15562.8
5,0°	11768.1	11581.8	11791.0	11587.5	11822.6	11636.3	11854.1	11639.1	11831.2	11587.5
6,0°	8292.1	8219.9	8314.2	8256.9	8373.5	8328.5	8438.6	8383.8	8459.2	8324.2
7,0°	5582.5	5471.9	5600.0	5524.1	5688.9	5639.0	5786.3	5693.7	5780.9	5655.3
8,0°	3591.2	3538.2	3625.9	3604.7	3746.5	3755.1	3895.3	3890.4	3964.4	3889.8
9,0°	2245.3	2224.9	2278.2	2284.3	2371.7	2403.5	2516.7	2564.6	2651.1	2631.9
10,0°	1313.2	1276.5	1338.2	1349.3	1427.9	1501.0	1557.7	1589.8	1666.3	1658.6
15,0°	153.9	151.5	153.7	151.9	156.5	156.8	163.2	163.9	170.4	168.4
20,0°	72.2	70.0	71.4	68.3	69.2	66.5	67.8	65.4	67.4	65.1
30,0°	34.1	34.1	34.1	33.8	33.0	33.3	33.6	33.3	33.1	33.0
45,0°	34.6	33.0	33.8	34.0	33.6	32.5	32.0	31.3	31.1	31.4
60,0°	22.8	23.3	24.9	26.3	21.8	19.9	18.9	18.6	19.2	19.1
75,0°	10.0	9.2	8.5	8.2	8.6	8.9	8.8	8.1	8.3	8.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779128Q02FB EAN: 4069025140500	LP number 59465_138
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	50° 130° 230° 310°	55° 125° 235° 305°	60° 120° 240° 300°	65° 115° 245° 295°	70° 110° 250° 290°	75° 105° 255° 285°	80° 100° 260° 280°	85° 95° 265° 275°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm									Luminous flux in lm/klm	
0,0°	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	28210.3	1.7	1.7
0,5°	27786.6	28067.5	27806.6	28093.3	27849.6	28119.0	27869.7	28127.6	27881.2	13.4	15.0
1,0°	27508.6	27479.9	27534.4	27500.0	27563.0	27520.0	27586.0	27525.8	27606.0	26.3	41.4
1,5°	26276.2	26244.6	26313.4	26250.4	26299.1	26253.2	26310.6	26244.6	26310.6	37.7	79.1
2,0°	24780.1	24487.7	24794.4	24464.8	24774.3	24447.6	24765.7	24433.3	24757.1	75.2	154.2
3,0°	20650.1	20377.8	20578.4	20309.0	20532.6	20248.8	20483.8	20223.0	20498.2	117.9	272.1
4,0°	16150.3	15462.5	16024.2	15319.2	15909.6	15175.9	15815.0	15135.7	15809.3	120.8	392.9
5,0°	11742.3	11438.5	11553.1	11243.6	11372.6	11108.9	11240.7	11011.5	11229.3	110.2	503.1
6,0°	8299.9	8174.0	8239.1	7966.3	8043.3	7775.1	7897.2	7682.8	7869.1	93.8	596.9
7,0°	5698.3	5534.7	5550.7	5338.6	5313.1	5085.6	5105.3	4937.1	5017.9	73.3	670.2
8,0°	3904.7	3783.2	3740.8	3552.5	3466.2	3283.9	3249.3	3152.1	3198.0	55.5	725.6
9,0°	2617.3	2503.8	2416.7	2267.6	2190.8	2085.1	2056.4	2005.7	2022.3	40.2	765.9
10,0°	1658.6	1560.9	1502.1	1391.0	1340.3	1263.2	1226.7	1184.2	1181.6	89.8	855.6
15,0°	168.9	158.6	154.8	146.8	144.7	139.0	139.0	135.4	137.1	21.8	877.4
20,0°	66.6	64.0	65.5	63.5	65.0	63.1	65.0	63.3	65.2	19.8	897.2
30,0°	33.1	33.2	33.5	33.1	32.6	32.6	32.6	32.7	32.7	23.6	920.8
45,0°	31.1	30.9	31.1	31.2	31.6	31.8	31.5	30.8	31.6	37.1	957.9
60,0°	19.1	18.6	18.5	18.2	18.0	21.1	20.5	19.4	19.2	28.9	986.8
75,0°	8.0	7.6	8.3	8.3	8.0	7.6	7.7	8.2	8.7	13.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779128Q02FB EAN: 4069025140500	LP number 59465_138
Dimming levels table environmental temperature: 10°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
100	253	254	169252	1363.6
95	235	251	161303	1272.2
90	220	249	152546	1179.6
85	204	246	143991	1092.6
80	189	243	135642	1011.1
75	174	240	126981	930.3
70	160	237	118650	855.8
65	146	234	109871	780.0
60	133	230	101535	711.1
55	121	227	93528	647.3
50	108	223	84630	578.7
45	96	218	76075	515.4
40	85	214	67935	456.9
35	73	208	59450	397.6
30	62	202	51006	340.5
25	51	195	42500	284.6
20	40	186	33877	234.2
15	30	176	25474	180.4
10	19	159	16737	122.4
5	10	136	8659	69.9
1	3	91	2491	31.5

Dimming levels table

environmental temperature: 25°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
95	----	----	----	----
90	----	----	----	----
85	202	246	139204	1074.7
80	187	243	131145	992.7
75	172	240	122927	913.4
70	158	237	114873	839.1
65	144	233	106298	762.8
60	131	230	98336	695.2
55	118	226	89909	626.6
50	106	222	81862	563.5
45	94	218	73737	502.2
40	83	213	65586	442.9
35	71	207	57273	384.3
30	60	201	48911	327.2
25	50	195	41190	276.3
20	39	186	32730	226.9
15	29	175	24463	173.2
10	19	159	16645	121.3
5	10	136	8622	69.3
2	3	92	2483	31.2

Photometric test report

Family Floodlight FL11	Order number: 5XA779128Q02FB EAN: 4069025140500	LP number 59465_138
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
10.0	169650.0	1368.3
25.0	140090.0	1084.1