


Photometric test report


Family Floodlight FL11	Order number: 5XA779617X51AB EAN: 4069025142689		LP number 59552_106
	Version	standard bracket	serial documentation 09.08.2024
	Optic	asymmetric distribution PL33T with Back Light Control	
	Cover	toughened safety glass	siteco
	Lamps	LED 5000 K CRI ≥ 70	
	Controlgear	ECG-DALI	
	Rated values	Ta = 0 °C	
		Net luminous flux = 122980 lm	
		Power consumption = 1188.4 W	
		Luminous efficacy = 103.5 lm/W	

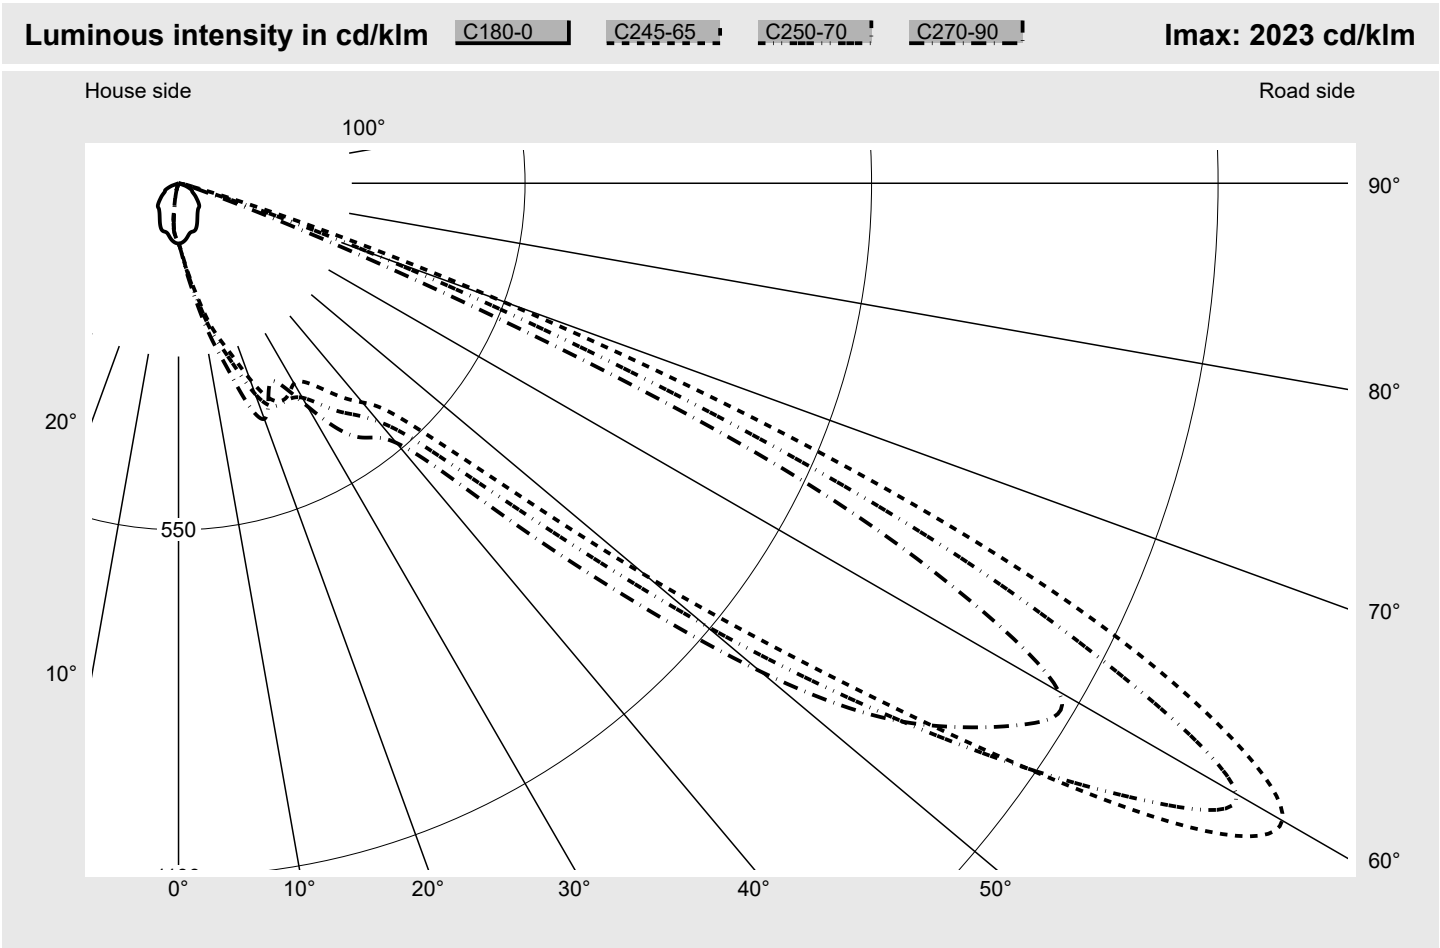

Luminaire output ratios		Luminous intensity class acc. to EN13201-2	
Eta	100.0%	Class:	G3
Eta 0° - 90°	100.0%	Imax 70°	555.3
Eta 90° - 180°	0.0%	Imax 80°	11.9
		Imax 90°	0.0
		Imax >90°	0.0
		Imax >95°	0.0
Measurement conditions			
DIN EN 13032 and DIN 5032			

Photometric test report

Family Floodlight FL11	Order number: 5XA779617X51AB EAN: 4069025142689	LP number 59552_106
Envelope curve in cd/klm	KMK 60° KMK 57.5° KMK 55° KMK 52.5°	sit eco

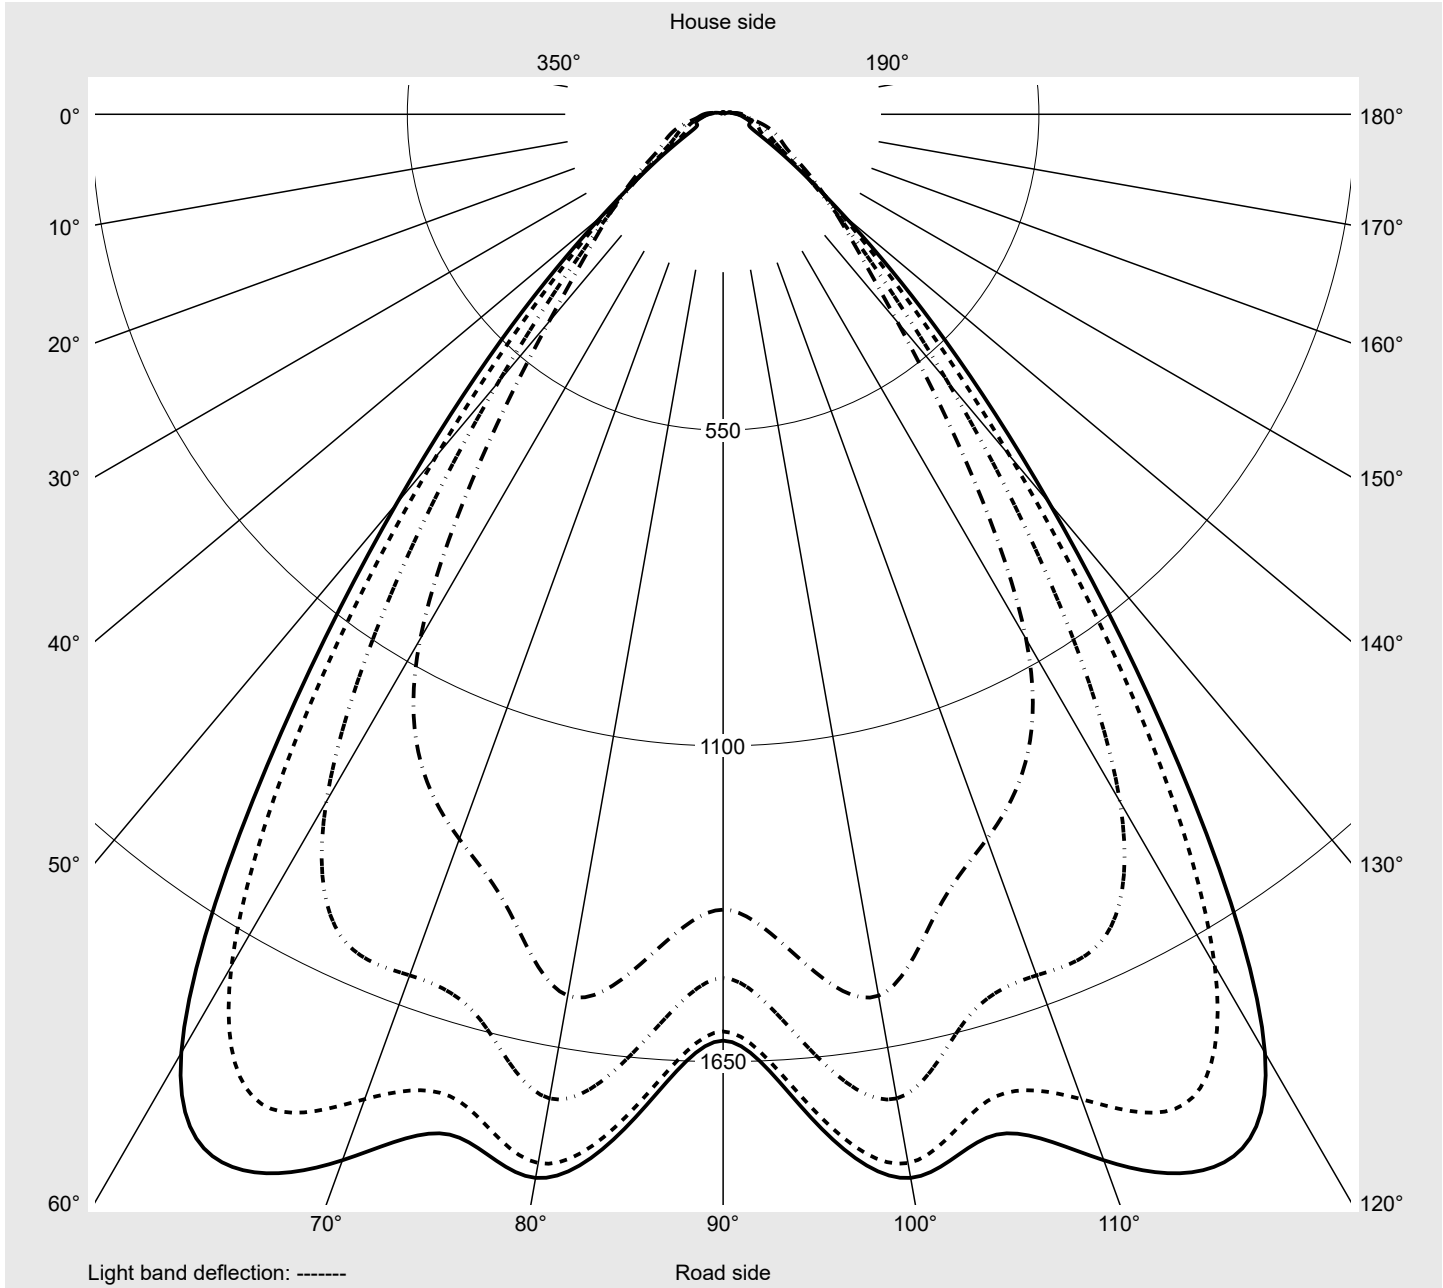

Photometric test report

Family Floodlight FL11		Order number: 5XA779617X51AB EAN: 4069025142689										LP number 59552_106	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5
2,5°	94.9	95.1	96.2	97.4	98.7	100.0	101.3	102.5	103.7	104.9	106.1	107.2	108.2
5,0°	92.9	94.1	96.5	99.1	101.9	105.1	108.5	112.1	115.8	119.4	122.8	126.1	129.2
7,5°	89.6	91.7	95.3	99.5	104.6	110.3	116.4	122.5	128.8	135.2	141.4	147.7	153.3
10,0°	85.3	88.2	93.2	99.7	107.2	115.3	123.7	132.3	141.2	151.1	161.1	171.3	181.3
12,5°	81.4	85.5	92.1	100.5	109.7	119.7	130.4	142.6	155.6	169.6	184.6	199.3	214.2
15,0°	80.0	85.8	94.3	104.4	114.9	126.4	140.3	156.1	173.8	193.0	211.9	228.4	243.5
17,5°	79.9	87.6	98.4	110.1	122.0	136.6	153.6	172.7	192.5	211.0	228.3	246.4	266.9
20,0°	78.4	87.8	100.5	114.2	129.7	148.2	168.9	189.8	207.9	225.3	246.3	271.3	300.7
22,5°	74.7	85.7	100.2	117.0	137.8	161.0	183.4	203.6	224.9	249.5	278.2	308.8	340.0
25,0°	69.8	81.5	97.2	117.7	143.2	168.1	190.1	215.3	243.0	274.3	308.6	339.3	365.4
27,5°	64.6	75.9	92.4	116.7	146.1	172.4	200.1	232.6	264.3	294.6	321.2	341.9	361.1
30,0°	60.0	70.6	88.4	117.6	151.0	183.3	218.3	257.9	288.5	303.1	310.4	320.4	340.0
32,5°	56.2	66.8	86.9	121.5	159.4	198.1	242.6	290.3	311.0	304.6	295.6	304.3	335.0
35,0°	53.4	64.6	87.2	121.2	163.4	211.4	264.4	309.9	316.0	300.7	293.9	312.3	353.0
37,5°	51.2	64.5	85.1	114.4	163.4	220.4	274.9	303.6	301.2	295.9	301.3	326.5	377.6
40,0°	50.2	64.4	80.3	109.5	160.7	219.2	266.0	276.8	283.6	300.2	315.2	342.8	395.9
42,5°	48.7	63.2	77.3	110.4	162.0	212.2	245.7	253.1	280.4	311.7	330.6	358.7	415.7
45,0°	45.3	60.5	74.0	109.5	158.2	193.8	215.1	238.0	286.5	321.9	342.6	384.6	471.8
47,5°	41.2	55.5	66.2	99.4	140.4	164.7	185.9	226.5	280.1	321.5	356.5	444.4	591.0
50,0°	37.3	48.0	58.4	87.0	116.9	136.3	160.4	207.7	260.3	316.2	394.3	561.6	793.7
52,5°	33.8	41.1	51.6	74.9	95.6	112.8	135.7	183.4	244.2	326.9	472.6	736.5	1055.3
55,0°	29.9	36.4	45.6	64.2	78.8	91.2	111.3	158.3	238.2	366.9	608.8	990.5	1382.4
57,5°	26.4	33.2	42.1	56.2	65.5	72.4	95.1	156.0	263.2	448.0	777.4	1252.6	1712.6
60,0°	24.7	31.8	39.1	47.7	48.9	51.7	77.0	142.7	275.1	520.5	884.1	1384.8	1887.5
62,5°	23.9	29.7	35.4	38.9	34.8	37.6	60.5	121.7	256.3	497.9	841.5	1324.2	1876.0
65,0°	20.0	24.7	30.4	33.6	26.6	27.4	47.5	97.4	195.0	387.8	667.7	1054.4	1586.9
67,5°	15.3	20.0	25.2	23.9	17.3	18.9	30.0	58.8	119.5	239.3	427.2	690.4	1052.9
70,0°	10.8	15.1	19.9	16.4	11.8	10.8	15.6	32.7	72.2	146.6	268.8	415.2	555.3
72,5°	7.1	10.6	13.8	9.8	6.8	6.6	9.5	18.7	41.9	83.9	143.4	210.1	267.5
75,0°	4.2	6.7	6.9	5.1	3.9	4.4	6.7	10.9	21.3	43.9	73.5	88.1	92.5
77,5°	2.7	4.3	3.1	2.5	2.1	2.6	4.1	6.5	11.6	10.8	10.2	10.4	11.7
80,0°	1.3	1.9	1.3	1.0	0.9	1.4	2.5	3.2	3.6	3.8	4.0	4.6	6.1
82,5°	0.5	0.6	0.5	0.4	0.4	0.8	1.3	1.5	1.6	1.8	2.0	2.3	2.9
85,0°	0.4	0.4	0.4	0.3	0.2	0.4	0.6	0.7	0.7	0.8	0.9	1.0	1.1
87,5°	0.2	0.2	0.2	0.1	0.1	0.1	0.2	0.2	0.3	0.3	0.4	0.4	0.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779617X51AB EAN: 4069025142689	LP number 59552_106
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5
2,5°	109.3	109.9	110.5	111.0	111.2	111.3	93.3	92.6	91.8	91.1	90.5	89.8	89.3
5,0°	132.1	134.7	136.4	137.8	138.8	139.3	90.5	89.0	87.5	86.2	85.0	84.0	82.9
7,5°	158.8	163.8	167.5	170.6	172.4	173.0	86.8	84.6	82.7	81.0	79.2	77.4	75.6
10,0°	191.1	199.5	206.7	212.1	215.3	216.1	82.0	79.5	77.1	74.6	72.2	69.6	66.7
12,5°	228.1	239.7	249.1	255.9	259.8	261.6	77.7	74.9	71.9	68.8	65.5	61.3	55.2
15,0°	258.2	272.7	286.2	297.9	310.0	308.4	74.9	71.2	67.1	63.1	57.8	50.4	42.5
17,5°	289.6	311.9	333.0	351.5	364.1	368.7	73.0	68.0	62.9	57.3	49.3	40.4	32.1
20,0°	330.2	356.3	375.0	388.5	395.9	398.0	69.9	63.4	56.9	49.1	39.9	30.8	24.7
22,5°	366.7	382.4	385.6	381.7	376.1	372.4	65.2	57.4	49.0	39.6	31.0	24.2	20.9
25,0°	381.5	385.8	377.8	364.8	353.0	347.6	59.3	50.2	39.7	30.3	24.2	20.2	12.5
27,5°	378.0	385.2	381.5	374.3	367.8	366.1	54.0	43.5	31.6	24.0	20.5	13.5	10.4
30,0°	366.9	393.0	405.7	407.0	407.2	408.3	49.9	38.4	25.1	20.4	16.8	10.8	9.6
32,5°	374.5	415.0	442.0	451.1	453.3	456.5	46.8	34.3	20.9	18.2	12.4	9.9	8.8
35,0°	398.7	441.7	472.8	485.0	487.9	490.9	44.1	30.6	18.4	16.2	11.0	9.3	7.9
37,5°	428.7	463.9	492.4	505.1	507.0	508.7	41.7	27.4	16.7	13.2	10.3	8.3	7.2
40,0°	454.1	493.9	515.9	532.4	536.8	537.9	38.9	24.3	15.6	11.9	9.5	7.4	6.8
42,5°	489.2	550.5	586.8	619.0	623.4	622.3	35.5	20.4	14.0	11.4	8.8	7.1	6.6
45,0°	576.4	669.3	735.8	795.0	792.8	786.0	32.2	16.7	12.3	11.3	8.4	6.6	6.1
47,5°	733.6	852.2	946.3	1030.3	1010.7	986.2	29.1	14.5	12.0	11.0	7.9	5.9	5.3
50,0°	969.9	1092.1	1200.2	1308.1	1257.4	1205.0	26.9	14.0	12.7	11.1	7.6	5.2	4.6
52,5°	1245.8	1343.3	1437.7	1558.8	1471.9	1385.3	24.6	14.9	13.8	10.9	7.1	4.4	4.1
55,0°	1577.6	1596.0	1633.0	1740.5	1624.7	1504.5	22.4	14.8	12.9	10.2	5.4	3.9	3.7
57,5°	1901.9	1825.5	1779.0	1854.7	1733.5	1597.4	20.0	14.4	11.6	8.8	4.0	3.5	3.4
60,0°	2022.8	1938.6	1839.7	1881.0	1753.9	1613.4	18.1	14.8	10.3	6.6	3.5	3.2	3.0
62,5°	1861.2	1678.3	1551.2	1598.4	1499.9	1383.8	16.1	14.5	8.7	4.0	3.1	2.8	2.6
65,0°	1528.6	1268.7	1152.1	1165.0	1093.8	1008.1	13.1	13.4	6.7	3.1	2.6	2.3	2.2
67,5°	1045.8	751.9	631.8	585.7	520.1	465.0	9.9	10.0	3.9	2.4	2.0	1.9	2.1
70,0°	540.3	336.9	231.7	193.6	156.7	132.9	7.1	6.6	2.5	1.8	1.6	1.6	1.9
72,5°	188.4	85.8	58.9	49.2	41.0	36.1	4.3	3.3	1.9	1.4	1.3	1.4	1.7
75,0°	40.5	29.7	31.6	30.9	24.4	21.3	2.4	2.0	1.3	1.1	1.1	1.2	1.4
77,5°	15.4	17.6	18.3	19.8	14.5	12.2	1.5	1.2	0.9	0.8	0.8	0.9	1.2
80,0°	8.9	9.5	9.4	11.9	8.5	7.0	0.8	0.7	0.5	0.5	0.5	0.7	0.9
82,5°	3.8	4.3	4.1	5.6	4.2	3.3	0.4	0.4	0.3	0.3	0.3	0.5	0.7
85,0°	1.4	1.4	1.3	1.6	1.4	1.2	0.3	0.3	0.2	0.2	0.3	0.3	0.4
87,5°	0.4	0.4	0.4	0.4	0.4	0.4	0.2	0.2	0.1	0.1	0.1	0.2	0.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11		Order number: 5XA779617X51AB EAN: 4069025142689										LP number 59552_106	
Table of values for luminous intensities										Maximum luminous intensity		sīteco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm		
0,0°	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	0.1	0.1
2,5°	88.8	88.4	87.9	87.7	87.4	87.2	87.1	86.9	86.8	86.8	86.7	1.2	1.3
5,0°	82.0	81.1	80.2	79.5	78.7	78.0	77.4	77.0	76.7	76.5	76.4	2.4	3.7
7,5°	73.7	71.9	69.7	67.6	65.2	62.9	60.8	59.3	58.0	57.3	57.0	3.7	7.4
10,0°	62.9	58.0	52.9	48.1	43.7	40.2	37.5	35.4	34.0	33.2	32.9	5.0	12.3
12,5°	48.5	41.5	35.6	30.9	27.6	25.6	24.4	23.7	23.3	23.2	23.1	6.5	18.8
15,0°	35.0	29.2	25.3	23.6	22.8	21.8	19.4	16.8	14.8	13.7	13.9	8.3	27.1
17,5°	26.3	23.7	22.1	17.2	13.0	11.5	10.9	10.6	10.3	10.2	10.2	10.3	37.4
20,0°	22.3	16.7	11.8	10.7	10.2	9.8	9.5	9.3	9.1	9.1	9.0	12.4	49.8
22,5°	13.5	10.8	10.0	9.5	9.1	8.9	8.6	8.4	8.3	8.2	8.2	14.4	64.2
25,0°	10.4	9.6	9.0	8.6	8.3	8.1	7.9	7.8	7.7	7.6	7.6	16.0	80.2
27,5°	9.5	8.7	8.2	7.9	7.6	7.5	7.4	7.3	7.2	7.2	7.1	17.7	97.9
30,0°	8.7	8.0	7.6	7.3	7.1	7.0	6.9	6.8	6.8	6.7	6.7	19.6	117.4
32,5°	7.8	7.4	7.0	6.8	6.6	6.5	6.3	6.2	6.1	6.0	6.0	21.9	139.4
35,0°	7.2	6.9	6.6	6.3	6.1	5.9	5.8	5.6	5.5	5.5	5.5	24.4	163.8
37,5°	6.8	6.4	6.1	5.8	5.5	5.4	5.3	5.2	5.1	5.0	5.0	26.5	190.2
40,0°	6.4	6.0	5.6	5.3	5.2	5.1	5.0	5.0	4.9	4.8	4.8	28.6	218.8
42,5°	6.1	5.7	5.4	5.1	4.9	5.0	4.9	4.8	4.6	4.5	4.5	31.9	250.7
45,0°	5.6	5.2	5.0	4.8	4.7	4.8	4.7	4.5	4.4	4.3	4.2	37.7	288.5
47,5°	5.0	4.7	4.5	4.4	4.4	4.4	4.4	4.3	4.2	4.2	4.1	45.9	334.4
50,0°	4.4	4.3	4.2	4.1	4.1	4.2	4.2	4.2	4.1	4.1	4.1	56.8	391.1
52,5°	4.0	4.0	3.9	3.9	4.0	4.0	4.0	4.0	4.0	4.0	4.0	69.1	460.2
55,0°	3.6	3.6	3.8	3.8	3.9	3.9	3.9	3.9	4.0	4.0	3.9	82.6	542.8
57,5°	3.2	3.4	3.6	3.8	3.8	3.8	3.9	3.9	3.9	3.9	3.9	96.3	639.1
60,0°	2.9	3.1	3.5	3.7	3.8	3.8	3.8	3.8	3.8	3.8	3.7	103.9	743.1
62,5°	2.6	3.0	3.4	3.5	3.7	3.7	3.6	3.6	3.6	3.6	3.6	95.6	838.6
65,0°	2.5	3.0	3.3	3.4	3.5	3.5	3.4	3.4	3.4	3.4	3.4	75.8	914.5
67,5°	2.4	2.8	3.0	3.1	3.2	3.2	3.2	3.2	3.2	3.2	3.2	46.2	960.7
70,0°	2.2	2.5	2.7	2.9	3.0	3.0	3.0	3.0	2.9	2.9	2.9	22.7	983.4
72,5°	2.0	2.3	2.5	2.7	2.9	2.7	2.6	2.6	2.6	2.5	2.5	9.5	992.9
75,0°	1.7	2.0	2.2	2.3	2.3	2.3	2.2	2.2	2.2	2.1	2.1	4.2	997.1
77,5°	1.4	1.6	1.7	1.7	1.8	1.8	1.8	1.8	1.8	1.7	1.7	1.5	998.6
80,0°	1.1	1.2	1.3	1.3	1.3	1.4	1.4	1.4	1.4	1.4	1.3	0.8	999.4
82,5°	0.8	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.4	999.8
85,0°	0.5	0.5	0.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.2	999.9
87,5°	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

office	industry	traffic	retail	public	sports
--------	----------	---------	--------	--------	--------

Photometric test report

Family Floodlight FL11	Order number: 5XA779617X51AB EAN: 4069025142689	LP number 59552_106
Dimming levels table		environmental temperature: 0°C

siteco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
99	252	254	122257	1178.9
95	237	251	116858	1108.1
90	221	249	110820	1032.5
85	205	246	104518	957.9
80	190	243	98326	888.0
75	176	241	92385	822.8
70	162	238	86143	757.8
65	149	234	80126	698.2
60	135	231	73654	634.1
55	122	227	67447	574.9
50	110	223	61529	520.3
45	98	219	55469	465.9
40	86	214	49187	412.1
35	75	209	43269	362.4
30	63	203	36788	309.1
25	53	197	31019	265.0
20	42	188	24747	216.9
15	31	177	18490	168.5
10	20	161	12072	111.6
5	10	136	6059	62.9
1	2	77	1124	24.5

Dimming levels table		environmental temperature: 25°C
----------------------	--	---------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
95	----	----	----	----
90	----	----	----	----
85	----	----	----	----
80	----	----	----	----
76	176	241	88785	813.0
75	172	240	87119	794.8
70	158	237	81283	730.4
65	145	234	75678	671.4
60	131	230	69564	608.0
55	119	226	64097	553.5
50	106	222	57965	495.3
45	94	218	52108	441.8
40	83	213	46564	392.7
35	72	208	40878	343.9
30	61	202	35063	295.8
25	50	195	28929	247.5
20	40	186	23383	205.1
15	30	176	17722	160.3
10	19	159	11417	105.4
5	10	136	6040	61.9
1	2	77	1123	24.1

Photometric test report

Family Floodlight FL11	Order number: 5XA779617X51AB EAN: 4069025142689	LP number 59552_106
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
0.0	122980.0	1188.4
25.0	89240.0	818.1