

Photometric test report

Family
Modario® 31



Order number: 53BM8127U4L3D2
EAN: 4069025222213

Version

Lamps

Controlgear

Rated values

diffuser optic, frosted, wide distribution

LED 4000 K | CRI ≥ 80


ECG

Net luminous flux = 23600 lm
Power consumption = 126.0 W
Luminous efficacy = 187.3 lm/W

LP number
59594_120

serial
documentation
30.08.2024

siteco

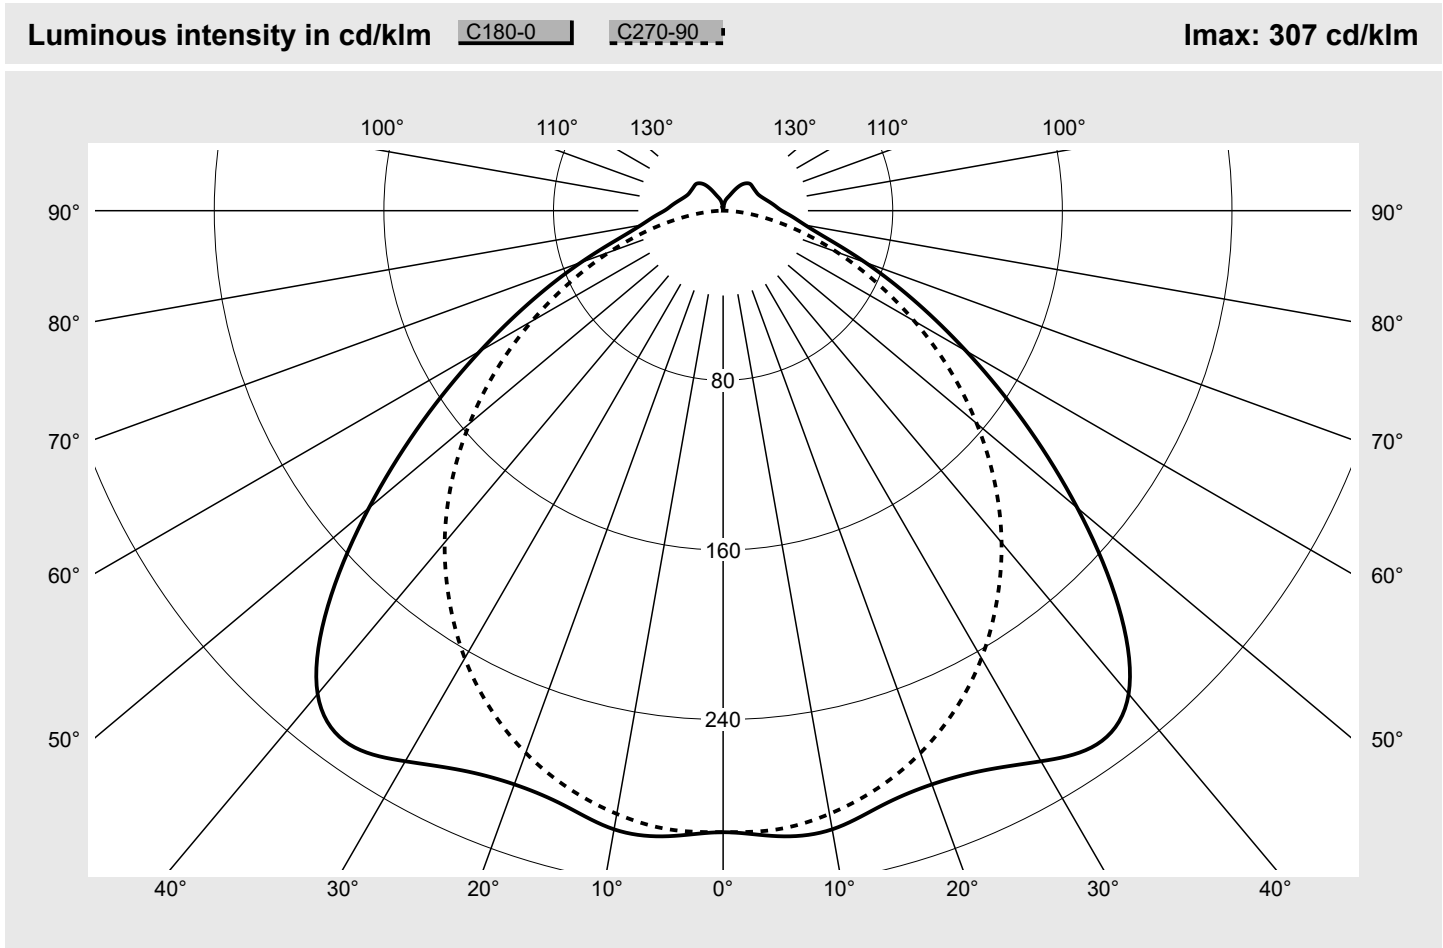

Classifications		Luminaire light output ratios	
DIN 5040	A 4 1	η_{LB}	100.0%
CIE	N1=47 N2=80 N3=95	ϕ_u	92.6%
	N4=93 N5=100	ϕ_o	7.4%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Modario® 31	Order number: 53BM8127U4L3D2 EAN: 4069025222213	LP number 59594_120
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	293.1	293.1	293.1	293.1	293.1	293.1	293.1	1.8	1.8
5°	296.1	295.6	293.1	293.6	293.8	293.0	292.9	14.0	15.8
10°	296.3	296.3	293.6	293.6	292.6	289.9	288.9	27.9	43.7
15°	290.3	290.9	288.4	289.1	288.3	284.2	281.9	40.8	84.5
20°	287.9	288.2	282.8	281.1	280.6	275.9	272.2	52.8	137.3
25°	291.3	290.8	281.6	274.0	270.0	264.7	259.4	64.0	201.2
30°	299.8	298.4	283.7	269.7	258.3	250.5	243.7	74.6	275.8
35°	307.3	306.0	288.6	266.7	246.6	233.7	225.0	84.2	360.1
40°	297.5	299.0	287.4	263.1	235.0	215.2	204.3	91.1	451.1
45°	263.6	268.2	268.7	253.4	221.8	194.2	181.1	92.3	543.4
50°	218.1	223.5	232.0	231.1	204.9	171.7	156.1	87.5	630.9
55°	172.9	177.3	186.9	195.4	181.1	147.5	130.2	77.8	708.7
60°	132.3	135.3	142.3	152.9	149.4	121.4	104.1	64.8	773.5
65°	98.5	100.2	104.0	112.2	114.5	94.5	79.4	50.9	824.4
70°	71.4	72.6	74.4	79.3	82.2	69.0	57.1	37.9	862.3
75°	51.0	51.6	52.9	55.5	55.9	46.4	37.5	27.0	889.4
80°	39.4	39.1	38.7	38.1	35.5	27.5	20.9	18.8	908.2
85°	32.8	32.1	30.1	26.5	21.0	13.7	8.3	13.1	921.3
90°	27.7	27.1	24.5	19.3	12.6	5.6	0.8	9.4	930.7
95°	24.8	24.4	22.4	17.8	11.6	5.3	0.8	8.6	939.3
100°	22.5	22.2	20.5	16.7	11.5	5.5	0.8	7.9	947.2
105°	20.6	20.3	18.7	16.0	11.5	5.9	0.8	7.3	954.6
110°	19.2	18.7	17.6	15.5	11.7	6.3	0.7	6.8	961.4
115°	18.2	17.8	17.0	15.3	12.2	5.8	0.8	6.4	967.8
120°	17.9	17.4	16.9	15.5	12.3	5.3	0.8	6.1	973.9
125°	17.8	17.4	16.9	15.5	11.8	5.2	0.8	5.7	979.6
130°	17.9	17.4	16.8	15.0	10.1	5.0	0.9	5.2	984.7
135°	17.9	17.3	16.2	13.6	8.1	4.3	1.0	4.5	989.2
140°	16.9	16.0	14.5	11.2	6.7	3.5	1.1	3.6	992.8
145°	14.9	14.0	12.0	8.5	5.5	2.8	1.2	2.7	995.4
150°	11.8	10.8	9.0	6.5	4.7	2.2	1.4	1.8	997.3
155°	8.6	8.1	7.0	5.2	4.0	1.7	1.5	1.2	998.5
160°	6.8	6.5	5.3	4.3	3.2	1.5	1.5	0.8	999.2
165°	5.5	5.3	3.9	3.4	2.1	1.6	1.6	0.5	999.7
170°	3.8	3.1	2.5	2.0	1.6	1.6	1.6	0.2	999.9
175°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	0.1	1000.0
180°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	0.0	1000.0

Photometric test report

Family Modario® 31	Order number: 53BM8127U4L3D2 EAN: 4069025222213	LP number 59594_120
UGR-Table	Standard room	siteco

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	24.2	25.9	24.6	26.2	26.5	24.0	25.7	24.3	26.0	26.3
	3H	25.1	26.6	25.4	26.9	27.3	25.1	26.6	25.5	27.0	27.3
	4H	25.4	26.8	25.8	27.1	27.5	25.5	26.9	25.9	27.3	27.7
	6H	25.7	27.0	26.1	27.3	27.7	25.8	27.1	26.2	27.5	27.9
	8H	25.8	27.1	26.3	27.4	27.9	25.9	27.1	26.3	27.5	27.9
	12H	26.0	27.2	26.4	27.6	28.0	25.9	27.1	26.3	27.5	27.9
4H	2H	24.8	26.3	25.2	26.6	27.0	24.7	26.2	25.1	26.5	26.9
	3H	25.8	27.1	26.3	27.5	27.9	26.1	27.3	26.5	27.7	28.1
	4H	26.3	27.4	26.7	27.8	28.2	26.6	27.7	27.0	28.1	28.5
	6H	26.6	27.6	27.1	28.0	28.5	26.9	27.9	27.4	28.3	28.8
	8H	26.9	27.7	27.3	28.2	28.6	27.0	27.9	27.5	28.4	28.8
	12H	27.1	27.9	27.6	28.3	28.8	27.1	27.9	27.6	28.4	28.9
8H	4H	26.5	27.4	27.0	27.8	28.3	26.8	27.7	27.3	28.1	28.6
	6H	27.0	27.8	27.5	28.2	28.7	27.3	28.0	27.8	28.5	29.0
	8H	27.3	28.0	27.8	28.4	29.0	27.5	28.1	28.0	28.6	29.1
	12H	27.6	28.2	28.2	28.7	29.2	27.6	28.2	28.1	28.7	29.2
12H	4H	26.6	27.4	27.0	27.8	28.3	26.9	27.6	27.3	28.1	28.6
	6H	27.1	27.8	27.6	28.2	28.8	27.4	28.0	27.9	28.5	29.0
	8H	27.4	28.0	27.9	28.5	29.0	27.6	28.1	28.1	28.6	29.2

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 2392 B = 75	H(C0) = 25 H(C90) = 0	H(C180) = 25 H(C270) = 0
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
γ	Luminance in cd/m²							
45°	36783.4	37748.8	38792.0	38148.4	35374.3	33262.2	33695.8	
50°	31943.1	33052.4	35326.7	36918.1	34976.5	31868.4	31947.4	
55°	26861.6	27848.4	30349.6	33534.6	33540.7	30124.3	29871.2	
60°	22068.1	22845.4	24952.3	28565.0	30498.0	27779.9	27401.0	
65°	17884.0	18456.6	20000.2	23204.7	26267.3	24809.6	24703.9	
70°	14324.8	14810.8	15948.3	18516.4	21691.7	21457.0	21947.9	
75°	11545.4	11913.5	12935.8	15005.9	17514.2	17823.6	19049.9	
80°	10326.8	10486.8	11103.1	12363.6	13839.5	14000.9	15829.3	
85°	10290.9	10364.8	10575.4	10825.1	10929.7	10396.3	12586.6	

Photometric test report

Family
Modario® 31

Order number: 53BM8127U4L3D2
EAN: 4069025222213

LP number
59594_120

Luminance values in cd/m²

γ 65°

γ 70°

γ 75°

γ 80°

γ 85°

siteco

