

Photometric test report

Family
Floodlight FL11



Order number: 5XA779816V01AB
EAN: 4069025145529


Version
Optic
Cover
Lamps
Controlgear
Rated values

standard bracket
asymmetric distribution PL64
toughened safety glass
LED 4000 K | CRI ≥ 70
ECG-DALI
Ta = 0 °C
Net luminous flux = 170220 lm
Power consumption = 1272.3 W
Luminous efficacy = 133.8 lm/W

LP number
59472_132

serial
documentation
12.09.2024


siteco

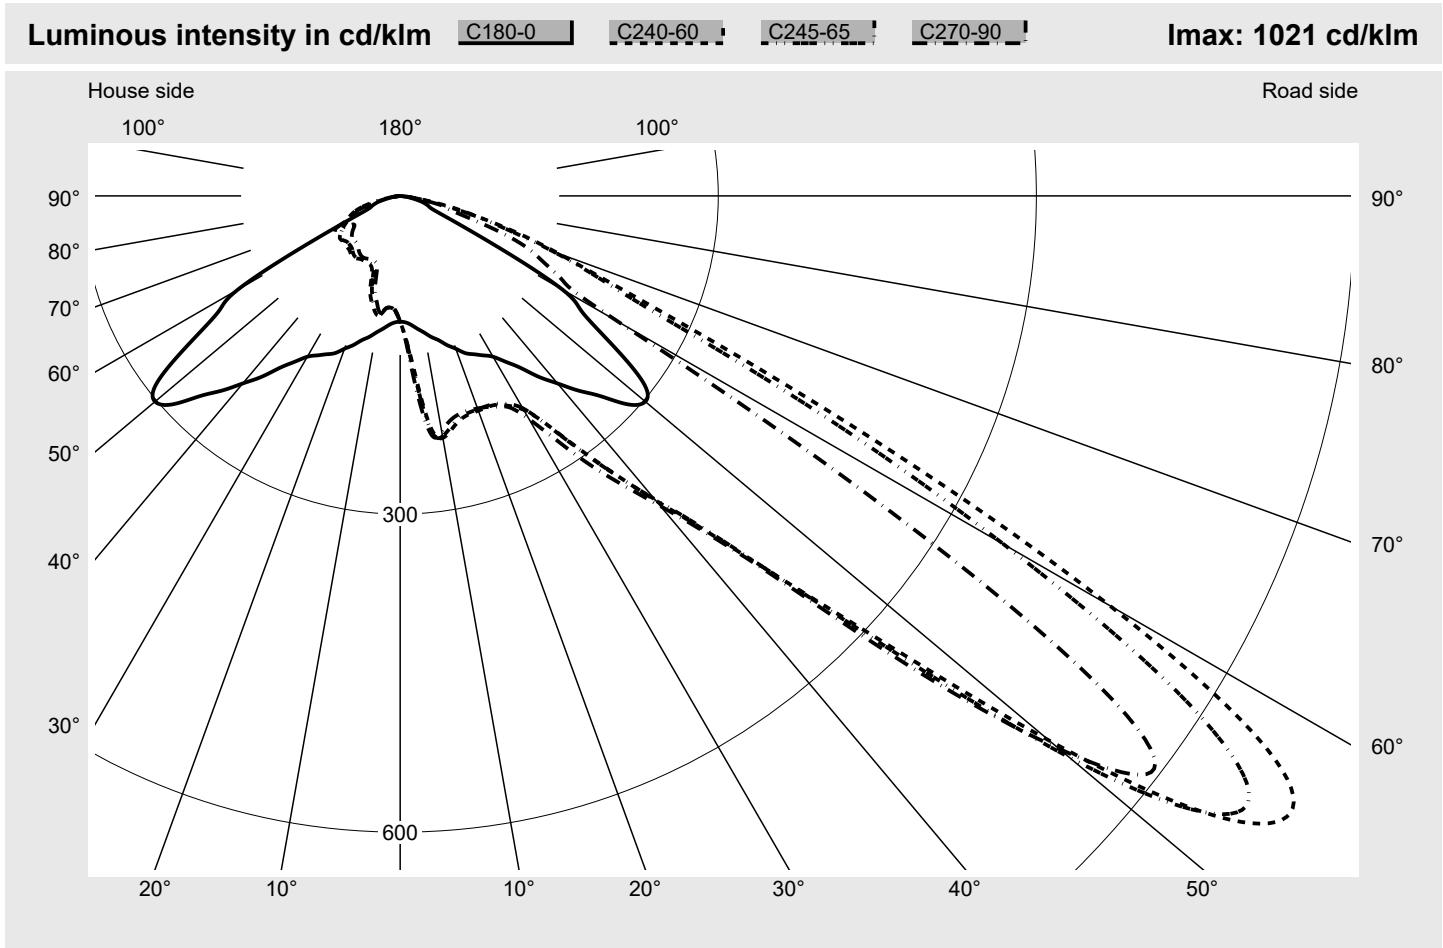

Luminaire output ratios		Luminous intensity class acc. to EN13201-2	
Eta	100.0%	Class:	G6
Eta 0° - 90°	100.0%	Imax 70°	158.5
Eta 90° - 180°	0.0%	Imax 80°	24.0
Measurement conditions		Imax 90°	0.0
		Imax >90°	0.0
		Imax >95°	0.0
DIN EN 13032 and DIN 5032			

Photometric test report

Family Floodlight FL11	Order number: 5XA779816V01AB EAN: 4069025145529	LP number 59472_132
Envelope curve in cd/klm KMK 55° KMK 52,5° KMK 50° KMK 47,5°		siteco

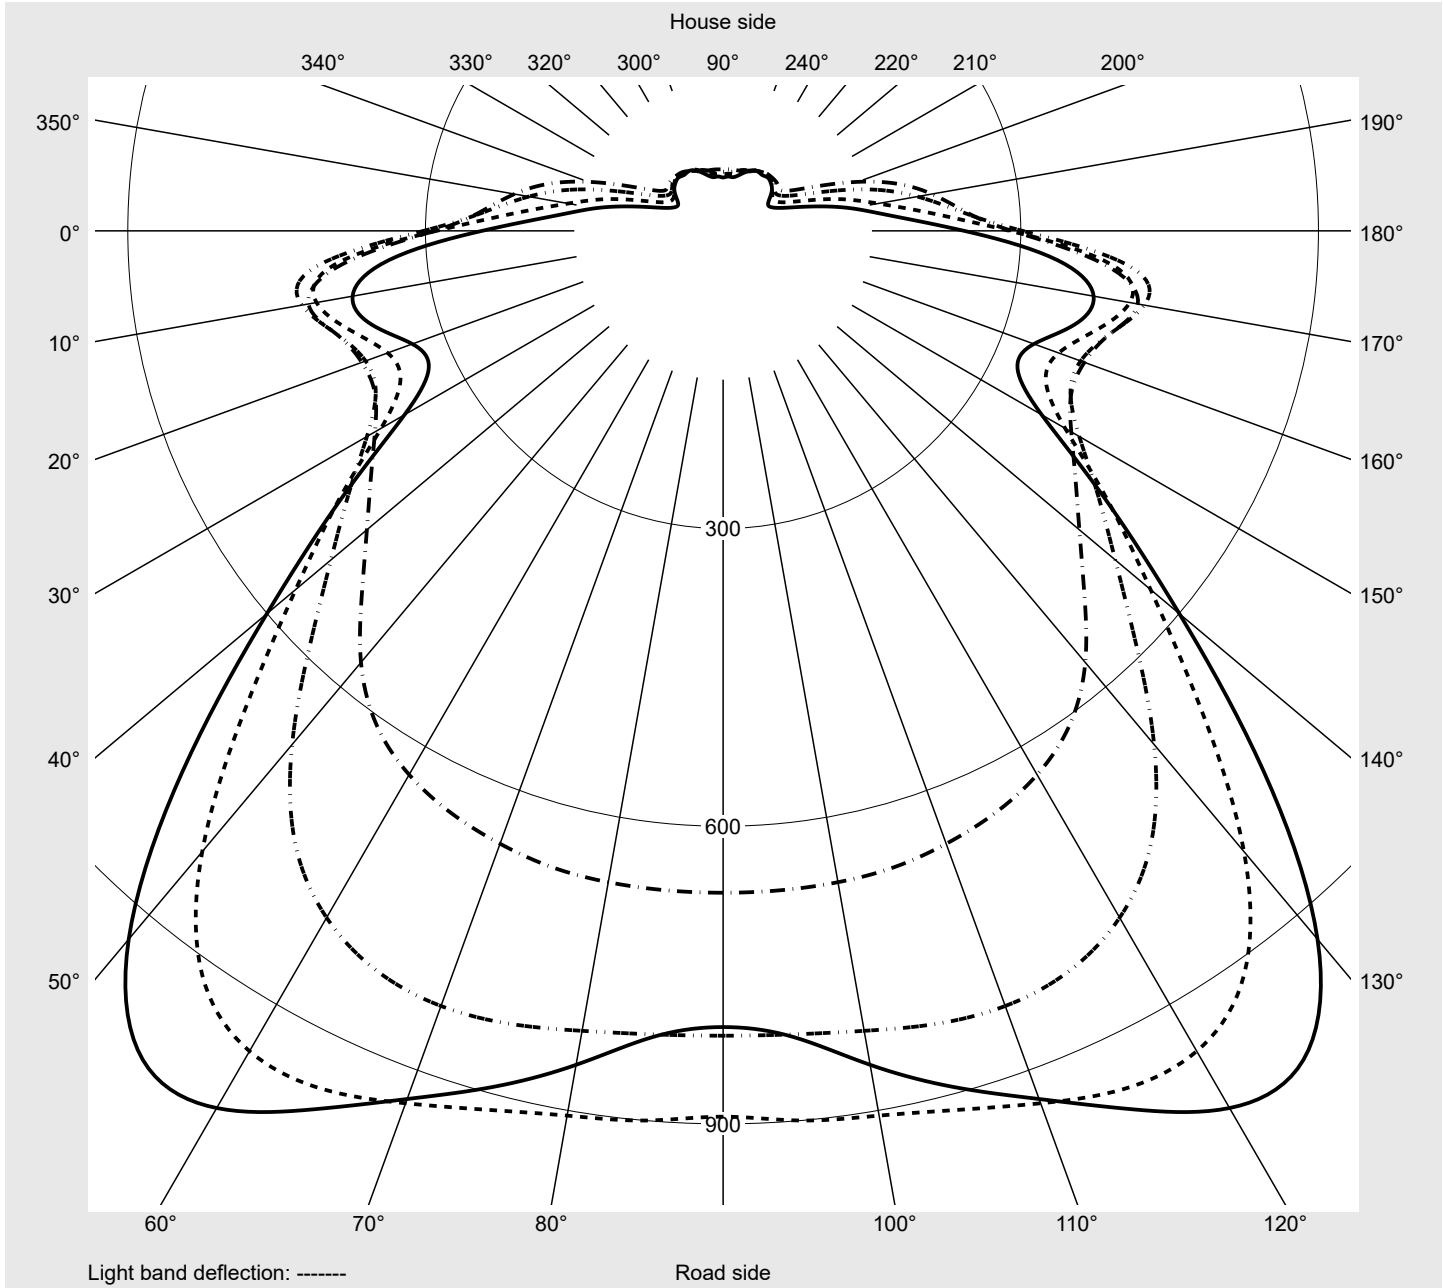

Photometric test report

Family Floodlight FL11	Order number: 5XA779816V01AB EAN: 4069025145529	LP number 59472_132
---------------------------	--	------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7
2,5°	119.5	120.9	122.4	124.1	125.8	127.4	129.0	130.6	132.2	133.6	134.9	135.9	137.0
5,0°	122.3	125.8	129.6	133.3	137.2	141.3	145.4	149.9	154.6	159.2	163.8	168.3	172.8
7,5°	126.5	132.0	138.1	144.5	151.3	159.4	168.6	179.1	190.2	200.5	209.2	215.6	220.2
10,0°	130.9	139.0	147.4	156.8	168.5	183.1	199.3	214.0	224.2	229.7	232.4	232.6	231.8
12,5°	136.3	146.7	157.8	172.0	191.1	212.1	226.7	234.2	236.2	234.5	231.6	228.3	225.3
15,0°	141.0	154.0	168.5	188.5	213.0	230.0	237.6	237.6	233.7	229.4	225.5	221.7	218.7
17,5°	147.6	162.6	180.1	207.1	229.0	239.2	238.8	234.4	229.6	225.5	221.6	218.4	215.9
20,0°	153.4	170.9	193.3	221.5	238.9	242.1	238.4	233.8	229.7	225.5	221.5	218.1	215.5
22,5°	160.5	179.7	207.1	234.4	245.6	244.2	241.1	237.7	233.5	228.3	223.1	218.8	215.5
25,0°	164.8	186.8	218.2	242.9	249.2	248.8	248.2	245.4	239.9	233.1	226.3	220.8	217.3
27,5°	169.6	194.1	227.7	248.3	253.8	257.5	259.1	255.6	248.6	240.1	232.1	226.6	223.3
30,0°	175.1	202.7	236.8	254.3	261.8	269.1	271.2	266.8	258.7	250.0	243.1	237.3	233.0
32,5°	185.6	216.2	250.3	266.9	276.4	284.4	285.7	279.4	271.3	265.4	260.3	255.3	254.0
35,0°	198.0	233.3	269.0	286.5	299.5	305.4	301.8	293.4	289.7	288.9	288.0	288.1	288.1
37,5°	215.2	255.7	292.3	314.0	330.8	328.0	314.6	310.7	315.3	321.3	326.6	328.3	328.4
40,0°	230.8	280.3	323.6	349.8	357.7	344.6	332.6	335.8	347.0	361.7	372.5	376.1	375.0
42,5°	249.1	308.5	362.0	378.6	371.0	360.8	358.1	365.9	384.0	406.1	425.1	432.5	430.8
45,0°	267.0	343.3	395.4	393.0	380.0	376.1	384.1	400.6	425.2	456.4	489.1	508.7	514.6
47,5°	290.9	385.2	424.4	403.1	387.5	387.2	405.2	433.4	468.7	514.7	567.8	608.5	632.9
50,0°	301.8	411.6	431.0	402.8	383.5	386.3	414.5	460.4	516.0	588.4	675.8	752.3	799.3
52,5°	288.8	393.5	416.1	388.3	359.8	358.9	398.1	473.0	562.4	681.0	816.7	915.4	954.6
55,0°	242.9	338.1	379.2	366.2	333.3	327.3	370.8	469.1	600.3	770.6	932.0	1019.8	1020.8
57,5°	203.2	264.4	322.8	325.6	307.1	308.2	353.7	473.3	645.9	816.0	952.7	1011.0	967.8
60,0°	176.9	218.8	282.7	301.7	302.6	320.1	369.6	512.6	680.9	794.2	870.1	863.1	772.6
62,5°	100.6	147.9	213.6	250.4	276.8	321.6	416.7	580.8	682.3	701.5	658.3	589.3	526.4
65,0°	52.2	75.3	126.0	166.1	202.5	264.7	379.0	503.6	557.9	482.0	403.1	361.8	327.9
67,5°	33.4	45.5	77.7	114.5	140.6	173.8	233.5	302.4	314.1	261.9	219.3	214.6	215.7
70,0°	28.7	34.1	45.8	69.0	93.0	107.1	129.9	149.4	153.2	125.9	115.4	137.6	158.5
72,5°	25.2	28.2	29.2	34.1	48.0	59.5	67.5	60.0	40.3	46.0	63.2	93.8	115.2
75,0°	20.6	22.2	23.2	28.6	30.2	39.7	42.5	26.8	29.1	36.0	44.1	60.6	76.0
77,5°	14.1	15.7	16.9	21.3	23.0	28.4	27.9	21.0	21.6	26.1	29.9	41.2	49.7
80,0°	9.2	10.0	12.2	14.4	17.3	18.2	18.2	15.6	14.4	17.4	17.5	22.6	24.0
82,5°	5.5	6.1	8.1	9.6	11.7	12.6	11.7	10.1	8.6	9.8	9.7	9.9	10.0
85,0°	2.5	3.0	4.2	5.3	6.0	6.3	5.6	4.6	3.6	2.8	2.7	2.8	3.0
87,5°	0.9	1.1	1.3	1.4	1.5	1.4	1.2	1.0	0.9	0.8	0.9	0.9	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779816V01AB EAN: 4069025145529	LP number 59472_132
---------------------------	--	------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7
2,5°	138.0	138.7	139.3	140.0	140.8	140.9	117.9	116.5	115.3	114.2	113.1	112.3	111.5
5,0°	176.8	180.1	183.0	185.2	187.0	187.5	119.2	116.4	114.1	112.2	110.6	109.4	108.5
7,5°	223.1	225.2	226.1	226.7	227.2	227.5	121.5	117.5	114.4	112.0	110.5	109.5	108.6
10,0°	230.2	228.7	227.2	226.2	225.6	225.7	124.0	118.8	115.2	113.0	111.5	110.5	109.9
12,5°	222.6	220.6	218.9	217.8	217.0	217.1	127.0	120.4	116.4	114.3	113.1	113.5	115.7
15,0°	216.5	215.1	214.1	213.3	212.9	213.3	129.6	121.8	117.7	115.8	116.6	119.5	120.5
17,5°	214.4	213.4	212.7	212.3	212.1	212.5	133.2	124.3	119.9	119.3	122.7	123.3	120.9
20,0°	214.1	213.6	213.2	213.0	213.1	213.3	137.1	127.4	123.4	126.6	126.9	123.9	116.6
22,5°	214.3	214.4	214.7	215.0	215.1	215.5	141.6	131.5	130.1	133.5	129.8	121.1	112.4
25,0°	216.2	216.9	218.0	218.7	219.0	219.2	144.8	135.6	139.1	137.9	129.9	118.0	107.7
27,5°	221.4	221.4	222.7	224.2	224.9	225.3	148.8	141.1	148.2	141.8	128.2	114.5	99.6
30,0°	231.3	233.0	236.6	240.1	242.2	243.1	154.8	149.7	156.9	144.7	125.6	108.0	89.9
32,5°	254.6	257.7	262.7	267.4	270.4	271.7	164.4	162.0	166.2	147.7	123.8	99.9	84.5
35,0°	289.2	292.3	297.4	302.4	305.8	307.3	176.3	176.8	173.6	149.1	120.8	94.1	82.0
37,5°	329.5	331.1	334.3	338.5	341.3	342.6	189.7	187.5	178.7	151.6	120.7	94.9	82.2
40,0°	373.3	373.3	375.2	378.3	380.7	381.9	201.5	195.6	181.9	155.8	121.6	97.2	83.0
42,5°	427.9	427.5	429.7	432.8	434.9	435.9	213.0	203.0	186.2	161.1	124.4	97.5	82.2
45,0°	515.9	516.7	519.4	522.7	524.5	524.6	228.5	211.1	186.6	157.6	119.9	91.7	77.6
47,5°	647.7	657.3	664.1	666.6	667.1	667.1	241.9	213.6	182.8	144.4	107.2	82.1	71.3
50,0°	823.6	831.4	827.5	818.7	812.9	811.2	237.2	198.9	160.0	117.9	86.6	70.6	65.1
52,5°	954.4	935.7	917.1	905.4	900.0	892.7	208.7	158.6	123.3	89.3	68.1	60.6	60.6
55,0°	976.9	931.1	893.0	853.5	815.6	802.4	171.6	131.0	95.0	68.3	55.6	52.4	57.3
57,5°	866.1	761.2	674.8	597.6	539.1	514.3	155.1	115.7	79.1	56.8	48.7	47.5	53.9
60,0°	657.6	553.5	435.7	331.3	258.5	238.3	137.5	95.3	65.7	50.4	43.4	44.7	50.5
62,5°	454.3	354.9	248.8	185.2	174.2	172.9	91.7	61.1	55.6	46.0	39.3	39.9	45.7
65,0°	283.3	224.2	165.4	154.7	151.8	150.6	55.4	44.9	47.1	42.1	36.8	36.0	39.7
67,5°	203.8	163.6	142.4	137.1	134.0	131.8	39.2	38.4	38.9	37.8	35.3	33.6	35.9
70,0°	154.3	127.7	119.4	113.4	105.6	101.9	29.8	33.0	35.2	34.9	32.9	30.9	33.4
72,5°	107.0	89.2	82.5	76.1	68.1	64.5	24.7	26.7	29.6	29.3	27.7	26.7	28.3
75,0°	73.6	60.1	54.2	53.5	49.0	46.2	21.4	23.0	23.8	23.4	22.6	21.8	21.8
77,5°	43.5	36.8	35.5	41.0	40.5	37.4	15.8	17.8	17.7	16.9	17.1	16.0	15.3
80,0°	22.6	21.6	21.1	23.7	20.1	17.7	10.0	11.6	11.6	11.4	11.2	10.3	9.6
82,5°	9.7	9.3	9.3	9.6	7.9	7.0	5.9	6.6	7.0	7.0	6.5	5.9	5.5
85,0°	2.9	2.8	2.5	2.4	2.3	2.3	2.8	3.2	3.6	3.2	3.0	2.9	2.6
87,5°	0.9	0.9	0.9	0.9	0.9	0.9	1.0	1.1	1.2	1.2	1.2	1.1	1.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11				Order number: 5XA779816V01AB EAN: 4069025145529								LP number 59472_132			
Table of values for luminous intensities												Maximum luminous intensity		sīteco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone		
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm			
0,0°	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	0.2	0.2		
2,5°	110.8	110.2	109.6	109.2	108.8	108.5	108.3	108.2	108.1	107.7	107.7	1.5	1.6		
5,0°	107.8	107.2	106.7	106.4	106.0	105.7	105.5	105.4	105.2	105.0	104.9	3.2	4.8		
7,5°	107.8	107.1	106.8	106.9	107.4	107.9	108.5	109.0	109.3	109.4	109.3	5.4	10.2		
10,0°	110.4	111.9	113.3	113.9	114.3	114.1	113.5	112.9	112.3	111.8	111.4	7.6	17.8		
12,5°	117.2	117.6	116.5	114.2	111.2	108.5	106.4	104.7	103.5	102.6	102.2	9.6	27.4		
15,0°	119.4	115.6	111.1	107.2	103.5	100.3	97.6	95.5	93.8	92.6	92.0	11.4	38.8		
17,5°	115.0	109.5	104.3	99.2	93.8	88.0	82.5	78.0	75.0	73.3	72.6	13.1	51.9		
20,0°	109.9	103.3	95.5	86.2	78.0	72.9	70.2	68.6	67.6	67.0	66.7	14.9	66.8		
22,5°	104.0	93.0	81.4	74.7	71.6	69.7	68.3	67.3	66.5	66.0	65.8	16.7	83.5		
25,0°	94.5	81.7	75.5	72.3	70.4	69.0	68.0	67.2	66.6	66.1	65.9	18.7	102.3		
27,5°	85.0	77.8	73.8	71.4	70.0	69.2	68.6	67.9	67.4	67.0	66.8	20.9	123.1		
30,0°	80.9	76.0	72.9	71.0	70.0	69.5	69.1	68.5	68.0	67.6	67.6	23.4	146.5		
32,5°	78.2	74.6	72.3	71.0	70.5	70.3	69.7	68.9	68.2	67.7	67.5	26.6	173.1		
35,0°	76.1	73.5	72.5	72.4	72.0	71.2	70.0	68.6	67.5	66.7	66.3	30.5	203.6		
37,5°	75.6	73.3	73.4	73.8	73.0	71.1	69.0	67.1	65.5	64.6	64.3	35.1	238.7		
40,0°	76.1	74.0	73.9	74.0	72.1	69.3	66.7	64.3	62.8	62.1	61.7	40.2	279.0		
42,5°	76.9	74.8	73.9	72.8	70.4	67.2	64.6	62.9	61.7	61.1	60.9	46.2	325.2		
45,0°	75.7	74.6	73.0	72.0	69.6	66.4	63.8	62.4	61.3	60.7	60.5	53.7	378.9		
47,5°	72.1	72.9	72.8	72.1	69.5	66.2	63.7	62.7	62.6	62.2	61.9	63.4	442.3		
50,0°	67.2	71.2	72.5	71.6	69.5	66.6	65.2	63.1	60.8	59.8	59.6	73.9	516.3		
52,5°	64.4	69.3	71.6	70.8	69.2	68.2	63.9	60.6	58.3	57.8	57.1	81.7	597.9		
55,0°	64.2	68.0	70.0	68.7	69.4	67.3	62.5	57.6	54.9	55.0	53.8	83.2	681.1		
57,5°	62.3	67.1	67.2	66.0	66.6	65.8	60.2	55.2	52.9	52.6	51.1	76.1	757.2		
60,0°	57.3	64.1	64.3	62.2	63.1	63.2	58.7	54.8	53.1	55.2	56.2	65.5	822.7		
62,5°	51.2	57.8	61.2	58.7	58.9	59.2	57.8	56.8	62.8	70.0	69.3	53.9	876.6		
65,0°	46.0	50.6	55.4	54.9	54.3	55.7	57.4	66.3	66.7	59.9	56.9	40.4	917.0		
67,5°	39.9	43.1	46.6	48.3	49.4	51.9	60.8	65.3	58.0	53.0	50.7	28.1	945.1		
70,0°	33.8	34.3	37.9	40.4	42.2	47.5	59.1	60.1	51.6	47.0	45.7	19.5	964.6		
72,5°	26.5	26.0	26.8	30.1	34.3	41.5	47.9	49.8	43.4	38.3	37.0	12.6	977.3		
75,0°	20.0	17.9	19.3	21.6	25.3	33.0	36.3	36.9	34.0	30.0	28.4	9.1	986.4		
77,5°	13.7	12.6	13.0	14.9	17.2	22.7	24.4	24.6	24.0	21.6	19.8	6.5	992.8		
80,0°	8.4	8.1	8.4	9.3	10.4	12.2	13.9	14.2	14.0	13.2	12.2	3.9	996.8		
82,5°	4.9	4.6	4.7	5.2	5.6	6.0	6.8	6.8	6.5	6.2	5.7	2.1	998.9		
85,0°	2.4	2.2	2.2	2.2	2.2	2.2	2.1	2.0	2.0	2.0	2.0	0.8	999.7		
87,5°	1.1	1.1	1.2	1.2	1.2	1.2	1.2	1.3	1.3	1.3	1.3	0.3	1000.0		
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0		

Photometric test report

Family Floodlight FL11	Order number: 5XA779816V01AB EAN: 4069025145529	LP number 59472_132
Dimming levels table environmental temperature: 0°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
95	237	251	161545	1185.5
90	221	249	153154	1104.7
85	206	246	144862	1029.2
80	191	244	136307	954.4
75	176	241	127462	879.3
70	163	238	119432	815.0
65	149	234	110549	745.4
60	136	231	102096	681.6
55	123	227	93527	618.0
50	111	224	85349	559.4
45	99	219	76927	501.0
40	87	215	68370	443.1
35	75	209	59554	385.2
30	64	204	51333	332.7
25	53	197	42757	280.6
20	42	188	34133	228.8
15	31	177	25405	178.2
10	20	161	16610	117.4
5	10	136	8383	65.8
1	2	77	1556	25.2

Dimming levels table	environmental temperature: 25°C
-----------------------------	---------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
95	----	----	----	----
90	----	----	----	----
85	----	----	----	----
81	191	244	130930	943.1
80	187	243	128805	923.5
75	173	240	121081	854.1
70	159	237	113003	785.3
65	146	234	105108	721.3
60	132	230	96570	653.0
55	119	226	88373	590.2
50	107	222	80565	532.3
45	95	218	72471	474.9
40	84	214	64868	422.3
35	72	208	56322	365.2
30	61	202	48304	313.7
25	51	195	40674	267.2
20	40	186	32179	216.3
15	30	176	24451	170.6
10	20	161	16516	115.5
5	10	136	8359	64.8
1	2	77	1554	24.8

Photometric test report

Family Floodlight FL11	Order number: 5XA779816V01AB EAN: 4069025145529	LP number 59472_132
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
0.0	170220.0	1272.3
25.0	130930.0	943.1