

Photometric test report

Family
Monsun® 21



Order number: 51FB107L447K3G
EAN: 4069025131508

Version

Lamps

Controlgear

Rated values

prismatic diffuser, opal, PMMA, extremely wide distribution, emergence lighting 3h

LED 4000 K | CRI ≥ 80


ECG

Net luminous flux = 4330 lm
Power consumption = 28.8 W
Luminous efficacy = 150.3 lm/W

LP number
59393_33

serial
documentation
20.09.2024

siteco

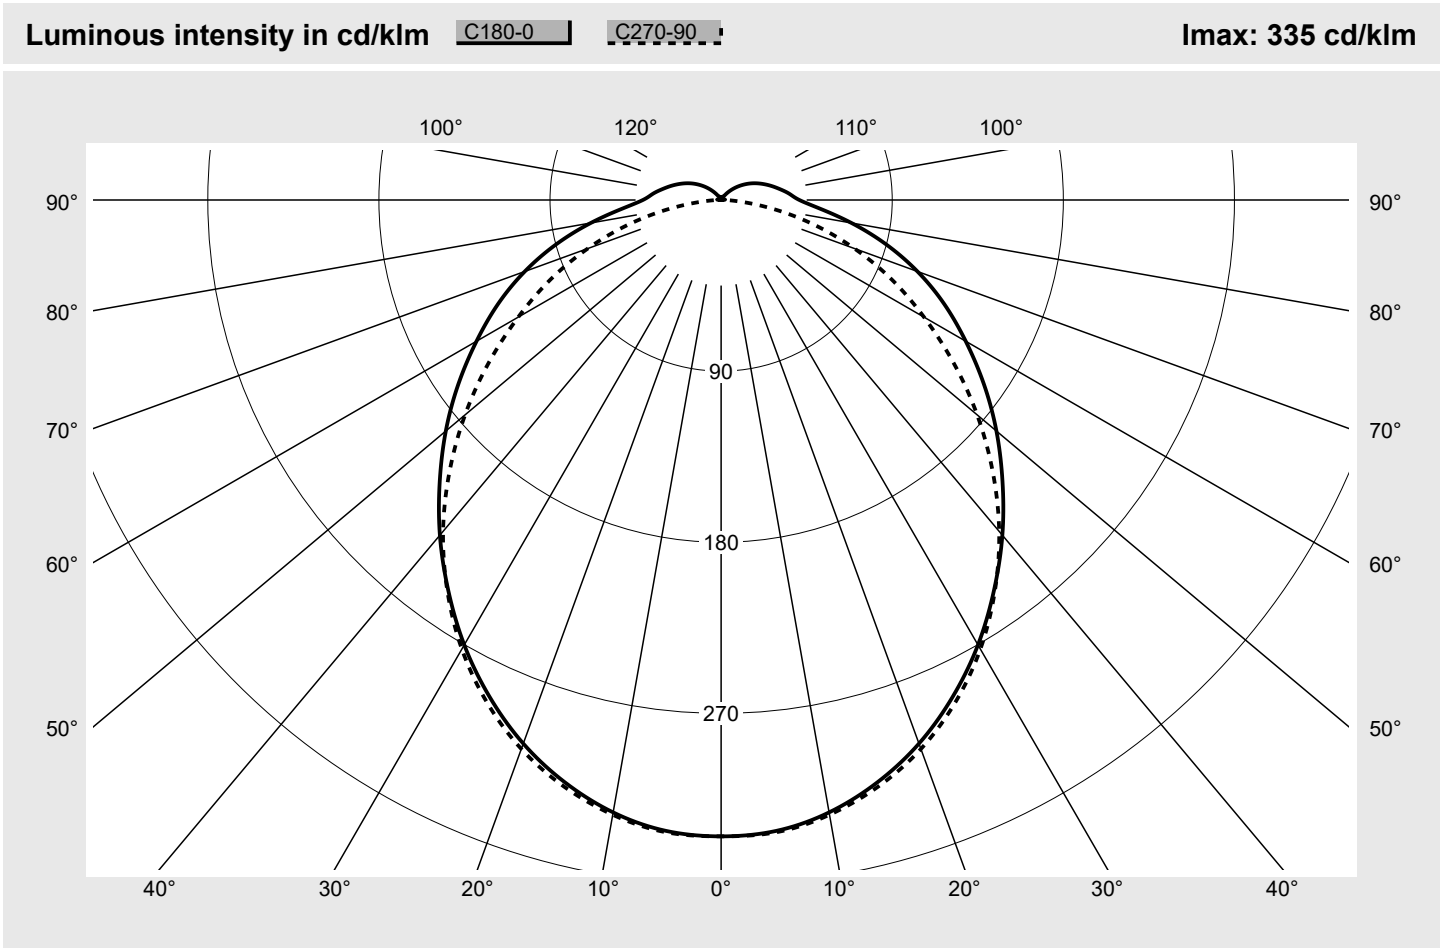

Classifications		Luminaire light output ratios	
DIN 5040	A 4 1	η_{LB}	100.0%
CIE	N1=46 N2=76 N3=93	ϕ_u	93.9%
	N4=94 N5=100	ϕ_o	6.1%

Measurement conditions	
DIN EN 13032 and DIN 5032	

Photometric test report

Family Monsun® 21	Order number: 51FB107L447K3G EAN: 4069025131508	LP number 59393_33
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	334.7	334.7	334.7	334.7	334.7	334.7	334.7	2.0	2.0
5°	333.1	333.6	331.1	331.9	332.7	333.2	333.8	15.9	17.9
10°	327.1	327.9	325.6	326.0	327.2	327.9	328.3	31.1	49.0
15°	317.2	318.4	316.4	316.9	317.9	318.6	319.4	45.1	94.1
20°	304.3	305.5	304.0	304.0	305.5	306.0	307.3	57.2	151.3
25°	288.3	289.5	288.3	288.0	289.4	289.8	291.5	67.0	218.3
30°	270.2	271.6	270.4	269.7	270.4	271.0	272.7	74.2	292.5
35°	250.3	251.6	250.4	249.2	249.0	249.3	251.0	78.6	371.1
40°	230.1	230.9	229.3	227.2	226.1	225.6	227.5	80.3	451.4
45°	209.3	209.8	207.4	204.4	202.0	200.5	202.0	79.4	530.9
50°	189.0	188.7	186.0	181.6	177.7	174.7	175.8	76.4	607.2
55°	168.7	168.2	164.8	159.1	153.5	149.2	149.2	71.4	678.6
60°	148.6	147.7	143.7	136.7	130.2	124.3	123.2	64.8	743.4
65°	129.5	127.8	123.0	114.9	108.3	100.8	99.1	57.1	800.4
70°	109.9	108.0	102.2	93.4	85.8	77.4	74.6	48.0	848.4
75°	89.7	87.9	81.7	72.5	63.8	55.3	51.1	38.1	886.5
80°	69.6	67.6	61.9	52.4	43.1	34.0	28.9	27.7	914.2
85°	52.2	49.9	44.6	35.4	25.7	16.3	10.6	18.5	932.7
90°	41.2	39.2	34.0	25.7	16.3	7.4	2.3	13.2	945.9
95°	36.2	34.5	30.1	22.6	13.9	5.6	2.0	11.4	957.3
100°	31.8	30.4	26.2	19.4	11.5	4.0	1.7	9.7	967.1
105°	27.9	26.5	22.5	16.5	9.2	2.5	1.5	8.1	975.2
110°	24.2	22.6	19.2	13.5	6.9	1.5	1.3	6.6	981.8
115°	20.8	19.1	16.0	10.8	4.9	1.4	1.2	5.2	987.0
120°	17.3	15.9	12.9	8.1	3.1	1.3	1.2	4.0	991.0
125°	13.9	12.5	9.8	5.6	1.6	1.3	1.1	2.9	993.8
130°	10.5	9.4	7.0	3.5	1.5	1.3	1.1	2.0	995.8
135°	7.3	6.4	4.4	1.9	1.5	1.2	1.0	1.3	997.1
140°	4.5	3.8	2.3	1.7	1.5	1.2	1.1	0.8	997.9
145°	2.3	2.1	1.9	1.7	1.5	1.3	1.2	0.5	998.4
150°	2.0	2.0	1.9	1.7	1.5	1.4	1.3	0.5	998.9
155°	1.9	1.9	1.8	1.7	1.5	1.4	1.4	0.4	999.3
160°	1.8	1.8	1.7	1.6	1.5	1.5	1.4	0.3	999.6
165°	1.7	1.7	1.6	1.5	1.5	1.5	1.4	0.2	999.8
170°	1.5	1.5	1.5	1.5	1.5	1.5	1.4	0.1	999.9
175°	1.5	1.5	1.5	1.5	1.5	1.5	1.5	0.1	1000.0
180°	1.5	1.5	1.5	1.5	1.5	1.5	1.5	0.0	1000.0

Photometric test report

Family Monsun® 21	Order number: 51FB107L447K3G EAN: 4069025131508	LP number 59393_33
----------------------	--	-----------------------

UGR-Table		Standard room							siTeco		
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	19.7	21.5	20.1	21.8	22.1	19.6	21.3	19.9	21.6	21.9
	3H	21.6	23.1	21.9	23.4	23.8	21.0	22.6	21.4	22.9	23.3
	4H	22.4	23.9	22.8	24.2	24.6	21.6	23.1	22.0	23.4	23.8
	6H	23.1	24.5	23.6	24.9	25.3	22.0	23.4	22.4	23.8	24.1
	8H	23.5	24.8	23.9	25.1	25.5	22.2	23.4	22.6	23.8	24.2
	12H	23.8	25.0	24.2	25.4	25.8	22.2	23.4	22.6	23.8	24.2
4H	2H	20.5	21.9	20.8	22.3	22.6	20.3	21.8	20.7	22.1	22.5
	3H	22.5	23.7	22.9	24.1	24.5	22.0	23.2	22.4	23.6	24.0
	4H	23.4	24.6	23.9	25.0	25.4	22.7	23.8	23.1	24.2	24.7
	6H	24.3	25.4	24.8	25.8	26.2	23.2	24.2	23.6	24.6	25.1
	8H	24.8	25.7	25.2	26.1	26.6	23.3	24.3	23.8	24.7	25.2
	12H	25.2	26.0	25.6	26.4	26.9	23.5	24.3	23.9	24.7	25.2
8H	4H	23.8	24.7	24.2	25.1	25.6	23.1	24.0	23.6	24.5	24.9
	6H	24.8	25.6	25.3	26.1	26.6	23.8	24.5	24.3	25.0	25.5
	8H	25.4	26.1	25.9	26.5	27.1	24.0	24.7	24.5	25.2	25.7
	12H	25.9	26.5	26.4	27.0	27.5	24.2	24.8	24.7	25.2	25.8
12H	4H	23.8	24.7	24.3	25.1	25.6	23.2	24.0	23.7	24.5	25.0
	6H	24.9	25.6	25.4	26.1	26.6	23.9	24.6	24.4	25.1	25.6
	8H	25.5	26.1	26.0	26.6	27.1	24.2	24.8	24.7	25.3	25.8

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1299 B = 87		H(C0) = 21 H(C90) = 21		H(C180) = 21 H(C270) = 21	
C-planes	γ	0°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°			
		Luminance in cd/m²									
	45°	9136.0	9186.6	9235.2	9367.1	9645.2	10077.9	10772.3			
	50°	8750.4	8768.5	8807.0	8895.6	9129.5	9526.6	10281.2			
	55°	8379.2	8393.6	8400.8	8434.1	8598.1	8968.8	9741.5			
	60°	8028.0	8020.5	7999.7	7964.8	8091.8	8387.5	9185.3			
	65°	7734.8	7680.4	7610.0	7488.1	7614.7	7829.5	8682.0			
	70°	7402.0	7322.1	7167.5	6971.4	7012.0	7135.3	8004.1			
	75°	6982.7	6897.2	6679.5	6389.1	6288.6	6339.9	7136.8			
	80°	6485.7	6362.2	6117.4	5685.6	5391.5	5192.8	5840.6			
	85°	6102.4	5910.1	5634.9	5044.4	4452.6	3785.7	3946.4			

Photometric test report

Family
Monsun® 21

Order number: 51FB107L447K3G
EAN: 4069025131508

LP number
59393_33

Luminance values in cd/m²

γ 65°

γ 70°

γ 75°

γ 80°

γ 85°

siteco

