

Photometric test report

Family
Floodlight FL11



Order number: 5XA779728T02FB
EAN: 4069025145246

Versionstandard bracket

Opticasymmetric distribution PL33T

Covertoughened safety glass

LampsLED 5700 K | CRI ≥ 80


ControlgearECG-DMX

Rated valuesTa = 10 °C
Net luminous flux = 211910 lm
Power consumption = 1737.6 W
Luminous efficacy = 122 lm/W

LP number
59517_312

serial
documentation
19.12.2024

siteco

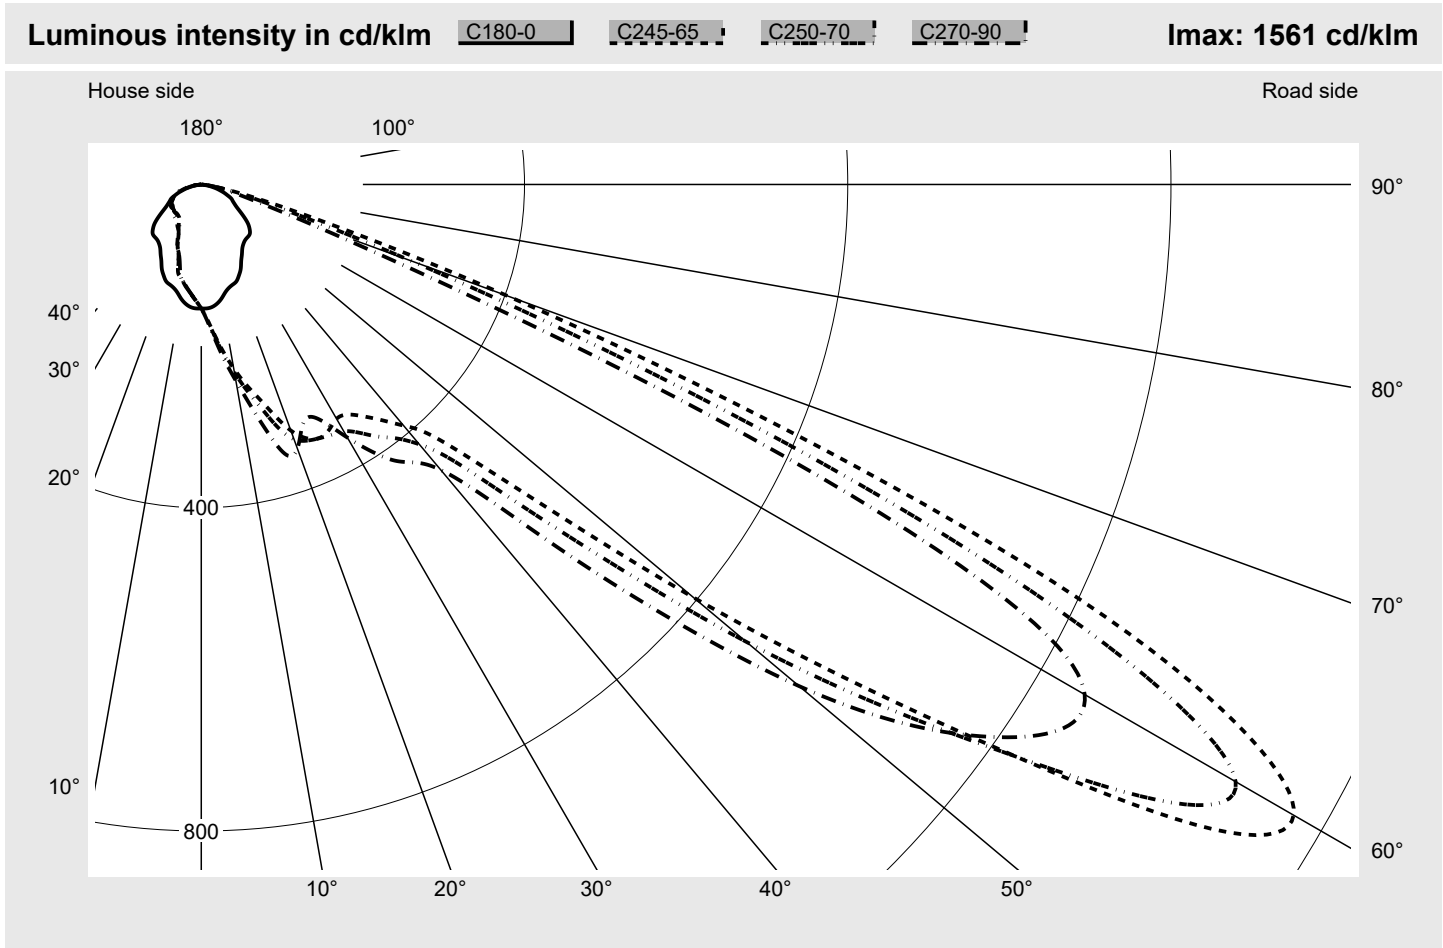

Luminaire output ratios		Luminous intensity class acc. to EN13201-2	
Eta	100.0%	Class:	G4
Eta 0° - 90°	100.0%	Imax 70°	438.4
Eta 90° - 180°	0.0%	Imax 80°	22.0
Measurement conditions		Imax 90°	0.0
		Imax >90°	0.0
		Imax >95°	0.0
DIN EN 13032 and DIN 5032			

Photometric test report

Family
Floodlight FL11

Order number: 5XA779728T02FB
EAN: 4069025145246

LP number
59517_312

Envelope curve in cd/klm


KMK 60°

KMK 57.5°

KMK 55°

KMK 52.5°

siteco

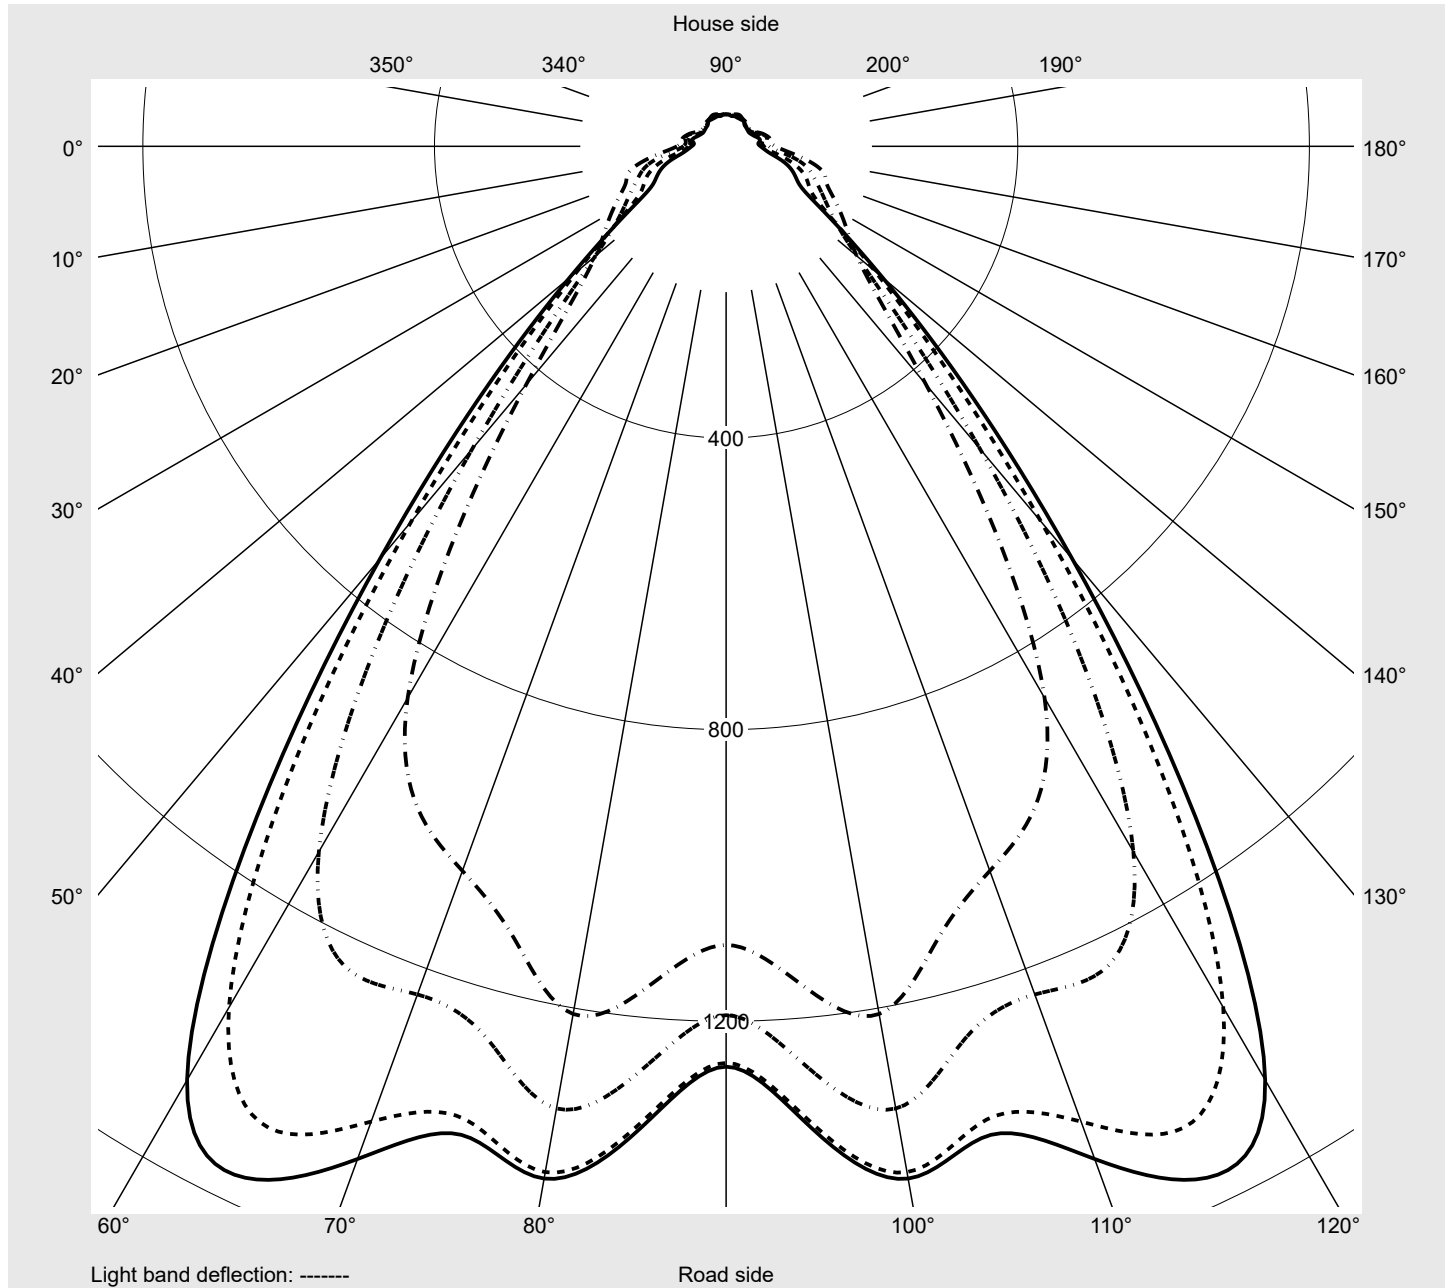

Photometric test report

Family Floodlight FL11	Order number: 5XA779728T02FB EAN: 4069025145246	LP number 59517_312
---------------------------	--	------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5
2,5°	153.5	154.7	156.0	157.2	158.4	159.5	160.6	161.7	162.7	163.7	164.6	165.4	166.2
5,0°	152.2	154.7	157.5	160.4	163.2	166.0	168.9	171.8	174.6	177.3	179.8	182.2	184.4
7,5°	148.8	152.6	156.9	161.4	165.9	170.6	175.9	180.9	185.9	191.0	196.0	200.7	205.0
10,0°	143.5	148.0	153.6	159.8	166.5	173.4	180.8	188.8	196.8	204.4	211.8	218.7	225.1
12,5°	136.9	142.5	149.3	157.0	165.3	174.6	185.0	195.6	206.1	216.0	225.4	234.7	243.8
15,0°	132.4	139.4	147.4	156.2	165.8	176.6	188.6	201.1	213.3	225.3	237.2	248.9	261.0
17,5°	129.8	138.9	148.6	158.9	170.0	182.1	195.0	207.8	220.7	234.1	248.2	263.6	280.5
20,0°	127.4	138.0	149.7	162.4	175.8	189.2	202.6	216.6	231.7	247.4	265.4	285.7	306.3
22,5°	121.8	134.6	148.8	164.4	179.8	194.7	210.5	229.0	248.6	269.7	291.2	312.3	329.5
25,0°	115.4	128.3	144.2	162.3	179.5	196.7	217.6	241.2	264.8	286.9	307.6	325.1	338.1
27,5°	107.0	120.3	137.3	156.9	176.4	200.1	228.1	254.7	276.7	291.5	303.3	315.3	329.3
30,0°	100.5	112.4	130.0	152.0	177.7	209.2	242.0	270.6	283.9	285.3	286.8	295.9	313.6
32,5°	94.4	106.8	125.8	153.6	186.7	224.7	263.0	287.7	287.8	278.9	276.0	286.6	309.0
35,0°	90.6	102.5	125.1	157.8	197.1	241.6	281.0	294.7	287.3	277.3	277.0	293.5	320.0
37,5°	88.2	102.3	128.5	162.3	205.4	253.8	283.2	285.2	279.0	277.2	283.6	304.3	336.6
40,0°	87.1	102.6	129.4	167.8	212.0	255.2	271.2	268.6	270.6	280.5	293.2	316.4	352.3
42,5°	86.6	103.1	132.1	176.4	217.8	247.4	255.2	255.7	269.9	288.1	304.2	330.1	371.6
45,0°	85.2	102.9	135.1	178.0	211.2	227.5	236.8	250.0	272.6	292.9	312.1	352.6	419.7
47,5°	81.1	101.2	135.7	170.5	193.7	203.3	220.2	242.8	265.2	289.3	324.4	401.1	514.1
50,0°	75.5	96.5	130.7	157.0	169.6	180.7	202.2	225.7	248.3	284.1	357.0	499.5	672.6
52,5°	67.5	85.1	114.4	138.2	146.4	161.2	181.1	203.2	233.8	297.3	426.7	642.1	873.6
55,0°	58.9	70.4	95.7	116.2	129.0	142.9	159.9	185.0	234.4	340.3	541.8	838.2	1117.2
57,5°	51.9	57.8	76.4	97.8	114.3	124.8	140.4	183.1	266.7	417.4	671.9	1032.2	1363.8
60,0°	47.2	53.4	63.8	81.5	96.1	106.8	125.4	179.1	280.4	458.4	738.7	1121.7	1478.7
62,5°	43.7	49.2	55.7	67.7	80.2	91.2	111.0	164.1	263.8	433.5	687.6	1065.2	1453.7
65,0°	40.8	45.0	49.9	59.2	68.7	76.5	91.9	130.2	201.3	339.7	544.8	850.5	1236.6
67,5°	35.3	40.1	43.3	50.2	55.8	59.1	65.1	85.3	130.7	222.0	359.1	551.7	806.5
70,0°	30.2	34.6	38.1	42.9	45.0	44.1	45.3	54.9	81.1	138.7	228.3	341.7	438.4
72,5°	24.5	28.7	32.5	35.0	35.1	34.5	31.8	35.9	51.0	83.4	130.3	190.0	237.4
75,0°	19.4	22.3	25.7	26.9	25.7	26.2	22.6	24.7	33.2	53.0	80.9	114.0	134.8
77,5°	13.6	16.3	18.0	18.2	18.0	19.1	16.4	18.0	23.2	34.4	46.3	54.8	54.6
80,0°	9.1	10.4	11.2	9.6	11.2	12.0	10.2	11.6	13.8	14.2	11.7	12.6	15.7
82,5°	4.9	6.0	5.5	5.0	5.8	6.1	5.5	6.1	6.8	5.9	5.9	6.4	7.8
85,0°	2.1	2.4	2.2	2.2	2.2	2.4	2.2	2.4	2.5	2.5	2.7	2.9	3.2
87,5°	0.6	0.7	0.7	0.7	0.7	0.8	0.8	0.8	0.9	1.0	1.0	1.1	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11		Order number: 5XA779728T02FB EAN: 4069025145246										LP number 59517_312	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5
2,5°	166.9	167.5	167.9	168.2	168.8	168.9	152.6	151.7	150.7	149.8	148.9	148.1	147.4
5,0°	186.3	188.0	189.3	190.2	191.3	191.5	150.2	148.3	146.7	145.1	143.6	142.5	141.5
7,5°	208.8	212.1	214.8	216.7	218.3	218.7	145.9	143.4	141.5	139.7	137.9	136.3	135.0
10,0°	231.0	236.2	240.4	243.5	246.0	246.7	139.5	136.7	134.6	132.5	130.5	129.3	128.3
12,5°	252.8	261.1	268.3	274.0	278.3	279.4	132.5	129.3	126.9	124.7	123.0	122.1	121.4
15,0°	273.5	286.1	297.8	307.8	315.3	317.7	127.1	123.5	120.2	117.9	116.3	115.0	113.5
17,5°	298.5	315.1	329.1	340.6	348.5	351.0	123.1	118.3	114.4	111.7	109.6	107.5	106.4
20,0°	324.0	335.4	341.5	345.2	347.5	347.9	118.7	112.6	108.3	105.2	102.6	100.9	99.8
22,5°	339.9	343.1	339.3	333.0	327.7	325.5	112.5	105.7	100.8	97.4	95.0	93.3	92.6
25,0°	346.1	346.4	339.3	329.1	320.7	317.3	104.8	97.7	92.8	89.5	87.3	85.6	77.4
27,5°	342.4	349.2	346.7	340.0	334.7	332.7	97.3	90.2	85.6	82.6	80.4	72.7	68.0
30,0°	334.8	352.6	361.4	361.9	361.0	361.6	91.0	84.4	80.2	77.6	73.3	64.6	63.0
32,5°	337.6	364.3	380.7	386.5	388.9	391.4	86.7	80.7	76.4	73.9	66.1	61.6	60.0
35,0°	350.3	380.8	400.8	409.8	413.8	417.1	83.0	78.2	74.3	70.9	63.0	60.4	57.6
37,5°	367.8	396.0	417.4	427.0	431.0	433.7	80.3	76.6	73.7	67.3	62.4	58.4	54.4
40,0°	389.5	419.7	441.8	455.1	459.5	461.1	78.4	74.4	72.1	63.9	59.0	55.4	52.1
42,5°	420.8	465.9	501.1	527.7	532.2	532.2	76.3	71.5	68.1	62.2	56.9	53.2	50.4
45,0°	495.0	564.9	622.6	666.4	664.2	658.6	73.9	68.2	63.4	59.3	54.1	50.9	48.8
47,5°	618.4	704.8	777.8	839.5	823.9	808.3	71.2	66.1	60.5	56.2	50.8	47.2	45.6
50,0°	795.0	880.6	957.4	1034.8	999.6	965.7	67.1	64.2	58.3	53.3	47.6	43.8	42.4
52,5°	1001.2	1057.5	1124.3	1208.4	1151.9	1095.4	61.5	60.9	57.0	52.0	45.9	41.6	40.2
55,0°	1239.9	1237.9	1266.8	1340.0	1266.8	1191.7	55.6	56.8	55.7	50.2	44.4	40.0	38.7
57,5°	1485.1	1423.5	1381.8	1428.6	1344.5	1257.2	49.4	51.6	51.0	45.9	41.3	38.5	37.7
60,0°	1560.9	1478.1	1403.6	1437.6	1352.2	1262.3	44.3	47.2	45.2	41.3	38.6	36.8	36.7
62,5°	1443.4	1316.9	1237.3	1277.1	1214.8	1141.6	40.2	43.6	41.2	38.2	38.0	34.7	34.7
65,0°	1162.2	977.8	893.2	903.2	851.1	796.1	35.6	39.6	37.9	35.1	37.7	33.5	32.3
67,5°	745.1	572.2	483.6	445.3	393.9	356.5	31.0	34.3	34.0	32.0	34.0	30.2	29.8
70,0°	403.1	275.5	207.6	185.5	164.2	149.9	27.1	28.2	29.4	27.6	28.2	25.8	26.1
72,5°	188.8	127.1	103.1	92.6	82.9	76.5	22.7	23.9	24.0	22.5	22.0	21.2	21.5
75,0°	91.4	68.9	61.6	56.0	49.6	47.0	17.3	17.3	17.5	17.6	18.7	19.3	17.4
77,5°	45.5	41.6	38.0	36.2	30.1	29.3	11.8	11.7	12.1	13.3	13.4	16.2	13.8
80,0°	20.0	22.0	21.6	21.0	17.8	16.6	7.6	7.9	8.2	8.4	9.1	9.7	8.9
82,5°	9.7	9.9	9.9	10.6	9.1	8.5	4.3	4.8	5.2	5.3	5.3	4.8	4.8
85,0°	3.4	3.5	3.5	3.8	3.7	3.6	2.0	2.2	2.6	2.5	2.5	2.2	2.4
87,5°	1.3	1.3	1.4	1.4	1.5	1.5	0.7	0.7	0.8	0.9	1.0	1.1	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11		Order number: 5XA779728T02FB EAN: 4069025145246										LP number 59517_312	
Table of values for luminous intensities										Maximum luminous intensity		sİteco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm		
0,0°	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	0.2	0.2
2,5°	146.7	146.1	145.6	145.1	144.8	144.6	144.5	144.2	144.1	144.3	144.3	1.9	2.1
5,0°	140.4	139.4	138.7	138.0	137.6	137.3	137.0	136.8	136.7	136.8	136.8	3.8	5.9
7,5°	133.9	133.0	132.2	131.6	131.0	130.7	130.4	130.2	129.9	130.0	130.0	5.8	11.7
10,0°	127.6	126.9	126.0	125.1	124.4	124.1	123.8	123.5	123.5	123.5	123.5	7.8	19.5
12,5°	120.3	119.5	118.9	118.3	117.8	117.5	117.2	117.1	116.9	117.0	116.9	9.9	29.4
15,0°	112.8	112.0	111.7	111.7	111.9	111.5	109.2	106.3	104.1	102.8	102.3	12.0	41.5
17,5°	105.4	104.8	104.4	100.3	95.6	93.4	92.2	91.6	91.3	91.2	91.3	14.2	55.7
20,0°	99.1	93.9	87.9	86.9	86.8	86.0	85.0	84.2	84.0	84.3	84.4	16.2	71.9
22,5°	84.6	80.6	80.5	80.1	79.0	77.2	75.5	74.4	74.3	74.7	75.0	18.1	90.0
25,0°	74.4	74.2	73.7	72.7	70.7	68.1	65.9	65.0	65.4	66.1	66.2	19.7	109.6
27,5°	67.7	67.3	66.5	65.5	63.5	60.7	58.7	58.5	59.3	60.6	61.8	21.1	130.8
30,0°	62.5	61.8	60.9	59.9	58.2	55.7	54.1	54.0	55.0	57.5	59.1	22.7	153.4
32,5°	59.1	58.1	56.8	55.7	53.9	51.4	50.2	50.6	52.7	54.2	55.1	24.6	178.0
35,0°	55.4	54.0	52.7	51.5	50.2	48.8	48.4	50.2	51.3	52.2	53.5	26.8	204.8
37,5°	52.0	50.9	49.8	49.0	48.3	47.5	48.0	49.5	50.0	51.4	52.7	28.9	233.8
40,0°	49.6	48.7	48.4	47.4	46.9	46.9	47.8	48.7	49.5	50.5	51.9	31.2	264.9
42,5°	47.9	47.0	46.8	46.3	46.9	47.0	47.5	48.1	48.7	50.0	51.3	34.4	299.4
45,0°	47.1	45.9	46.2	46.1	47.1	47.4	47.1	47.3	47.6	48.7	49.8	39.5	338.9
47,5°	45.0	44.4	44.4	45.0	46.0	46.5	46.1	46.2	46.2	46.7	47.5	46.0	384.8
50,0°	42.2	42.4	43.1	44.4	45.1	46.4	46.2	45.9	45.3	45.1	45.5	54.2	439.1
52,5°	39.9	40.9	42.7	43.5	44.4	46.3	46.6	45.5	44.6	44.2	44.4	63.3	502.4
55,0°	38.6	39.7	41.9	42.7	44.3	45.5	46.0	44.6	43.9	43.7	43.7	73.4	575.8
57,5°	37.7	38.8	40.3	42.6	43.6	44.1	44.3	43.7	43.2	44.3	44.2	83.8	659.6
60,0°	37.1	37.8	39.0	41.9	41.9	42.0	42.3	42.8	42.2	43.6	43.8	88.5	748.1
62,5°	35.3	36.0	37.3	38.7	39.6	39.7	40.2	40.6	39.9	40.7	40.9	83.1	831.2
65,0°	32.7	34.0	35.1	35.5	36.2	38.3	38.5	38.9	38.5	37.7	37.8	66.0	897.2
67,5°	30.0	31.7	32.4	32.7	33.6	36.0	36.4	37.5	37.3	36.0	35.7	41.6	938.7
70,0°	26.7	28.8	28.1	29.0	30.7	32.1	33.6	35.6	35.1	34.4	34.3	24.3	963.1
72,5°	22.7	24.0	22.5	23.6	25.5	27.4	29.7	32.1	32.0	31.6	31.5	14.7	977.8
75,0°	17.5	18.2	18.7	19.6	21.2	23.0	25.5	27.2	26.0	23.6	22.4	9.7	987.5
77,5°	13.1	13.8	14.6	15.7	16.8	18.1	20.1	19.5	17.1	16.5	16.4	6.1	993.6
80,0°	8.7	10.1	10.8	11.9	12.2	12.7	13.4	12.7	12.1	12.1	12.0	3.3	996.9
82,5°	5.4	6.5	7.4	8.0	8.4	8.6	8.9	8.6	8.2	8.1	8.1	1.9	998.8
85,0°	2.7	3.4	4.1	4.1	4.2	4.5	4.3	4.1	4.1	4.2	4.3	0.8	999.6
87,5°	1.4	1.5	1.7	1.8	2.0	2.2	2.3	2.4	2.5	2.6	2.6	0.4	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779728T02FB EAN: 4069025145246	LP number 59517_312
Dimming levels table environmental temperature: 10°C		

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	----	----	----
95	238	201313	1618.1
90	222	190760	1507.3
85	206	179755	1396.1
80	192	169868	1300.1
75	177	158767	1197.3
70	163	148326	1101.8
65	149	137375	1007.5
60	136	126923	919.4
55	124	116948	838.7
50	111	105992	752.1
45	99	95493	671.9
40	87	84825	592.3
35	75	73863	513.0
30	64	63848	441.3
25	53	53036	368.2
20	42	42413	297.6
15	31	31781	228.4
10	21	21616	164.1
5	10	10521	84.3
1	2	1966	27.7

Dimming levels table	environmental temperature: 25°C
----------------------	---------------------------------

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	----	----	----
95	----	----	----
90	----	----	----
85	----	----	----
85	----	----	----
80	189	162431	1270.2
75	175	152565	1174.8
70	161	142558	1079.6
65	147	132061	986.0
60	134	121949	898.7
55	121	111628	812.1
50	109	101776	732.7
45	97	91652	653.1
40	85	81223	574.2
35	74	71529	502.1
30	62	60427	424.2
25	52	51193	358.4
20	41	40850	288.3
15	30	30324	220.0
10	20	20377	154.6
5	10	10403	83.5
1	2	1946	27.4

Photometric test report

Family Floodlight FL11	Order number: 5XA779728T02FB EAN: 4069025145246	LP number 59517_312
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
10.0	211910.0	1737.6
25.0	173170.0	1379.6