

Photometric test report

Family
Streetlight 11 micro LED



Order number: 5XC1B41F08CE
EAN: 4058352557419

Version

Optic

Cover

Lamps

Controlgear

Rated values

post-top or side-entry mounting

asymmetric, extremely wide distribution (ST0.5a)

transparent, PMMA

LED 4000 K | CRI ≥ 70


ECG SITECO iQ

Net luminous flux = 1940 lm
Power consumption = 12.6 W
Luminous efficacy = 154 lm/W

LP number
59318_224

serial
documentation
14.02.2025


siteco

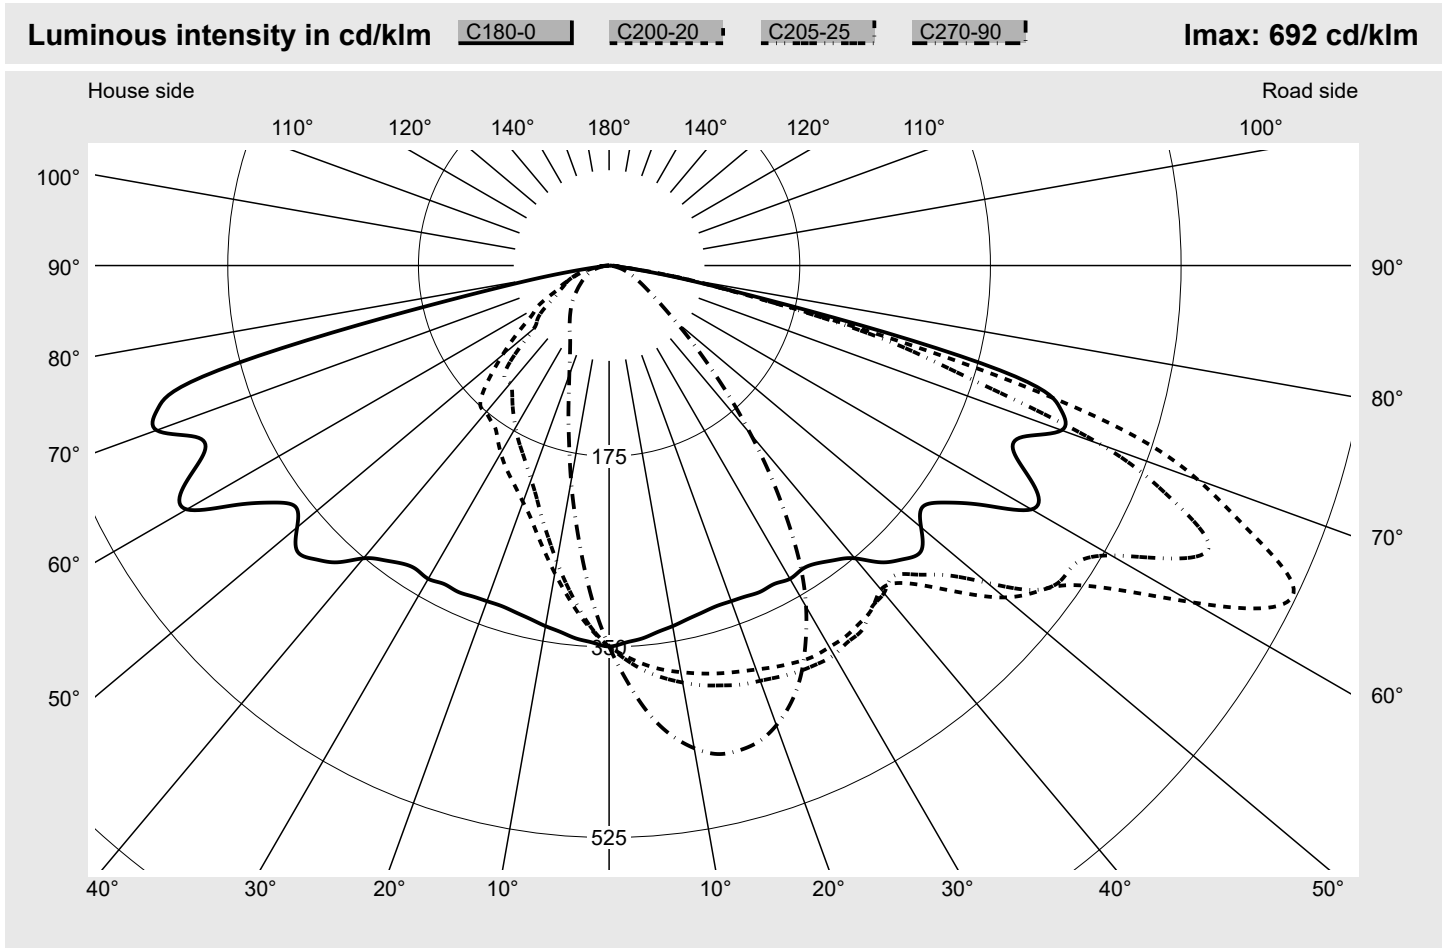

Luminaire output ratios		Luminous intensity class acc. to EN13201-2	
Eta	100.0%	Class:	G3
Eta 0° - 90°	100.0%	Imax 70°	625.9
Eta 90° - 180°	0.0%	Imax 80°	83.0
		Imax 90°	0.0
		Imax >90°	0.0
		Imax >95°	0.0
Measurement conditions			
DIN EN 13032 and DIN 5032			

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1B41F08CE EAN: 4058352557419	LP number 59318_224
Envelope curve in cd/klm KMK 65° KMK 62.5° KMK 60° KMK 57,5°		sit eco

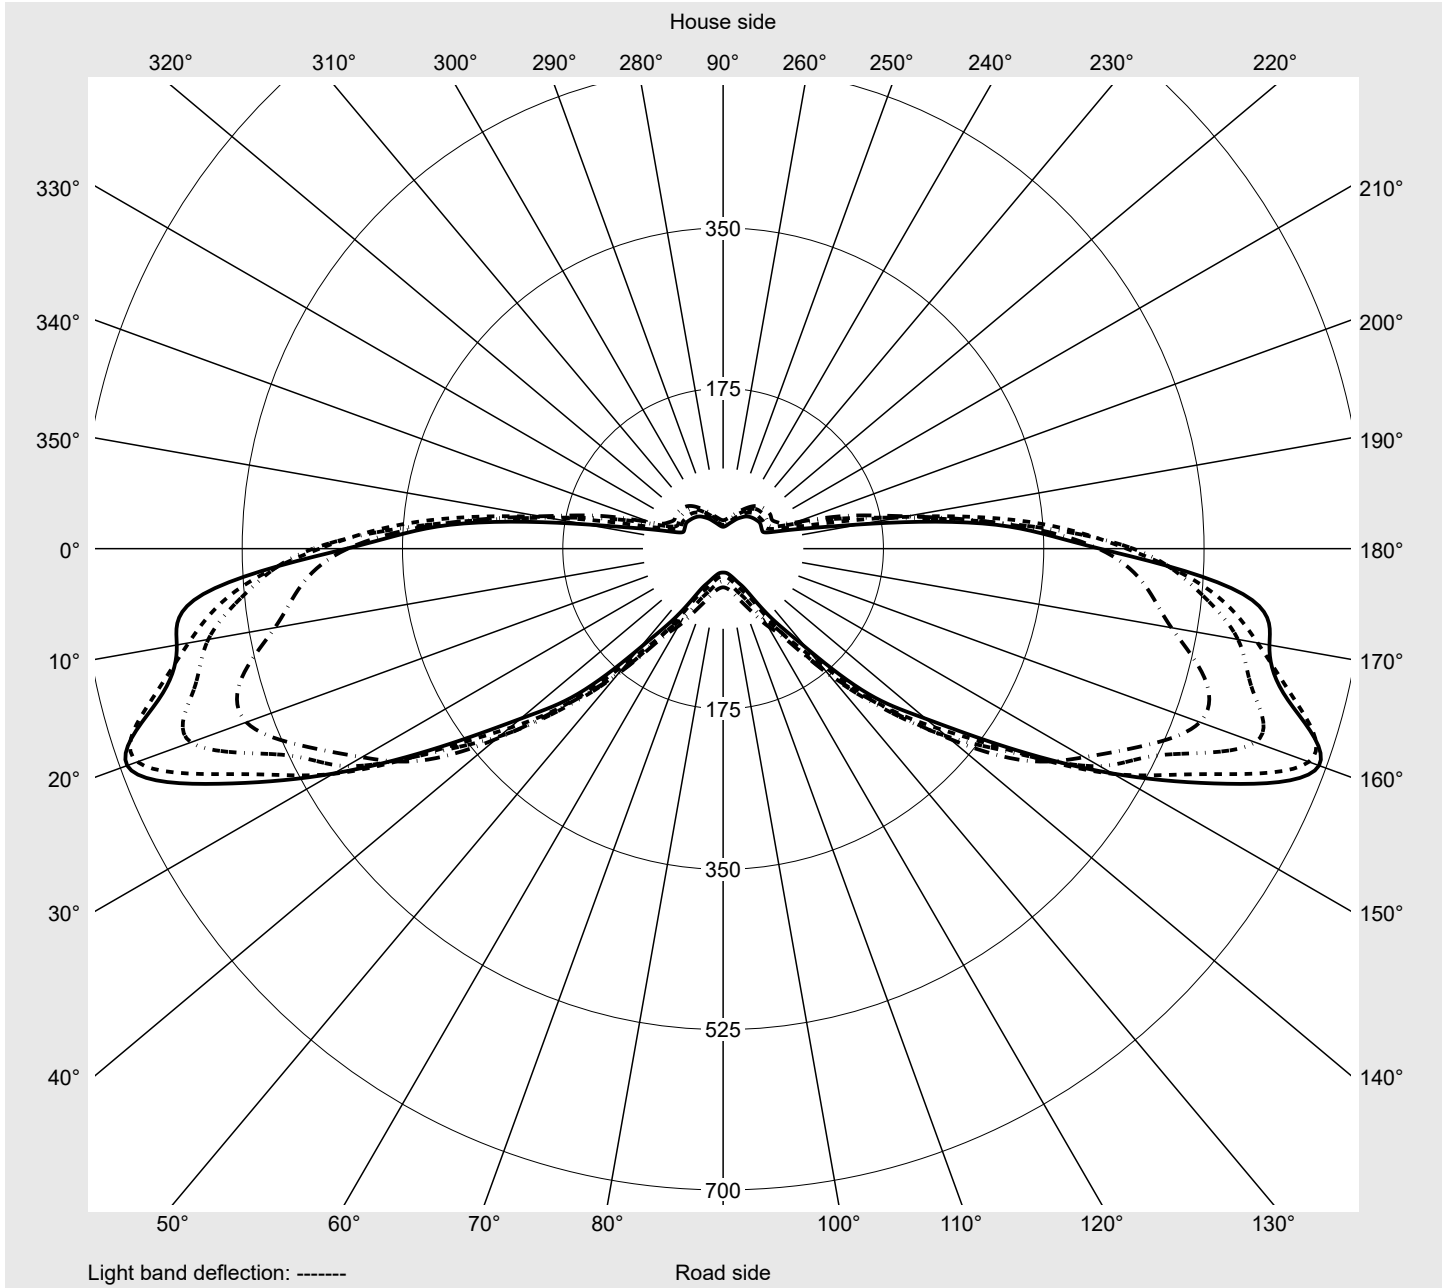

Photometric test report

Family Streetlight 11 micro LED				Order number: 5XC1B41F08CE EAN: 4058352557419								LP number 59318_224			
Table of values for luminous intensities										Maximum luminous intensity				siteco	
C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°		
γ	Luminous intensity in cd/klm														
0,0°	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6		
2,5°	346.4	349.6	352.5	355.6	359.1	362.3	365.7	368.3	370.4	373.0	374.6	376.5	377.7		
5,0°	343.7	349.5	355.4	361.4	367.3	373.2	379.3	384.2	389.4	393.9	397.5	401.2	403.7		
7,5°	339.3	347.9	356.6	365.3	374.0	381.6	389.6	396.7	403.5	409.5	414.5	419.1	422.7		
10,0°	336.1	347.6	358.5	368.8	378.9	388.6	397.8	406.7	414.0	421.1	427.2	432.1	436.4		
12,5°	332.4	346.9	360.1	372.2	383.5	394.6	404.7	413.6	421.9	429.5	436.0	441.3	445.3		
15,0°	329.7	346.1	361.1	375.1	387.5	398.9	409.1	418.6	426.9	434.3	439.8	445.0	448.5		
17,5°	327.7	346.6	363.6	378.2	391.0	403.2	413.0	422.0	429.0	435.9	440.7	444.1	447.4		
20,0°	327.8	348.5	366.7	382.0	394.6	405.6	414.5	422.7	429.0	434.0	437.7	440.1	442.2		
22,5°	328.6	351.4	371.1	386.5	398.7	408.5	416.3	422.4	426.4	429.5	431.1	432.2	432.2		
25,0°	330.0	353.9	374.6	390.4	402.2	411.2	417.2	421.5	422.5	422.4	421.0	419.7	417.9		
27,5°	329.2	355.3	376.7	393.2	404.8	412.6	417.4	418.9	416.6	412.7	408.4	403.2	398.9		
30,0°	332.0	357.6	377.2	392.6	404.4	412.7	415.4	414.5	410.0	402.0	393.4	384.1	376.1		
32,5°	330.3	355.7	377.8	395.1	403.8	409.0	411.6	407.9	400.0	388.7	376.1	362.7	350.9		
35,0°	333.5	360.4	379.2	389.4	400.8	406.6	403.3	397.8	387.0	372.6	356.3	339.2	323.1		
37,5°	340.7	359.0	375.7	391.6	396.7	395.7	397.0	383.6	370.6	353.8	334.5	314.1	294.9		
40,0°	350.8	370.9	384.9	388.1	388.2	392.5	380.4	371.0	349.7	331.8	310.7	288.4	266.5		
42,5°	369.4	382.5	392.4	395.9	395.2	386.4	375.9	352.4	330.3	306.0	284.3	261.6	238.7		
45,0°	381.3	398.3	412.4	414.5	416.8	401.2	377.6	347.0	317.0	285.5	257.2	233.4	210.0		
47,5°	388.2	413.4	432.8	440.7	445.8	420.7	394.8	353.5	305.8	272.4	237.0	205.3	183.3		
50,0°	373.8	408.9	441.6	467.0	473.9	452.9	419.2	363.7	305.3	257.9	216.6	184.5	157.1		
52,5°	363.2	400.3	450.6	489.7	492.6	489.2	445.0	382.0	306.8	245.3	196.9	157.3	132.9		
55,0°	379.3	415.1	461.7	514.1	511.6	505.2	458.8	398.4	321.4	242.5	179.1	137.3	111.7		
57,5°	409.8	462.5	496.9	543.9	553.9	508.2	455.3	403.4	323.0	240.0	177.8	122.2	97.4		
60,0°	447.6	519.5	570.7	598.5	618.2	532.1	474.8	389.0	318.7	246.0	178.2	113.8	87.8		
62,5°	440.6	534.6	592.5	647.7	680.4	582.3	491.8	384.6	304.7	237.6	160.7	112.9	67.2		
65,0°	411.0	569.8	605.6	638.3	692.3	607.3	490.8	377.8	288.9	224.2	142.0	93.7	56.6		
67,5°	410.9	569.1	586.8	628.0	635.6	557.8	440.5	356.7	283.8	204.7	125.7	67.7	43.7		
70,0°	442.0	555.6	565.8	625.9	575.2	480.6	332.4	279.2	238.2	183.8	113.9	57.6	34.9		
72,5°	433.7	537.3	588.0	558.6	482.4	351.9	212.6	171.4	170.7	153.5	102.6	45.2	26.7		
75,0°	371.4	397.9	481.8	383.0	304.1	260.7	173.2	132.3	98.5	83.5	58.2	32.8	18.6		
77,5°	168.9	238.4	205.4	158.3	144.5	144.1	120.6	97.3	71.0	56.5	28.1	20.4	13.6		
80,0°	63.8	83.0	54.2	76.5	72.1	71.7	61.2	43.7	28.6	19.3	16.8	14.2	9.8		
82,5°	13.4	13.1	15.5	22.1	20.5	17.2	15.0	12.9	10.3	8.6	7.7	7.0	6.2		
85,0°	7.9	8.1	8.4	8.4	8.1	7.7	7.0	6.4	5.8	5.3	4.7	4.0	3.3		
87,5°	4.1	4.2	4.4	4.2	4.1	4.0	3.6	3.3	3.0	2.8	2.4	1.9	1.5		
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1B41F08CE EAN: 4058352557419	LP number 59318_224
------------------------------------	--	------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6
2,5°	378.5	379.5	380.4	381.6	382.0	382.2	343.5	340.8	338.4	336.3	335.0	333.4	330.8
5,0°	405.6	407.4	409.2	411.0	411.9	412.1	337.1	331.3	325.5	320.7	316.1	311.3	306.5
7,5°	426.4	428.9	431.5	433.3	434.7	434.5	330.2	320.5	311.6	303.5	296.0	288.5	281.2
10,0°	439.9	443.4	446.1	448.5	449.8	449.8	323.3	310.6	298.5	286.8	276.1	266.4	256.6
12,5°	448.6	452.5	455.2	457.1	458.7	459.2	316.4	300.7	285.1	270.4	256.6	244.2	231.6
15,0°	451.7	455.3	457.5	459.5	461.0	460.7	311.3	292.0	272.7	255.2	239.0	224.0	209.9
17,5°	450.3	452.8	454.8	456.7	457.1	457.9	306.5	284.1	262.2	241.4	222.3	205.1	189.3
20,0°	444.1	445.8	446.9	448.4	448.5	449.0	304.4	279.0	254.2	231.0	209.2	189.9	172.7
22,5°	432.7	432.5	433.5	434.7	434.4	435.2	302.9	275.4	248.1	222.0	198.2	176.9	158.3
25,0°	416.7	415.4	414.7	415.6	415.7	416.0	301.7	271.7	242.5	214.3	188.8	166.2	147.0
27,5°	394.7	392.9	391.0	391.0	390.6	390.5	299.3	267.4	236.6	206.9	180.4	156.7	137.0
30,0°	370.0	365.9	363.8	362.4	361.8	361.5	298.6	261.6	228.6	198.8	171.7	148.3	128.8
32,5°	341.3	335.2	331.9	329.8	327.5	326.9	295.4	254.6	220.6	190.1	163.1	140.1	121.1
35,0°	310.0	301.2	295.1	291.2	287.1	285.5	296.0	252.1	215.2	182.1	154.6	131.7	113.8
37,5°	279.0	266.9	258.3	251.9	246.0	243.8	303.4	259.2	214.6	178.8	146.2	123.6	107.4
40,0°	247.7	232.6	220.9	211.8	205.0	202.3	303.1	260.0	210.1	176.1	141.2	119.5	101.2
42,5°	218.0	200.1	185.7	174.6	167.0	163.9	311.3	266.6	211.9	174.8	141.3	110.8	96.1
45,0°	188.3	168.7	153.2	140.2	132.3	129.3	320.6	267.8	211.5	163.2	132.8	99.0	91.1
47,5°	161.2	142.1	125.7	112.4	104.3	101.6	313.5	249.2	197.2	145.5	110.9	92.7	85.6
50,0°	136.0	117.3	101.4	89.0	81.6	79.2	299.9	224.1	169.8	127.8	90.3	84.7	80.5
52,5°	114.2	96.1	81.3	70.5	64.7	62.9	283.5	206.5	150.4	111.3	83.4	77.6	75.0
55,0°	94.4	78.5	65.6	56.9	52.5	51.1	285.4	201.3	140.7	95.7	77.0	70.0	69.0
57,5°	77.4	63.2	53.1	46.6	43.4	42.2	309.7	203.3	138.1	83.2	67.0	62.1	63.3
60,0°	63.7	51.8	44.0	39.0	36.5	35.6	312.6	194.5	125.2	76.3	57.6	56.2	57.5
62,5°	51.3	42.4	36.4	32.5	30.9	30.3	335.4	199.0	100.5	63.9	52.2	52.2	52.9
65,0°	42.1	34.9	30.3	27.5	26.3	26.1	299.1	153.0	81.3	51.9	47.0	47.9	48.9
67,5°	34.0	28.3	24.9	23.1	22.2	22.0	270.2	117.3	69.3	46.7	43.4	43.6	43.7
70,0°	27.2	22.9	20.3	19.2	18.5	18.3	266.4	101.7	64.7	39.1	39.6	39.3	38.9
72,5°	20.3	18.0	16.4	15.6	15.1	15.0	222.7	100.6	48.5	33.1	35.0	35.1	34.5
75,0°	15.6	14.0	12.9	12.2	11.9	11.9	204.4	96.9	30.3	28.2	30.1	30.5	30.0
77,5°	11.9	10.4	9.8	9.0	8.6	8.4	131.9	42.0	20.5	21.9	24.3	25.2	25.6
80,0°	8.4	7.4	6.5	6.1	5.6	5.5	55.2	23.9	14.0	15.6	17.5	18.8	19.4
82,5°	5.5	4.6	4.0	3.6	3.4	3.2	11.0	9.2	8.7	9.3	10.2	11.4	12.6
85,0°	2.8	2.4	1.9	1.8	1.6	1.5	7.1	6.2	5.5	4.9	4.4	4.0	3.8
87,5°	1.2	0.9	0.8	0.6	0.5	0.5	3.9	3.5	3.1	2.9	2.6	2.4	2.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED				Order number: 5XC1B41F08CE EAN: 4058352557419								LP number 59318_224			
Table of values for luminous intensities												Maximum luminous intensity		sīteco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone		
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm			
0,0°	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	349.6	0.5	0.5		
2,5°	328.8	326.6	324.6	322.7	320.6	319.1	317.2	316.1	314.6	313.6	313.3	4.2	4.7		
5,0°	301.9	297.4	293.1	289.4	285.6	282.2	279.6	277.4	275.4	274.0	273.4	8.2	12.9		
7,5°	274.3	267.7	261.9	256.5	251.6	247.2	243.4	240.4	237.7	235.8	235.4	12.1	25.0		
10,0°	247.0	238.5	231.2	224.7	219.1	214.1	209.7	206.2	203.2	201.2	200.9	15.7	40.7		
12,5°	220.6	210.6	202.0	194.5	188.2	182.9	178.6	174.7	171.8	170.0	169.3	19.1	59.8		
15,0°	197.1	185.7	176.4	168.6	162.0	156.7	152.5	148.9	146.3	144.8	144.3	22.2	81.9		
17,5°	175.6	163.5	153.7	145.8	139.3	134.3	130.2	127.0	124.6	123.2	122.9	25.0	107.0		
20,0°	158.0	145.7	135.8	127.9	122.0	117.0	113.4	110.5	108.5	107.3	106.8	27.7	134.7		
22,5°	142.9	130.6	120.7	113.3	107.6	103.2	99.8	97.4	95.5	94.5	94.2	30.2	164.9		
25,0°	131.2	118.8	109.5	102.2	97.0	93.1	90.0	87.8	86.1	85.0	84.7	32.4	197.3		
27,5°	121.4	109.5	100.1	93.5	88.6	85.1	82.2	80.2	78.7	77.8	77.4	34.3	231.5		
30,0°	113.4	101.5	93.2	87.3	82.7	79.3	76.8	74.6	73.1	72.4	72.0	35.8	267.3		
32,5°	106.3	95.4	87.6	82.2	78.2	74.9	72.1	70.0	68.4	67.6	67.6	36.9	304.2		
35,0°	100.3	90.3	83.4	78.4	74.5	71.0	68.3	65.8	64.1	63.1	63.1	37.6	341.9		
37,5°	95.5	86.9	80.6	75.8	71.7	68.0	64.8	62.3	60.4	59.2	59.0	38.1	380.0		
40,0°	91.6	84.2	78.6	73.7	69.3	65.2	61.7	58.8	56.8	55.6	55.2	38.3	418.3		
42,5°	87.8	82.0	77.2	72.1	67.1	62.8	58.8	55.6	53.4	52.1	51.6	38.6	456.9		
45,0°	84.7	80.0	75.6	70.3	65.2	60.2	55.7	52.4	50.0	48.7	48.1	39.1	495.9		
47,5°	81.4	77.8	73.7	68.4	63.0	57.5	52.6	49.2	46.7	45.1	44.4	39.4	535.4		
50,0°	77.9	74.8	71.1	66.1	60.5	54.8	49.7	45.7	43.0	41.3	40.7	39.5	574.8		
52,5°	73.9	71.9	68.0	63.1	57.8	52.0	46.8	42.8	39.8	37.9	37.2	39.7	614.5		
55,0°	68.9	67.8	64.6	59.9	54.8	48.9	44.0	39.9	37.0	35.0	34.1	40.5	655.0		
57,5°	63.4	62.6	60.5	56.5	51.2	45.9	41.2	37.1	34.1	31.9	31.1	41.9	696.9		
60,0°	58.0	57.4	56.2	52.7	47.5	42.6	38.2	34.5	31.4	29.3	28.6	44.1	741.0		
62,5°	52.4	52.0	50.9	48.0	43.6	39.2	35.1	31.5	28.8	26.8	26.1	45.4	786.4		
65,0°	48.1	46.8	45.2	42.9	39.3	35.9	32.0	28.9	26.3	24.6	23.9	44.7	831.2		
67,5°	43.3	41.9	39.9	37.0	34.7	32.1	29.2	26.5	24.0	22.3	21.7	42.4	873.6		
70,0°	38.3	36.8	35.1	32.0	30.0	28.4	26.5	24.0	21.7	20.1	19.5	39.3	912.9		
72,5°	33.5	32.5	30.4	27.7	26.0	24.8	23.3	21.2	19.1	17.7	17.2	34.1	947.1		
75,0°	29.2	28.2	26.5	24.1	22.3	20.8	19.7	18.0	16.2	14.8	14.5	26.1	973.2		
77,5°	25.1	24.6	22.6	20.4	18.7	17.2	15.8	14.8	13.3	11.9	11.4	14.9	988.0		
80,0°	19.5	20.1	18.9	16.7	15.2	13.7	12.4	11.1	9.8	8.6	8.2	7.2	995.3		
82,5°	12.6	12.9	13.0	12.5	11.6	10.3	8.9	7.5	6.1	5.3	5.0	2.8	998.1		
85,0°	3.9	4.4	5.0	5.6	5.6	5.5	4.8	3.7	2.9	2.4	2.2	1.3	999.4		
87,5°	1.9	1.7	1.4	1.2	0.9	0.8	0.8	0.7	0.3	0.2	0.2	0.6	1000.0		
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0		

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1B41F08CE EAN: 4058352557419	LP number 59318_224
Dimming levels table		environmental temperature: 25°C
		siteco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	1940	12.6	12.9	12.8
95	241	252	1841	12.0	12.3	12.2
90	229	250	1749	11.4	11.7	11.6
85	216	248	1650	10.8	11.0	10.9
80	203	246	1550	10.1	10.4	10.2
75	190	243	1451	9.6	9.8	9.7
70	178	241	1360	9.0	9.2	9.1
65	165	238	1260	8.4	8.6	8.5
60	152	235	1161	7.8	8.0	7.9
55	140	232	1069	7.3	7.5	7.4
50	127	229	970	6.8	6.9	6.8
45	114	225	871	6.2	6.3	6.2
40	102	221	779	5.7	5.8	5.8
35	89	216	680	5.1	5.2	5.2
30	76	210	580	4.6	4.7	4.6
25	63	203	481	4.1	4.1	4.1
24	62	202	474	4.0	4.1	4.0