

Photometric test report

Family Streetlight 11 micro LED

Order number: 5XC1N51F08CE
EAN: 4058352557716

LP number
59457_491



Version	post-top or side-entry mounting
Optic	asymmetric, extreme wide distribution with Back Light Control (ST1.0aB)
Cover	transparent, PMMA
Lamps	LED 3000 K CRI ≥ 70
Controlgear	ECG SITECO iQ
Rated values	Net luminous flux = 1580 lm Power consumption = 12.6 W Luminous efficacy = 125.4 lm/W

serial
documentation
14.02.2025

siteco

Luminous intensity in cd/klm


C180-0

C195-15

C200-20

C270-90

Imax: 754 cd/klm

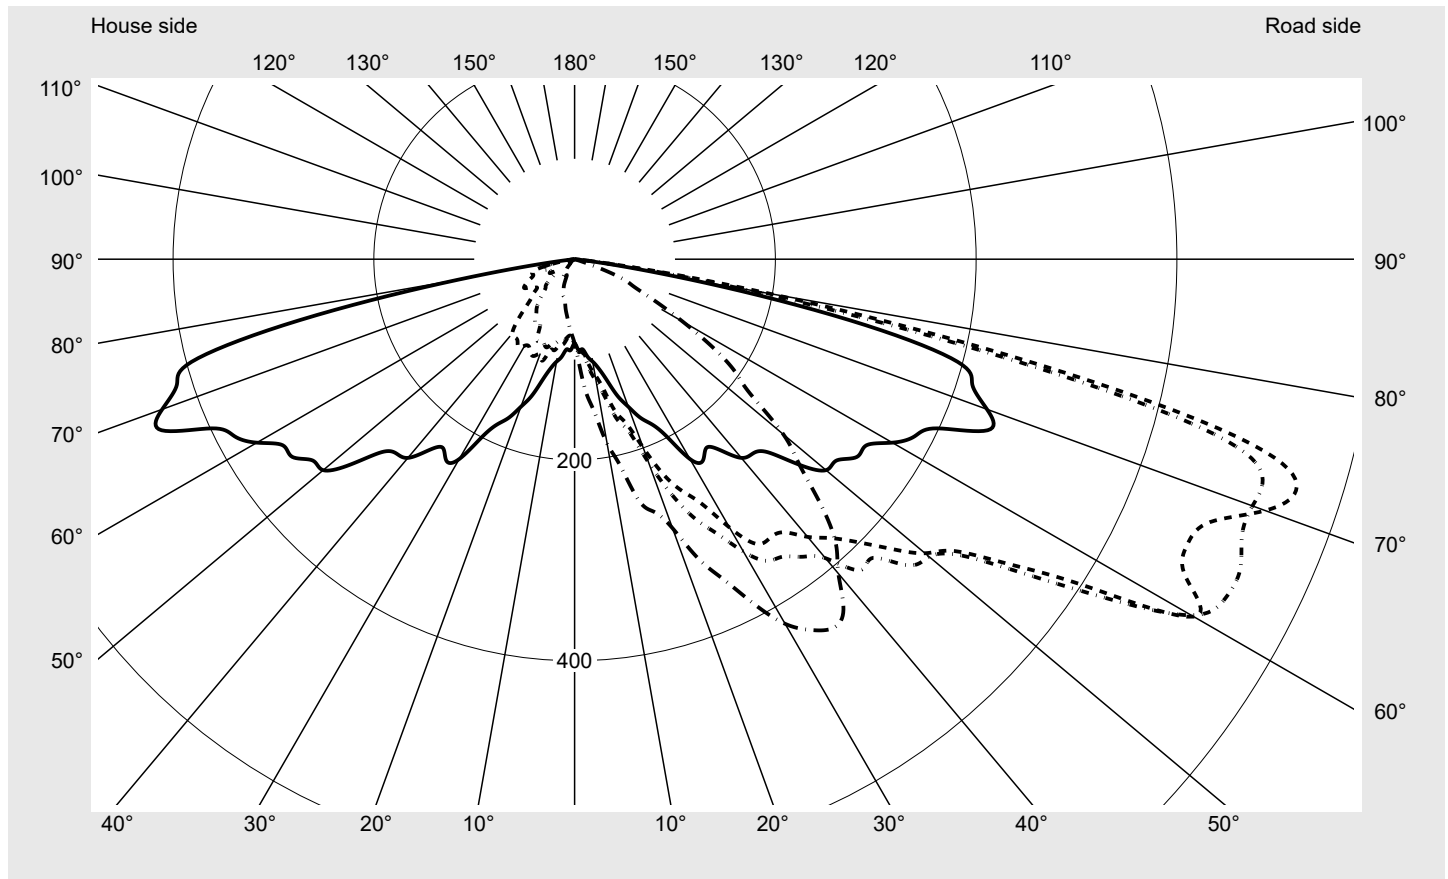

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Measurement conditions


DIN EN 13032 and DIN 5032

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	742.9
Imax 80°	194.9
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1N51F08CE EAN: 4058352557716	LP number 59457_491
Envelope curve in cd/klm KMK 72.5° KMK 70° KMK 67.5° KMK 65°		sit eco

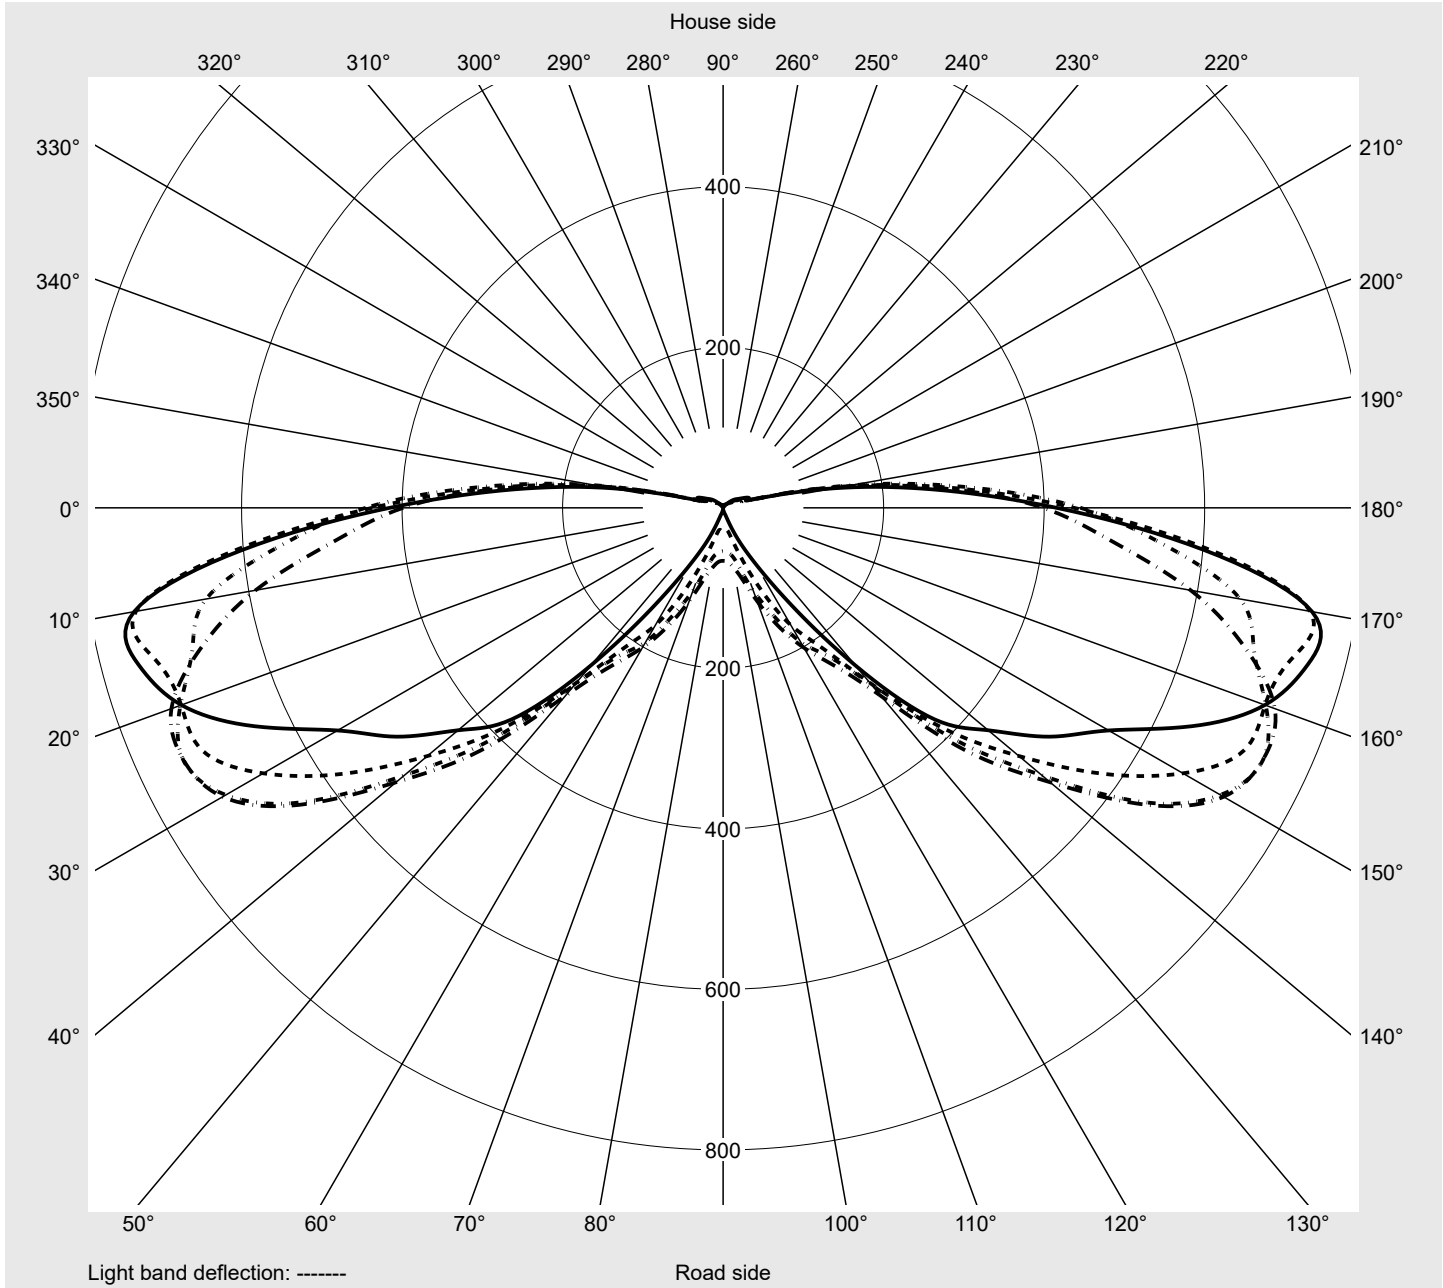

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1N51F08CE EAN: 4058352557716	LP number 59457_491
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9
2,5°	90.7	90.4	89.6	89.6	92.6	95.8	96.7	97.7	98.9	99.7	99.4	98.3	98.9
5,0°	90.1	90.9	91.0	90.8	93.4	99.4	105.1	110.0	112.1	113.3	116.6	120.2	123.6
7,5°	97.8	100.7	102.4	105.0	109.4	114.0	119.6	126.7	130.4	132.5	135.6	139.9	145.0
10,0°	103.6	106.4	110.5	116.9	123.4	128.7	132.7	139.3	141.8	143.6	147.6	151.3	157.4
12,5°	111.8	117.3	123.2	132.2	141.1	147.9	152.1	158.1	165.3	172.9	180.1	185.3	193.8
15,0°	125.2	133.6	145.8	157.3	166.0	174.5	179.6	187.6	195.8	203.8	214.1	219.5	222.2
17,5°	143.2	155.5	164.5	171.9	180.0	189.8	197.5	200.1	207.5	218.4	228.9	237.2	238.4
20,0°	156.4	173.2	183.5	200.0	215.7	230.8	239.2	240.9	243.5	246.5	255.5	265.9	271.5
22,5°	170.8	187.0	210.2	232.7	254.6	270.3	278.3	280.9	284.4	287.3	295.1	302.1	306.7
25,0°	181.3	201.9	229.5	255.3	285.9	298.3	297.6	301.1	310.9	320.5	327.1	336.2	345.9
27,5°	199.6	223.0	249.0	275.0	308.8	330.8	334.2	332.9	340.4	347.8	346.0	350.2	361.3
30,0°	229.9	263.1	284.9	308.6	336.3	357.1	363.1	360.8	363.2	367.2	369.3	373.6	377.3
32,5°	237.9	268.2	303.2	336.2	356.3	370.3	380.8	388.7	395.3	396.8	395.5	398.8	401.1
35,0°	229.2	258.8	302.6	339.1	361.7	384.4	397.9	409.4	417.6	415.7	411.6	408.9	410.5
37,5°	240.5	269.2	303.8	342.9	373.6	395.9	415.8	429.1	425.2	416.6	408.2	393.8	398.7
40,0°	258.4	286.2	322.8	361.1	388.8	409.4	426.1	433.8	426.7	417.1	404.6	397.1	398.3
42,5°	262.6	307.8	341.9	376.7	420.2	432.6	432.9	449.5	450.5	420.8	402.7	394.6	390.9
45,0°	271.8	332.1	375.9	398.6	420.7	449.8	466.6	471.6	458.9	428.9	404.4	386.4	378.1
47,5°	302.7	373.9	405.2	426.9	451.5	472.8	491.1	480.4	458.4	436.1	412.4	380.6	357.9
50,0°	327.0	400.8	432.0	455.7	461.1	473.9	487.7	483.4	462.4	434.6	408.1	362.7	325.3
52,5°	329.2	407.3	456.4	477.7	484.5	499.6	505.3	497.0	463.5	423.3	381.5	334.3	311.5
55,0°	343.4	414.5	489.4	530.3	545.3	562.1	551.7	525.4	475.1	419.2	362.9	303.1	278.0
57,5°	344.9	447.4	527.2	608.8	628.7	618.3	599.7	560.8	488.5	413.0	343.5	277.3	248.3
60,0°	365.5	499.4	616.7	712.2	709.4	673.8	648.7	595.7	500.0	408.6	330.9	277.1	243.0
62,5°	382.0	492.2	604.2	686.5	731.0	714.9	688.2	618.4	525.8	415.5	317.6	258.9	222.0
65,0°	398.7	488.0	591.6	673.3	731.6	742.3	720.1	645.3	532.0	427.9	306.2	239.1	201.3
67,5°	445.3	556.0	654.2	684.7	719.6	742.5	715.5	639.3	518.7	408.5	288.1	224.4	192.8
70,0°	437.2	611.3	742.9	732.2	718.6	715.8	661.6	577.7	481.2	388.9	284.8	211.1	168.8
72,5°	415.4	601.1	745.2	754.3	718.3	643.9	554.8	497.1	431.2	372.9	256.3	146.8	79.9
75,0°	395.0	544.9	656.0	682.3	642.3	531.3	429.6	403.8	358.9	245.3	111.8	36.6	10.0
77,5°	280.5	372.5	430.3	442.8	397.4	333.4	289.5	230.9	140.4	47.1	7.8	0.0	0.0
80,0°	118.6	154.3	189.4	194.9	165.3	140.7	101.2	41.4	8.9	0.0	0.0	0.0	0.0
82,5°	22.3	28.1	36.5	41.6	37.9	27.0	8.5	0.0	0.0	0.0	0.0	0.0	0.0
85,0°	0.0	0.0	0.0	0.1	0.2	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1N51F08CE EAN: 4058352557716	LP number 59457_491
------------------------------------	--	------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9
2,5°	98.6	99.1	101.0	101.8	103.4	104.7	86.5	82.9	78.7	76.7	75.0	73.9	74.2
5,0°	124.8	126.6	127.6	127.5	131.0	134.0	86.1	81.9	78.6	77.6	76.4	73.4	71.8
7,5°	147.8	149.0	148.4	151.1	154.5	154.8	94.1	89.6	85.3	81.2	77.6	75.0	71.4
10,0°	165.9	172.0	175.7	184.2	188.3	186.6	98.1	92.3	86.7	81.0	76.7	73.6	68.8
12,5°	202.3	207.5	211.3	213.9	213.7	211.2	104.3	98.4	92.9	85.1	78.2	71.2	63.9
15,0°	225.4	231.4	234.6	245.0	251.8	249.7	113.0	102.9	93.9	86.9	79.3	68.6	59.2
17,5°	239.2	244.6	249.2	255.0	260.6	264.0	129.0	117.8	105.9	92.1	77.5	68.1	58.0
20,0°	275.0	280.6	283.6	284.2	284.2	285.2	138.4	118.6	101.1	89.2	75.4	65.6	58.1
22,5°	310.7	314.2	315.9	318.0	321.4	323.4	151.1	127.7	104.3	87.8	75.3	63.7	53.3
25,0°	341.5	337.6	342.8	348.8	350.3	352.4	160.0	132.2	103.5	88.2	70.6	57.9	50.1
27,5°	374.8	380.5	383.8	387.9	388.0	387.2	175.8	140.1	98.2	74.1	61.4	53.3	44.7
30,0°	379.5	393.7	407.6	411.8	416.2	419.4	184.6	142.5	99.5	73.6	57.7	48.7	38.8
32,5°	401.0	403.5	412.2	426.4	435.0	437.9	193.3	147.6	104.0	73.3	52.0	40.1	35.2
35,0°	419.2	422.4	422.5	435.6	445.7	448.7	186.7	143.1	99.2	66.6	45.2	35.4	29.5
37,5°	415.6	427.1	432.3	432.2	436.8	440.0	190.5	143.1	98.0	62.3	42.1	34.5	27.7
40,0°	400.5	406.3	413.2	412.8	409.8	408.8	203.0	153.5	96.5	55.6	37.1	30.1	23.0
42,5°	402.4	406.8	400.1	383.3	377.8	385.5	209.2	149.2	86.1	47.7	31.6	22.6	19.0
45,0°	383.4	377.9	365.8	363.7	358.0	348.1	205.7	134.1	71.5	41.1	30.5	22.9	20.5
47,5°	353.3	337.4	324.0	320.1	311.0	304.5	216.3	128.3	59.8	39.0	26.5	22.6	19.1
50,0°	320.4	304.1	287.9	281.2	270.4	271.6	232.3	136.7	54.2	32.9	22.4	18.1	14.6
52,5°	296.6	272.2	245.6	233.2	223.2	221.0	232.0	130.6	47.1	26.1	16.7	13.2	11.8
55,0°	263.0	239.0	214.4	195.3	190.2	195.0	233.6	129.2	49.6	25.2	16.6	12.9	10.2
57,5°	227.9	202.7	178.8	161.7	157.9	162.8	233.0	141.0	52.2	21.8	12.8	11.9	9.9
60,0°	196.3	165.8	147.0	132.3	126.4	124.4	242.3	145.8	57.7	27.6	18.5	13.7	11.9
62,5°	173.7	133.9	112.3	100.0	91.8	90.8	260.8	149.2	55.4	27.0	17.3	12.9	11.5
65,0°	162.4	123.5	92.0	75.5	67.7	66.1	276.7	153.3	50.7	24.0	20.2	14.9	10.8
67,5°	147.6	109.8	75.5	60.0	56.1	54.1	300.7	161.7	45.3	26.5	24.0	17.0	11.5
70,0°	114.6	67.0	38.1	28.1	28.5	29.3	285.9	151.3	44.0	31.3	26.4	19.3	14.1
72,5°	41.7	14.3	7.3	4.1	3.4	3.6	262.8	140.2	44.5	34.2	29.4	22.5	18.5
75,0°	1.2	0.0	0.0	0.0	0.0	0.0	249.7	130.7	39.3	34.0	27.6	23.6	19.6
77,5°	0.0	0.0	0.0	0.0	0.0	0.0	174.3	91.4	26.0	27.2	24.0	19.1	12.8
80,0°	0.0	0.0	0.0	0.0	0.0	0.0	70.5	37.2	13.0	14.3	12.9	6.6	2.7
82,5°	0.0	0.0	0.0	0.0	0.0	0.0	13.4	6.6	2.7	3.4	2.6	0.6	0.0
85,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1N51F08CE EAN: 4058352557716	LP number 59457_491
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	0.1	0.1
2,5°	72.4	71.5	72.1	69.9	70.0	69.5	69.6	71.1	73.1	74.4	73.9	1.0	1.2
5,0°	69.8	67.0	66.8	66.5	65.8	65.0	63.6	63.8	64.7	65.0	65.3	2.2	3.3
7,5°	66.2	63.1	60.9	59.1	58.9	56.8	55.7	57.1	56.9	56.7	57.3	3.6	6.9
10,0°	63.9	60.2	57.2	55.3	51.9	47.8	47.7	48.7	48.0	49.2	50.9	5.0	11.9
12,5°	59.7	54.4	51.3	50.0	47.1	45.9	45.2	43.9	43.5	43.8	43.9	7.0	18.9
15,0°	52.0	47.6	45.9	43.8	44.1	43.2	40.8	40.7	40.5	39.4	39.3	9.3	28.2
17,5°	51.8	47.6	44.0	40.1	37.4	33.6	32.6	33.4	35.0	36.6	37.5	11.4	39.6
20,0°	52.3	46.9	42.0	35.9	33.2	30.6	29.2	29.0	29.7	31.7	32.1	14.3	53.9
22,5°	46.0	43.7	40.1	31.9	28.8	29.6	28.2	25.0	24.4	26.4	27.1	17.8	71.7
25,0°	43.9	40.8	37.1	29.8	26.1	24.8	22.4	19.8	18.8	19.1	18.9	21.1	92.7
27,5°	38.8	35.1	31.2	27.2	24.5	22.4	20.6	20.3	20.3	19.6	18.8	24.7	117.4
30,0°	32.0	30.1	27.9	24.3	23.8	24.5	21.8	19.2	19.4	21.4	22.9	28.5	145.9
32,5°	30.5	27.8	24.4	20.6	19.6	20.3	20.5	18.6	17.3	19.6	21.7	31.9	177.8
35,0°	25.0	23.6	21.5	18.1	17.1	17.2	15.9	15.8	16.6	16.1	15.4	34.6	212.4
37,5°	22.7	21.4	18.8	15.2	14.2	13.9	13.4	15.5	15.9	13.9	13.1	36.8	249.2
40,0°	18.9	17.9	16.1	14.6	14.4	12.2	12.0	14.1	13.7	12.2	11.9	38.8	288.0
42,5°	16.9	14.0	13.4	13.7	12.5	12.1	11.5	11.0	11.5	9.4	8.3	40.9	328.9
45,0°	16.6	13.6	12.4	13.6	14.8	13.9	10.8	9.7	11.1	8.3	6.2	42.7	371.5
47,5°	13.3	12.7	12.5	11.3	11.8	12.1	10.4	9.1	8.4	6.4	5.4	44.2	415.7
50,0°	11.2	9.0	9.4	9.3	9.3	9.6	8.6	8.0	8.3	6.6	4.5	45.0	460.7
52,5°	10.2	9.2	9.9	9.0	7.5	8.3	7.7	8.5	8.3	6.1	5.8	45.4	506.2
55,0°	9.1	8.7	6.8	5.8	5.7	6.1	6.5	6.7	6.2	5.1	4.7	47.1	553.2
57,5°	9.4	8.1	7.1	6.0	4.8	4.7	4.6	5.0	5.2	4.2	2.8	49.2	602.4
60,0°	10.5	7.0	5.8	5.7	5.0	4.9	3.8	4.1	4.0	3.1	2.7	52.7	655.1
62,5°	10.0	6.9	5.5	5.6	4.5	4.2	3.7	2.7	2.1	2.2	2.4	53.3	708.4
65,0°	10.1	7.2	6.2	5.5	3.3	3.6	3.8	2.5	1.6	1.3	1.3	54.2	762.6
67,5°	8.5	7.8	6.4	4.1	2.3	2.2	2.3	2.1	1.3	1.0	1.1	55.5	818.1
70,0°	9.4	7.8	5.7	3.1	2.3	1.5	1.2	1.4	0.9	0.6	0.8	54.6	872.7
72,5°	13.7	8.3	4.8	2.2	1.1	0.4	0.3	0.5	0.4	0.0	0.0	49.9	922.6
75,0°	13.4	5.5	1.9	0.6	0.1	0.0	0.0	0.0	0.0	0.0	0.0	41.2	963.8
77,5°	6.3	1.3	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	24.9	988.7
80,0°	0.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	9.5	998.3
82,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.7	1000.0
85,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 micro LED	Order number: 5XC1N51F08CE EAN: 4058352557716	LP number 59457_491
Dimming levels table		environmental temperature: 25°C
		sITeco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	1580	12.6	12.9	12.8
95	241	252	1499	12.0	12.3	12.2
90	229	250	1424	11.4	11.7	11.6
85	216	248	1344	10.8	11.0	10.9
80	203	246	1263	10.1	10.4	10.2
75	190	243	1182	9.6	9.8	9.7
70	178	241	1107	9.0	9.2	9.1
65	165	238	1026	8.4	8.6	8.5
60	152	235	946	7.8	8.0	7.9
55	140	232	871	7.3	7.5	7.4
50	127	229	790	6.8	6.9	6.8
45	114	225	709	6.2	6.3	6.2
40	102	221	634	5.7	5.8	5.8
35	89	216	554	5.1	5.2	5.2
30	76	210	473	4.6	4.7	4.6
25	63	203	392	4.1	4.1	4.1
24	62	202	386	4.0	4.1	4.0