


Photometric test report

Family Highbay 21	Order number: 52HN12DB4WLA EAN: 4069025394880	LP number 59723_90
	Version	primary light control with lens, PMMA, housing, white, for Licross® rail, wide distribution
	Lamps	LED 4000 K CRI ≥ 80
	Controlgear	ECG-DALI
	Rated values	Net luminous flux = 64000 lm Power consumption = 345.0 W Luminous efficacy = 185.5 lm/W
		serial documentation 27.02.2025
		

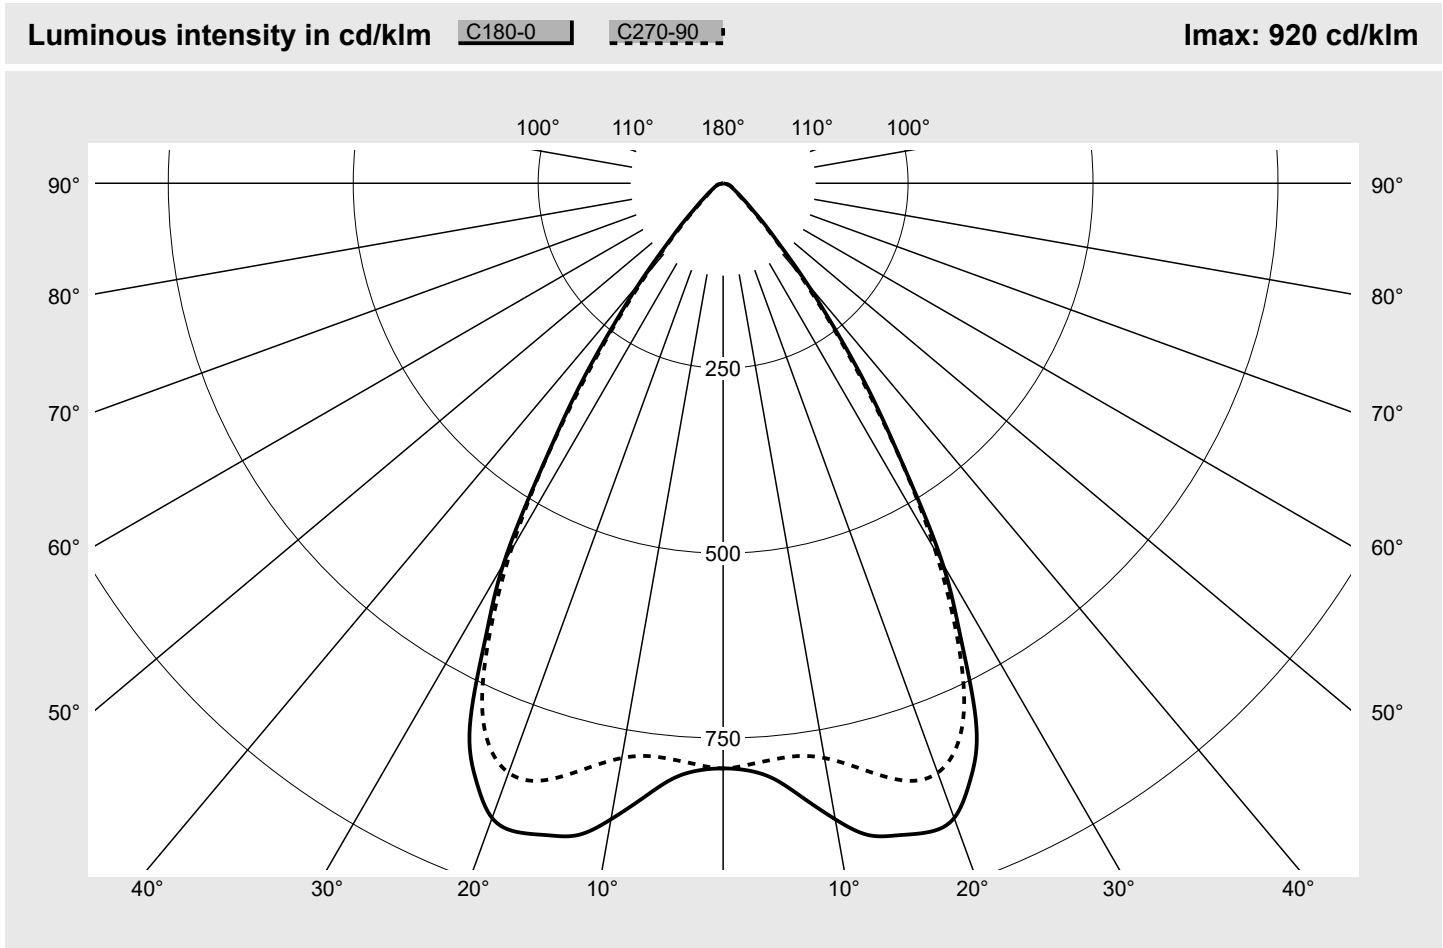

Classifications		Luminaire light output ratios	
DIN 5040	A 7 0	ηLB	100.0%
CIE	N1=90 N2=98 N3=100	ϕ _u	100.0%
	N4=100 N5=100	ϕ _o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Highbay 21	Order number: 52HN12DB4WLA EAN: 4069025394880	LP number 59723_90
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	0,0° 180,0°	7,5° 172,5° 187,5° 352,5°	15,0° 165,0° 195,0° 345,0°	22,5° 157,5° 202,5° 337,5°	30,0° 150,0° 210,0° 330,0°	37,5° 142,5° 217,5° 322,5°	45,0° 135,0° 225,0° 315,0°
γ	Luminous intensity in cd/klm						
0,0°	791.0	791.0	791.0	791.0	791.0	791.0	791.0
2,5°	794.7	794.4	795.0	795.0	794.2	792.8	792.0
5,0°	809.1	811.4	809.6	807.9	804.8	800.8	797.1
7,5°	839.0	837.9	835.9	831.3	824.9	817.3	810.1
10,0°	873.0	873.9	866.7	857.6	846.5	834.6	825.0
12,5°	902.2	899.8	892.6	881.8	868.2	853.9	842.5
15,0°	912.4	911.0	905.2	895.6	883.1	869.5	858.7
17,5°	919.8	918.2	913.1	904.4	892.7	879.7	870.3
20,0°	913.1	910.4	906.8	900.7	891.6	880.0	870.9
22,5°	873.0	875.7	872.3	868.8	863.2	854.7	847.2
25,0°	810.1	803.4	805.6	804.0	800.6	794.9	789.9
27,5°	697.5	704.9	702.5	701.8	699.9	697.0	693.3
30,0°	593.2	587.4	585.8	584.9	582.5	580.2	578.9
32,5°	456.1	464.3	462.1	462.0	458.3	454.5	453.6
35,0°	347.7	343.4	342.9	343.5	340.5	335.4	333.2
37,5°	248.6	249.1	246.7	247.3	245.8	241.7	237.9
40,0°	174.7	169.8	171.0	172.0	172.0	169.5	166.1
42,5°	115.9	118.7	117.3	118.1	118.9	118.2	116.5
45,0°	82.2	79.8	80.4	81.1	81.3	81.6	80.9
47,5°	56.5	57.6	57.2	57.7	57.6	57.9	57.5
50,0°	42.4	41.3	41.7	42.1	42.1	42.1	42.0
52,5°	32.0	31.8	31.7	32.2	32.5	32.7	32.7
55,0°	25.6	24.9	25.0	25.6	26.1	26.6	26.9
57,5°	20.6	20.3	20.3	20.8	21.4	22.1	22.4
60,0°	17.2	16.8	16.6	17.2	18.2	18.6	18.9
62,5°	14.5	14.3	13.9	14.3	15.3	15.8	16.0
65,0°	13.1	12.5	12.0	12.2	13.0	13.5	13.7
67,5°	11.1	10.9	10.3	10.4	11.4	11.4	11.5
70,0°	9.4	9.0	8.7	8.7	9.6	9.3	9.5
72,5°	7.6	7.5	7.3	7.2	7.3	7.4	7.8
75,0°	5.9	5.7	5.6	5.7	5.6	5.7	6.1
77,5°	4.1	4.1	4.1	4.2	4.1	4.2	4.5
80,0°	2.6	2.5	2.5	2.7	2.7	2.8	2.9
82,5°	1.1	1.2	1.2	1.3	1.5	1.5	1.7
85,0°	0.5	0.5	0.5	0.5	0.5	0.5	0.6
87,5°	0.2	0.3	0.3	0.3	0.3	0.3	0.3

Photometric test report

Family Highbay 21	Order number: 52HN12DB4WLA EAN: 4069025394880	LP number 59723_90
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	52,5° 127,5° 232,5° 307,5°	60,0° 120,0° 240,0° 300,0°	67,5° 112,5° 247,5° 292,5°	75,0° 105,0° 255,0° 285,0°	82,5° 97,5° 262,5° 277,5°	90,0° 270,0°	Phi-zone	Total Phi-zone
	Luminous intensity in cd/klm						Luminous flux in lm/klm	
γ								
0,0°	791.0	791.0	791.0	791.0	791.0	791.0	1.2	1.2
2,5°	791.3	790.7	790.0	789.4	788.0	786.7	9.5	10.7
5,0°	794.2	790.9	788.1	786.0	783.2	781.9	19.1	29.7
7,5°	803.7	797.3	791.2	786.8	782.5	780.9	29.0	58.7
10,0°	816.7	808.7	801.4	796.1	791.2	788.9	39.5	98.2
12,5°	833.0	825.3	818.6	813.6	808.7	806.6	50.4	148.6
15,0°	850.7	844.9	836.9	832.9	831.6	829.0	61.4	210.0
17,5°	864.2	859.8	856.6	853.6	849.6	847.0	72.4	282.5
20,0°	864.8	860.1	856.9	853.9	850.4	848.0	82.3	364.7
22,5°	841.4	836.7	833.2	829.7	826.8	824.5	89.2	453.9
25,0°	786.0	782.5	779.1	775.6	772.9	771.0	91.6	545.4
27,5°	691.2	689.6	687.4	684.8	682.7	681.4	87.8	633.3
30,0°	578.6	579.1	578.3	576.4	575.3	574.3	79.6	712.9
32,5°	454.5	456.7	457.0	455.4	454.6	454.3	67.4	780.2
35,0°	335.0	337.7	338.0	336.6	336.0	336.2	53.3	833.5
37,5°	239.3	241.4	241.0	239.6	239.1	239.2	40.5	874.0
40,0°	166.2	166.4	164.7	163.3	162.9	163.0	29.6	903.6
42,5°	115.3	113.5	111.1	110.0	109.8	109.7	21.3	924.9
45,0°	79.0	76.9	75.1	74.3	74.0	73.9	15.2	940.1
47,5°	56.0	54.4	53.1	52.3	51.9	51.7	11.2	951.3
50,0°	40.9	39.8	38.8	38.0	37.5	37.4	8.5	959.8
52,5°	31.8	30.8	29.9	29.1	28.8	28.7	6.8	966.6
55,0°	25.9	25.0	24.2	23.4	23.2	23.3	5.6	972.3
57,5°	21.7	20.8	20.1	19.5	19.4	19.6	4.8	977.0
60,0°	18.6	18.0	17.1	16.6	16.8	17.1	4.2	981.2
62,5°	16.0	15.6	14.7	14.4	14.7	15.1	3.6	984.8
65,0°	14.0	13.6	12.8	12.7	13.1	13.5	3.2	988.1
67,5°	12.0	12.1	11.2	11.1	11.6	12.1	2.9	991.0
70,0°	9.8	10.4	9.7	9.7	10.2	10.6	2.5	993.4
72,5°	7.8	8.3	8.3	8.3	8.8	9.1	2.1	995.5
75,0°	6.2	6.3	6.8	6.9	7.3	7.6	1.6	997.1
77,5°	4.6	4.9	5.3	5.5	5.8	6.0	1.3	998.4
80,0°	3.1	3.4	3.7	4.0	4.2	4.4	0.9	999.2
82,5°	1.8	2.1	2.4	2.6	2.8	2.9	0.5	999.7
85,0°	0.7	1.0	1.2	1.3	1.6	1.6	0.2	1000.0
87,5°	0.3	0.3	0.3	0.3	0.4	0.4	0.1	1000.0

Photometric test report

Family Highbay 21			Order number: 52HN12DB4WLA EAN: 4069025394880							LP number 59723_90	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	21.0	22.2	21.3	22.5	22.9	20.8	22.0	21.2	22.3	22.7
	3H	21.0	22.1	21.4	22.4	22.8	20.9	22.0	21.3	22.3	22.7
	4H	21.0	22.0	21.4	22.4	22.8	20.9	21.9	21.3	22.3	22.7
	6H	21.0	21.9	21.4	22.3	22.7	21.0	21.9	21.4	22.2	22.6
	8H	21.1	21.8	21.5	22.2	22.6	21.1	21.8	21.5	22.2	22.6
	12H	21.1	21.7	21.5	22.1	22.6	21.1	21.8	21.5	22.2	22.6
4H	2H	20.9	21.9	21.3	22.2	22.6	20.7	21.7	21.1	22.1	22.4
	3H	21.0	21.8	21.4	22.2	22.6	20.9	21.7	21.3	22.1	22.5
	4H	21.0	21.7	21.5	22.1	22.6	21.0	21.7	21.4	22.1	22.5
	6H	21.0	21.6	21.5	22.1	22.5	21.0	21.7	21.5	22.1	22.6
	8H	21.0	21.5	21.5	22.0	22.5	21.1	21.6	21.5	22.1	22.6
	12H	21.0	21.4	21.5	21.9	22.4	21.1	21.6	21.6	22.0	22.5
8H	4H	21.0	21.5	21.4	22.0	22.4	20.9	21.5	21.4	21.9	22.4
	6H	21.0	21.4	21.5	21.9	22.4	21.0	21.5	21.5	21.9	22.4
	8H	20.9	21.3	21.4	21.8	22.3	21.0	21.4	21.5	21.9	22.5
	12H	20.9	21.2	21.4	21.7	22.3	21.1	21.4	21.6	21.9	22.4
12H	4H	21.0	21.4	21.5	21.9	22.4	20.9	21.4	21.4	21.8	22.3
	6H	21.0	21.3	21.5	21.8	22.3	21.0	21.4	21.5	21.9	22.4
	8H	20.9	21.2	21.5	21.7	22.3	21.0	21.3	21.6	21.8	22.4

Luminance table		Max. for $\gamma \geq 65^\circ$				Photometric dimensions in mm:		L = 852 B = 264		
C-planes	0,0° 180,0°	10,0° 170,0° 190,0° 350,0°	20,0° 160,0° 200,0° 340,0°	30,0° 150,0° 210,0° 330,0°	40,0° 140,0° 220,0° 320,0°	50,0° 130,0° 230,0° 310,0°	60,0° 120,0° 240,0° 300,0°	70,0° 110,0° 250,0° 290,0°	80,0° 100,0° 260,0° 280,0°	90,0° 270,0°
		Luminance in cd/m²								
γ										
45,0°	33088.5	32064.3	32546.2	32727.1	32794.6	32065.1	30926.0	30079.8	29800.8	29718.8
50,0°	18770.5	18253.3	18595.0	18637.7	18635.1	18281.8	17625.3	17039.6	16667.5	16536.8
55,0°	12708.4	12336.6	12611.0	12933.1	13280.5	13026.0	12381.5	11864.2	11541.0	11580.3
60,0°	9777.2	9495.3	9655.2	10336.6	10661.5	10643.9	10253.5	9625.5	9513.6	9712.9
65,0°	8797.6	8286.2	8108.5	8776.1	9179.6	9441.5	9176.0	8559.7	8717.0	9106.6
70,0°	7852.6	7416.3	7175.6	7948.2	7774.3	8066.0	8630.4	8031.4	8350.0	8850.9
75,0°	6457.6	6233.9	6262.6	6199.3	6389.9	6753.7	6961.2	7580.7	7874.4	8355.1
80,0°	4211.1	4076.4	4337.1	4499.5	4574.5	5000.6	5567.9	6296.9	6767.5	7165.5
85,0°	1645.4	1604.0	1630.9	1638.9	1791.9	2258.8	3183.1	3963.7	4860.4	5298.6

Photometric test report

Family
Highbay 21

Order number: 52HN12DB4WLA
EAN: 4069025394880

LP number
59723_90

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

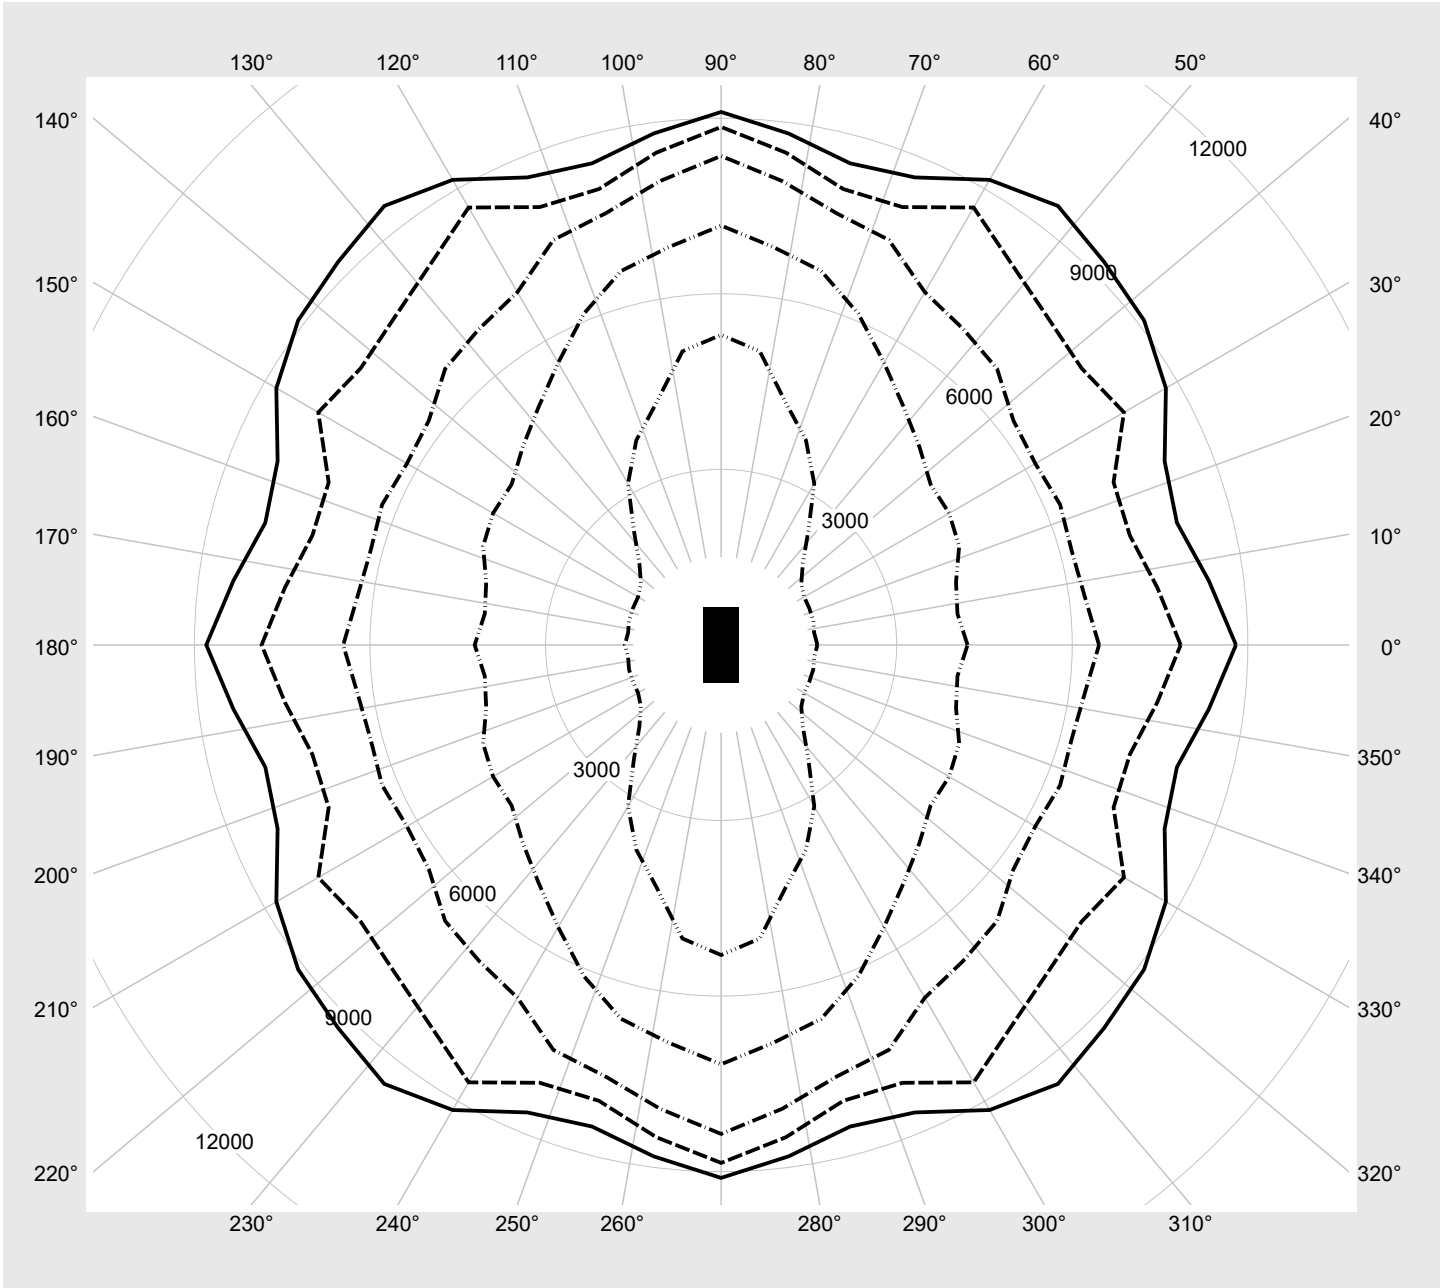

Photometric test report

Family Highbay 21	Order number: 52HN12DB4WLA EAN: 4069025394880	LP number 59723_90
Dimming levels table		environmental temperature: 25°C



Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	64000	345.0
95	240	252	60763	325.5
90	227	250	57700	307.4
85	213	248	54396	288.2
80	200	245	51269	270.3
75	186	243	47881	251.2
70	173	240	44694	233.6
65	160	237	41495	216.0
60	148	234	38492	199.8
55	135	231	35243	182.5
50	122	227	31959	165.1
45	110	223	28906	149.2
40	97	219	25569	132.0
35	85	214	22470	116.1
30	72	208	19091	99.0
25	60	201	15938	83.3
20	48	193	12779	67.9
15	36	182	9584	52.6
10	24	168	6370	37.1
5	12	142	3150	21.0
2	5	110	1262	11.4