


Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7B75N08NA EAN: 4069025098344	LP number 59074_774
	Version	post-top or side-entry mounting, NEMA 7 pin (DALI)
	Optic	asymmetric, wide distribution (ST0.5a G)
	Cover	toughened safety glass
	Lamps	LED 2200 K CRI ≥ 70
	Controlgear	ECG SITECO
	Rated values	Net luminous flux = 18260 lm Power consumption = 149.4 W Luminous efficacy = 122.2 lm/W
		serial documentation 20.03.2025
		

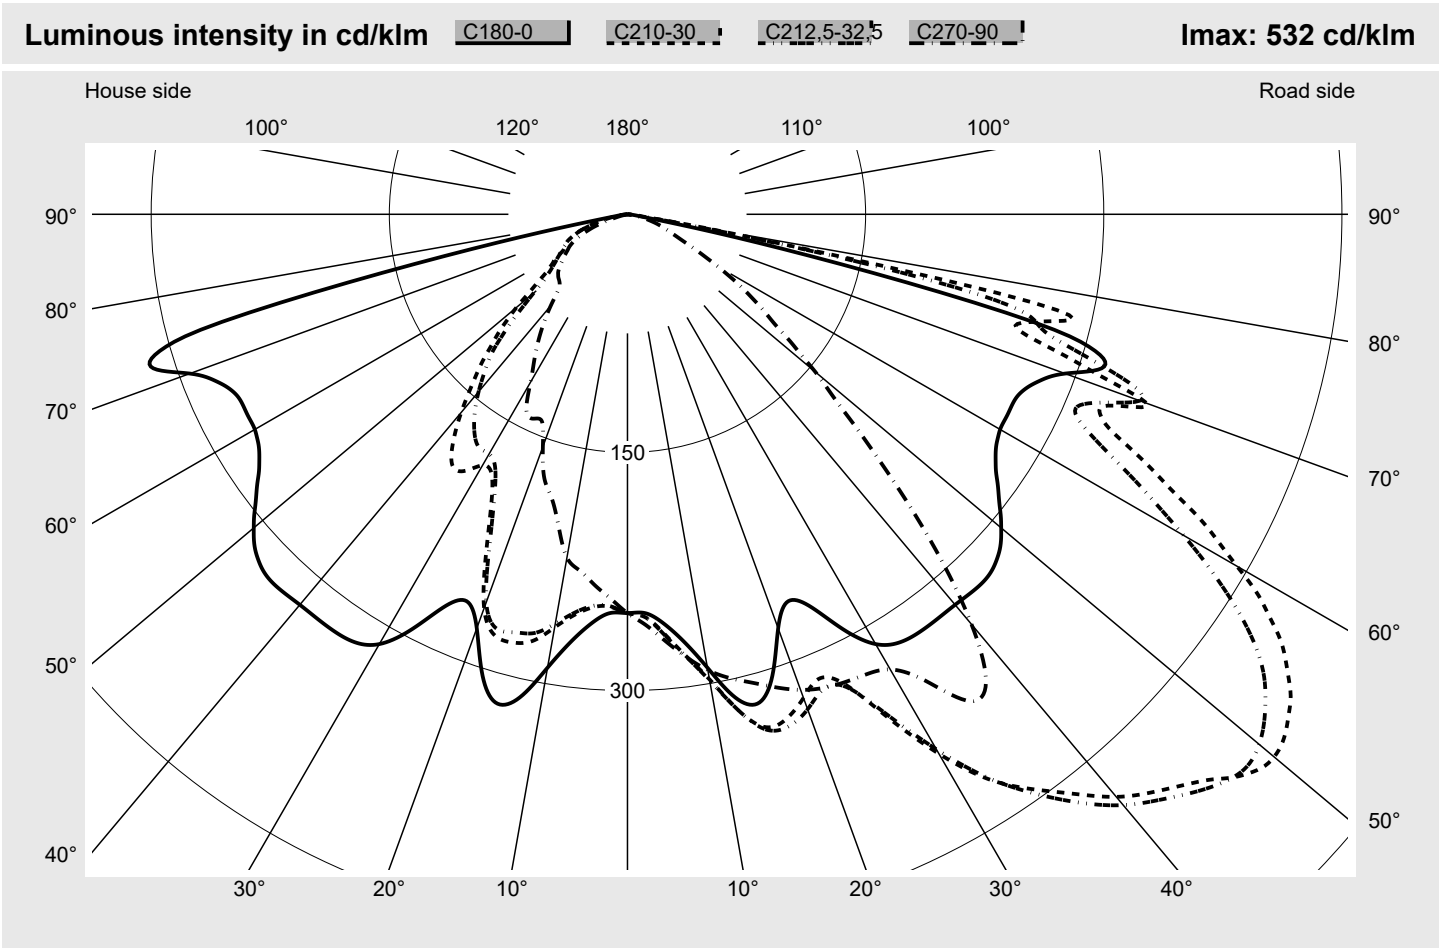


Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2	
Class:	G4
Imax 70°	466.0
Imax 80°	84.5
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions	
DIN EN 13032 and DIN 5032	

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7B75N08NA EAN: 4069025098344	LP number 59074_774
Envelope curve in cd/klm KMK 50° KMK 49° KMK 48° KMK 47°		sit eco

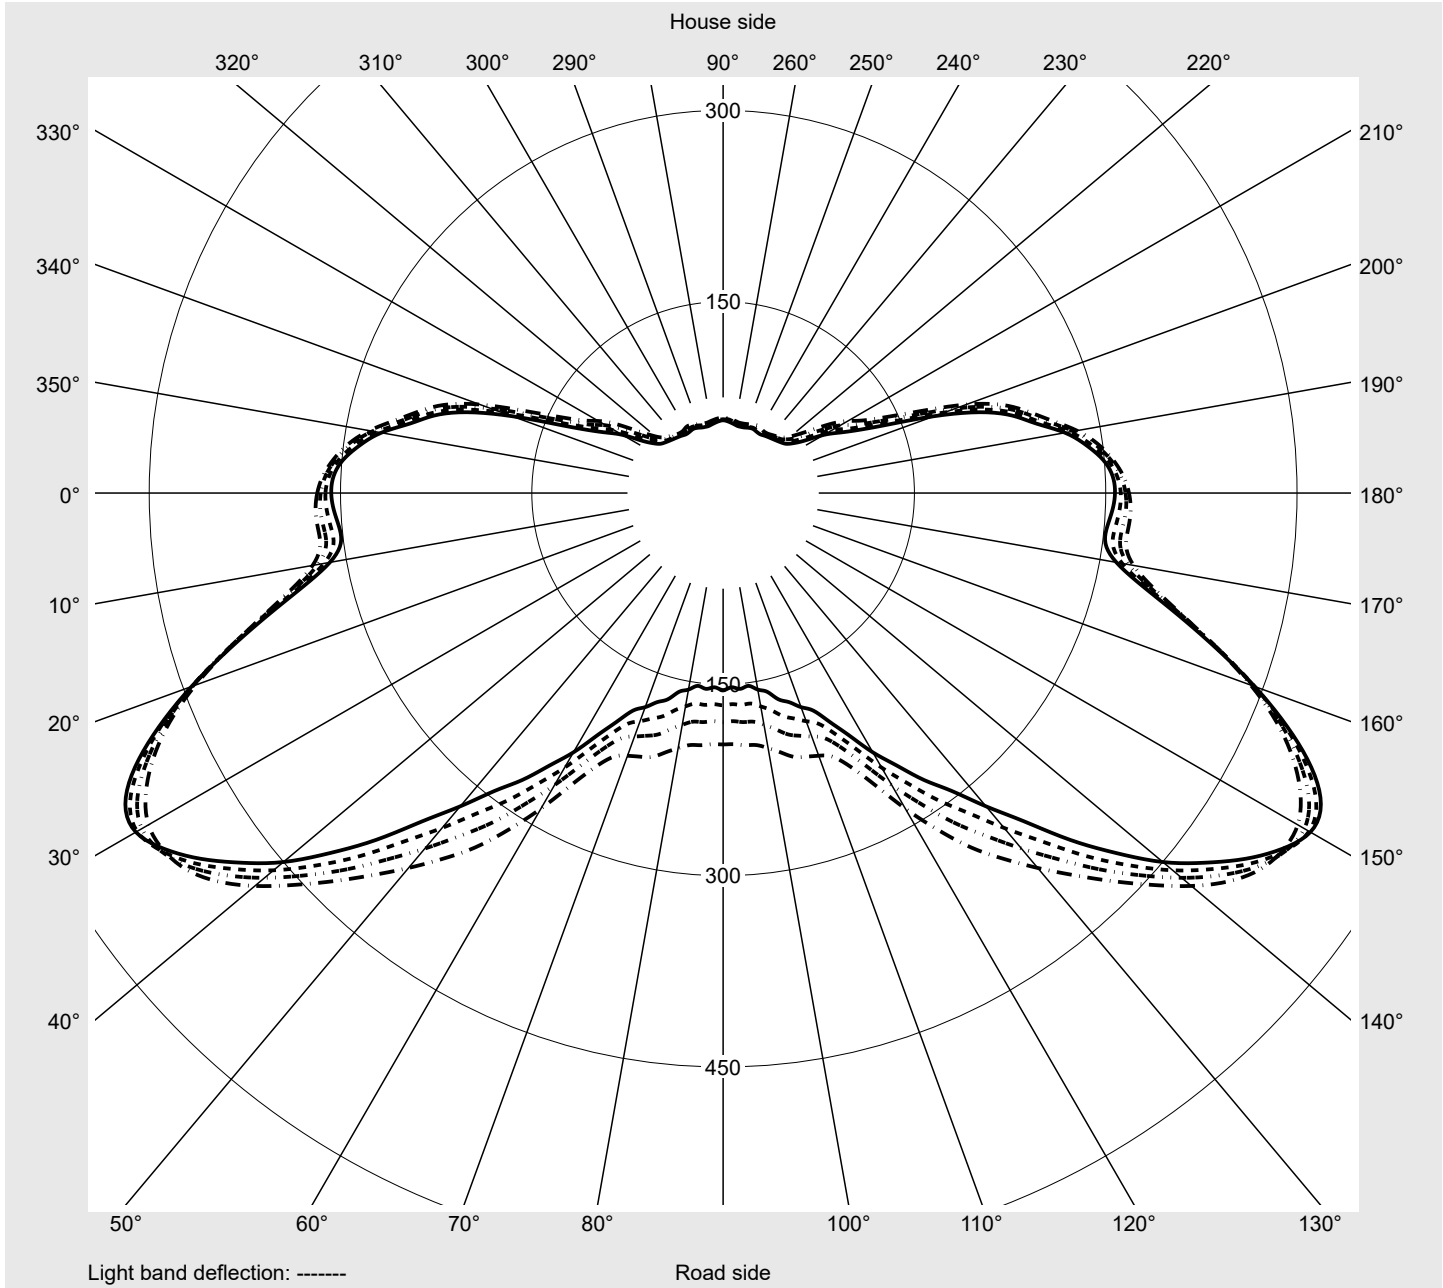

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7B75N08NA EAN: 4069025098344	LP number 59074_774
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2
2,5°	251.4	251.6	251.8	252.0	252.2	252.5	252.7	252.9	253.1	253.4	253.5	253.8	254.0	254.1	254.3
5,0°	258.5	259.1	259.9	260.7	261.4	261.9	262.2	262.4	262.9	263.3	263.8	264.5	265.1	265.8	266.0
7,5°	271.3	272.4	273.6	274.3	275.1	275.2	275.8	276.2	277.2	277.8	278.9	279.5	280.4	280.6	281.2
10,0°	290.0	291.7	292.5	293.3	293.3	293.7	293.8	294.8	295.2	296.2	296.6	297.4	297.4	298.3	298.3
12,5°	311.3	313.3	313.5	314.3	313.7	314.5	314.5	316.0	316.4	317.8	318.0	319.1	319.2	319.3	319.7
15,0°	318.8	319.0	318.7	318.1	317.6	318.1	319.4	321.2	323.3	325.6	328.2	331.2	334.4	335.9	338.6
17,5°	304.0	303.9	303.0	302.2	302.2	303.6	305.8	308.9	312.5	317.0	321.9	327.5	333.1	338.1	342.9
20,0°	277.5	279.5	278.2	279.7	280.3	283.9	286.4	291.6	295.9	303.0	309.1	317.6	324.2	331.8	337.5
22,5°	264.0	267.6	270.2	273.0	276.7	280.1	284.1	288.4	294.0	299.7	305.5	311.0	316.4	323.3	328.1
25,0°	272.6	278.4	284.8	289.0	294.6	297.4	303.0	307.0	314.1	318.1	323.3	324.9	327.7	329.1	329.6
27,5°	295.0	303.0	310.2	315.7	320.4	324.5	330.3	337.3	345.3	352.0	357.0	359.1	358.7	356.0	352.1
30,0°	312.6	321.6	329.3	334.8	339.7	345.3	353.5	363.4	374.5	384.0	390.8	393.4	392.3	389.1	384.2
32,5°	319.6	328.7	336.2	341.5	346.5	353.7	364.6	378.0	392.2	404.9	414.2	419.5	421.4	420.1	417.0
35,0°	321.1	329.9	336.8	341.5	346.4	355.1	368.4	384.8	401.8	417.0	428.5	436.4	441.7	445.0	445.9
37,5°	321.0	329.2	335.1	339.0	344.3	354.7	370.4	388.9	408.1	425.7	439.8	450.7	459.9	467.0	470.9
40,0°	321.1	328.1	332.6	335.4	341.2	353.8	371.8	392.6	413.9	433.7	451.2	466.8	479.0	485.8	489.2
42,5°	322.0	327.4	330.2	331.7	338.2	353.2	373.9	397.4	421.9	445.7	466.4	482.2	493.0	499.6	503.4
45,0°	321.7	325.2	325.9	326.2	333.4	350.6	374.7	402.9	432.6	459.9	481.2	496.2	506.0	512.5	514.5
46,0°	320.4	323.0	322.9	323.1	330.8	348.8	374.6	404.9	436.7	465.0	486.8	502.2	512.4	517.0	515.5
47,0°	318.3	319.8	318.9	318.7	326.8	346.0	374.0	406.7	440.3	469.9	493.1	510.3	520.3	520.6	514.2
48,0°	315.5	316.1	314.3	314.0	322.6	343.2	373.1	407.5	442.4	473.6	498.8	517.8	526.3	522.6	510.9
49,0°	311.8	311.1	308.7	308.2	317.7	339.8	371.5	407.1	443.4	476.8	504.5	524.3	530.6	522.1	506.0
50,0°	307.3	305.5	302.3	302.4	313.1	336.8	369.4	405.8	443.5	478.7	508.9	528.4	531.7	519.4	500.0
51,0°	302.6	299.8	296.4	297.2	309.2	334.1	367.1	403.9	442.8	480.1	511.8	530.6	530.3	515.2	493.5
52,0°	297.4	293.5	290.1	292.2	305.7	331.6	365.0	402.3	442.5	481.8	514.3	530.3	526.6	509.6	486.2
53,0°	292.7	288.2	284.9	288.3	303.2	330.1	363.8	401.8	443.4	483.8	515.5	527.9	521.7	503.1	477.1
54,0°	288.2	283.2	280.2	285.0	301.4	329.2	363.5	402.6	445.7	486.4	515.8	524.7	516.4	495.7	465.9
55,0°	283.4	278.2	275.8	282.2	300.2	329.3	364.6	405.4	449.7	489.9	514.5	518.9	508.3	485.8	451.7
56,0°	279.7	274.5	272.9	280.7	300.1	330.3	366.8	409.4	454.6	493.0	512.5	512.6	499.7	473.3	435.0
57,0°	276.5	271.6	271.0	280.2	300.9	332.6	370.0	415.0	460.3	495.6	510.2	504.8	489.8	458.4	417.8
58,0°	274.0	269.6	269.9	280.6	302.6	335.7	375.0	421.7	467.1	497.5	505.6	496.5	476.1	441.5	399.8
59,0°	272.3	268.4	269.7	281.8	305.1	339.6	380.6	429.2	473.6	498.4	500.6	486.7	462.3	423.6	381.6
60,0°	271.0	267.7	270.0	283.5	308.5	345.4	389.0	439.3	480.2	497.4	492.4	473.1	443.3	404.4	363.7
61,0°	270.6	267.5	270.6	285.5	312.1	351.4	397.6	448.8	485.1	494.7	483.7	459.2	425.6	385.0	346.3
62,0°	270.6	267.6	271.4	287.9	316.3	358.2	407.0	458.0	489.0	491.0	474.6	445.2	408.3	366.8	330.9
63,0°	270.5	267.9	273.2	291.1	321.6	366.4	418.0	467.2	490.5	484.2	462.0	427.4	386.7	348.6	316.4
64,0°	270.4	268.7	275.7	295.6	327.7	374.6	428.6	473.9	489.8	477.0	449.7	410.9	368.6	331.5	304.6
65,0°	271.0	270.8	279.3	302.0	335.3	384.9	439.6	479.8	487.1	467.0	436.2	391.2	350.1	317.6	297.1
66,0°	272.9	273.8	284.7	309.3	344.5	395.6	449.6	482.9	481.7	457.1	420.5	374.1	332.4	308.9	295.5
67,0°	275.8	277.6	290.5	317.8	353.5	405.6	457.2	482.8	475.7	446.4	406.8	361.1	323.7	308.7	303.1
68,0°	280.0	283.6	299.2	329.0	364.2	415.9	463.1	478.8	466.2	433.5	393.9	353.0	322.9	317.1	320.0
69,0°	285.2	290.3	309.4	341.5	376.0	425.6	465.8	471.9	453.2	418.4	384.3	356.2	337.9	331.0	338.2
70,0°	293.3	300.8	322.8	358.3	390.0	435.5	466.0	461.7	438.8	394.0	359.3	335.9	348.2	343.3	350.0
71,0°	304.7	313.5	340.2	376.2	407.0	443.9	462.4	451.1	422.5	374.2	327.5	302.7	319.0	340.6	352.8
72,0°	314.0	325.0	356.5	392.8	420.5	448.6	456.5	440.5	406.8	354.4	302.6	275.3	291.8	320.9	339.0

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7B75N08NA EAN: 4069025098344	LP number 59074_774
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2
2,5°	254.5	255.2	255.3	255.7	256.0	256.3	256.5	256.6	256.8	257.1	257.2	257.4	257.6	257.9	258.1
5,0°	266.8	266.8	267.7	267.7	268.1	268.3	268.3	269.0	268.7	269.2	269.1	269.1	269.6	269.3	269.8
7,5°	281.5	281.9	282.2	282.3	282.5	282.3	282.6	282.4	282.6	282.3	282.3	282.2	282.1	282.1	281.8
10,0°	299.0	299.0	299.4	299.2	299.3	299.1	298.9	298.6	297.9	297.4	296.6	296.2	295.4	295.0	294.2
12,5°	320.1	320.4	320.2	320.1	319.1	318.7	316.9	316.2	313.9	313.0	310.8	309.6	307.6	306.3	304.8
15,0°	340.5	342.3	342.5	342.7	341.0	339.6	336.2	333.6	329.9	327.1	324.0	321.5	318.9	316.6	314.3
17,5°	347.6	351.7	355.2	357.7	358.7	358.2	355.7	352.1	347.1	341.9	336.9	332.7	329.1	326.0	323.3
20,0°	344.0	349.0	354.3	358.3	362.0	364.4	365.8	365.4	362.8	358.1	352.0	345.7	340.3	336.0	332.6
22,5°	333.1	337.7	342.8	347.5	352.4	356.8	361.0	364.1	366.0	365.5	362.5	356.9	350.4	344.3	339.5
25,0°	329.4	330.1	331.6	334.3	338.1	342.8	348.1	353.2	358.0	362.0	364.1	363.2	359.0	352.4	345.9
27,5°	347.1	342.4	337.9	334.9	333.7	335.2	339.0	344.3	350.0	355.4	359.9	362.5	362.1	357.5	350.6
30,0°	377.6	370.2	362.4	355.6	350.3	346.8	345.3	346.0	348.8	352.7	356.7	360.3	362.3	360.7	355.3
32,5°	412.1	406.0	399.9	393.2	385.5	376.4	368.0	361.2	357.4	356.7	358.4	361.6	365.2	367.2	365.5
35,0°	445.2	443.0	439.0	431.9	422.2	410.4	397.9	385.7	375.9	369.9	368.9	371.8	377.7	383.7	387.2
37,5°	472.4	471.4	467.7	461.4	453.1	442.5	429.5	414.4	399.0	386.7	380.4	380.7	385.1	390.8	393.5
40,0°	490.9	490.6	487.8	482.0	472.7	459.3	442.4	423.2	402.3	384.3	371.8	367.6	367.3	369.0	367.2
42,5°	504.6	501.5	492.9	479.9	462.7	443.9	422.9	403.6	384.1	366.5	349.1	336.5	326.0	321.7	315.5
45,0°	509.3	495.9	476.2	454.4	432.2	412.0	393.9	376.2	354.9	330.8	303.3	280.0	264.2	258.0	254.7
46,0°	506.0	488.6	465.7	442.2	419.6	399.4	380.0	359.9	335.5	308.8	279.8	256.5	242.0	236.8	234.7
47,0°	500.0	479.3	454.7	430.1	406.2	383.7	361.6	339.3	312.9	285.7	258.2	237.0	223.7	219.2	216.7
48,0°	492.2	469.3	443.6	417.2	389.6	363.9	338.8	315.4	289.2	264.4	240.1	220.7	208.0	203.1	199.5
49,0°	484.2	460.2	432.1	402.5	370.7	342.8	316.4	294.0	270.2	248.6	226.6	208.7	195.9	190.4	185.4
50,0°	476.1	450.1	417.7	384.5	349.1	320.7	294.4	274.7	253.3	234.8	214.4	198.1	184.6	178.7	171.9
51,0°	467.8	437.8	401.4	364.5	328.5	299.9	276.0	257.4	239.3	222.4	204.3	188.2	175.0	167.5	160.2
52,0°	457.4	423.0	383.1	344.8	309.6	282.2	260.0	243.2	227.2	212.1	195.3	179.8	166.7	158.1	149.7
53,0°	443.8	405.3	363.8	325.7	291.9	265.9	245.7	230.6	216.0	202.5	187.0	172.3	159.0	149.4	140.7
54,0°	428.1	387.1	345.8	309.3	277.5	253.4	234.8	220.4	207.1	195.0	180.9	166.7	153.5	143.0	133.9
55,0°	410.0	368.3	328.4	294.2	265.3	243.1	225.4	211.9	199.8	188.7	175.6	161.9	148.8	138.0	128.2
56,0°	391.1	349.9	312.1	281.0	255.2	234.3	217.6	204.9	193.5	182.9	170.4	157.5	145.2	134.1	122.3
57,0°	373.4	333.9	298.4	271.2	247.6	228.4	212.3	199.8	188.0	177.6	165.5	153.2	138.6	125.2	112.7
58,0°	356.4	319.3	287.3	263.4	241.9	224.0	207.9	195.1	182.2	171.2	157.6	144.2	126.7	114.4	101.8
59,0°	340.7	306.5	278.8	257.3	238.1	220.4	204.2	190.2	175.6	161.9	146.1	131.3	116.0	104.2	93.4
60,0°	325.9	296.1	272.2	253.2	235.7	217.9	200.6	184.6	166.5	150.4	134.5	120.6	106.1	94.9	84.6
61,0°	312.5	287.5	267.4	250.8	234.2	215.9	196.6	177.2	155.5	138.2	122.5	108.9	95.1	84.8	75.4
62,0°	302.1	281.5	265.0	250.0	233.6	214.3	191.9	168.6	144.8	126.9	111.2	98.0	84.9	75.4	67.0
63,0°	293.6	277.8	264.6	250.2	233.1	211.9	185.6	158.6	133.4	115.1	99.6	86.9	74.9	66.3	59.0
64,0°	287.9	276.4	265.7	251.2	232.0	207.6	177.0	147.1	120.7	102.2	86.8	75.0	64.4	57.1	51.1
65,0°	286.2	278.1	268.2	252.3	229.3	200.7	166.8	135.7	108.3	90.0	74.9	64.5	55.2	49.5	44.7
66,0°	290.2	283.6	272.4	252.8	224.6	191.8	155.1	123.5	95.1	77.8	63.3	54.9	46.9	43.1	38.8
67,0°	303.0	294.6	277.9	251.9	218.0	181.4	143.6	110.6	82.9	66.0	54.1	46.7	40.6	37.4	34.6
68,0°	323.3	310.3	284.7	249.4	208.9	169.9	131.3	98.3	71.0	56.0	46.4	40.5	35.8	33.6	31.4
69,0°	341.6	325.4	290.9	245.8	198.9	157.2	118.2	85.5	59.7	47.2	40.0	35.7	32.1	30.5	28.7
70,0°	351.0	334.0	294.4	242.7	190.7	145.5	105.0	74.1	51.0	40.4	35.4	32.6	29.9	28.5	27.0
71,0°	353.1	334.3	293.7	239.1	183.2	133.0	91.3	63.9	43.1	35.1	31.9	30.2	28.2	27.2	25.7
72,0°	340.8	321.4	280.1	228.4	172.1	118.6	79.0	54.3	37.2	30.9	29.1	27.8	26.6	25.8	24.2

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7B75N08NA EAN: 4069025098344	LP number 59074_774
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2
2,5°	258.3	258.5	258.7	258.7	258.8	258.8	258.8	251.1	250.9	250.6	250.3	250.0	249.7	249.4	248.9
5,0°	269.8	269.6	270.1	269.6	269.8	270.0	269.5	258.0	257.4	256.9	256.1	255.3	254.3	253.5	252.5
7,5°	281.9	281.5	281.5	281.3	281.2	281.3	281.0	270.1	269.2	268.1	267.0	265.5	264.1	262.5	261.0
10,0°	293.6	292.9	292.4	292.1	291.8	291.7	291.5	288.5	286.7	285.2	283.2	281.4	278.9	276.7	274.1
12,5°	303.5	302.3	301.1	300.5	299.8	299.7	299.3	310.0	307.5	305.8	303.1	300.8	297.4	294.4	290.7
15,0°	312.2	310.3	308.6	307.3	306.3	305.8	305.5	318.1	317.0	315.8	314.3	312.5	309.9	306.7	302.7
17,5°	320.8	318.7	316.6	314.9	313.6	312.9	312.5	303.9	303.5	303.6	303.7	303.7	302.7	301.1	298.0
20,0°	329.5	326.9	324.3	322.1	320.3	319.2	318.7	277.4	274.6	275.3	273.9	276.0	274.8	276.0	271.7
22,5°	335.5	332.4	329.5	327.1	324.9	323.4	322.8	259.3	253.9	250.2	247.3	246.9	246.2	244.7	241.5
25,0°	340.5	336.3	332.8	329.9	327.4	325.7	325.0	263.5	254.7	246.2	239.8	235.5	230.5	225.4	223.6
27,5°	343.8	338.2	333.8	330.7	328.5	327.0	326.5	284.7	273.6	263.2	254.7	247.3	238.2	232.0	227.2
30,0°	348.2	341.9	337.0	334.0	332.2	331.4	331.0	301.9	290.7	280.5	272.3	262.9	254.7	248.5	238.0
32,5°	360.2	355.8	351.6	349.9	348.4	348.6	347.9	309.7	300.0	291.5	283.5	274.8	268.8	260.6	246.0
35,0°	385.1	381.9	377.7	375.5	374.1	374.5	374.1	312.0	303.8	297.0	288.8	281.7	275.4	263.4	249.1
37,5°	390.5	383.7	377.4	372.6	370.8	370.4	370.9	312.5	305.2	298.7	290.6	283.5	273.8	259.9	247.4
40,0°	362.2	352.4	345.4	339.0	337.3	335.9	337.1	313.2	306.3	298.9	290.6	281.8	268.4	254.3	243.0
42,5°	311.2	301.1	295.9	289.7	289.1	286.7	288.6	315.1	308.1	299.4	289.1	277.2	261.4	248.0	235.0
45,0°	252.5	246.7	242.1	237.9	236.9	235.4	235.5	316.0	308.4	298.9	285.9	270.6	254.2	239.7	220.5
46,0°	232.6	227.0	222.0	217.8	216.9	215.4	215.4	315.3	307.7	297.9	284.1	267.2	250.8	235.2	212.3
47,0°	214.1	208.2	203.1	199.3	198.5	197.1	197.1	313.9	306.4	296.1	281.7	263.4	247.1	229.7	202.8
48,0°	195.9	189.6	184.6	180.8	180.3	179.0	179.6	312.0	304.7	293.9	279.1	259.8	243.5	224.0	193.7
49,0°	181.0	174.4	169.8	166.5	166.7	165.7	166.4	309.1	302.3	291.0	276.0	255.8	239.3	217.5	184.7
50,0°	167.4	159.6	156.5	152.5	154.1	152.4	154.5	305.7	299.1	287.3	272.2	251.6	234.7	210.7	176.2
51,0°	153.5	146.0	142.0	139.4	140.5	140.4	140.9	301.9	295.3	283.0	268.0	247.0	229.5	203.9	168.4
52,0°	141.1	133.1	130.1	128.6	130.1	129.9	130.2	297.6	291.0	277.8	262.7	241.6	223.6	196.8	161.0
53,0°	130.9	122.6	119.8	118.1	119.2	118.6	118.5	293.3	286.5	272.0	255.9	235.2	217.1	190.0	154.2
54,0°	123.7	115.2	111.8	110.1	110.8	110.1	110.2	289.1	281.9	266.2	248.3	227.2	208.9	182.0	147.2
55,0°	118.0	109.8	105.9	103.8	104.2	103.2	103.2	284.5	277.0	260.5	241.3	219.3	199.2	172.0	139.0
56,0°	110.9	102.4	98.4	96.7	96.8	95.7	95.4	280.7	272.7	255.6	235.4	213.0	191.1	161.6	128.9
57,0°	102.6	95.2	91.9	90.2	90.1	88.6	88.5	277.2	268.6	250.5	229.7	206.7	183.9	152.1	118.2
58,0°	94.4	87.5	85.0	82.7	83.0	80.3	81.0	274.4	265.0	246.0	224.3	200.7	176.7	144.3	109.6
59,0°	86.1	79.9	77.1	75.6	75.1	72.8	73.0	272.3	261.9	241.7	219.4	195.0	169.8	136.9	102.7
60,0°	78.0	72.0	69.8	68.6	68.0	65.4	65.6	270.6	259.0	237.5	214.4	189.3	162.7	129.3	96.0
61,0°	69.3	63.9	62.0	61.1	60.2	57.8	58.0	269.8	257.2	234.3	210.2	184.0	156.4	122.6	89.9
62,0°	61.6	56.8	55.4	54.7	53.6	51.4	51.7	269.3	255.6	231.4	205.7	178.1	149.7	115.9	84.1
63,0°	54.4	50.5	49.5	48.9	47.5	45.9	45.9	268.5	253.0	227.3	198.8	168.6	139.9	107.9	78.4
64,0°	47.4	44.3	43.7	43.0	41.7	40.3	40.4	267.9	249.9	221.4	188.2	152.7	123.7	95.7	72.6
65,0°	41.9	39.5	39.2	38.4	37.5	36.1	36.2	268.2	247.1	214.7	175.8	132.6	102.0	78.9	64.7
66,0°	37.2	35.1	35.5	34.5	34.0	32.5	33.0	269.3	245.8	209.9	164.1	114.6	81.9	65.2	55.6
67,0°	33.3	32.3	32.4	31.8	30.8	29.9	30.0	271.6	246.3	206.5	154.8	100.7	68.8	55.9	48.4
68,0°	30.5	29.9	30.1	29.3	28.5	27.8	27.9	275.4	248.4	203.4	145.5	89.3	61.2	50.5	43.3
69,0°	28.2	27.7	27.6	26.7	26.1	25.6	25.7	281.3	252.5	201.3	137.0	80.0	57.0	47.2	40.0
70,0°	26.4	25.7	25.2	24.4	23.9	23.6	23.8	290.6	259.0	199.5	127.7	71.5	53.8	44.0	37.1
71,0°	24.8	23.6	23.0	22.1	21.8	21.3	21.7	302.4	269.3	198.6	117.5	65.4	51.1	41.1	34.1
72,0°	23.1	21.9	21.0	20.1	19.6	19.3	19.7	312.8	278.4	195.4	107.3	62.3	49.3	38.5	31.3

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7B75N08NA EAN: 4069025098344	LP number 59074_774
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2
2,5°	248.5	248.2	247.7	247.4	247.1	246.6	246.4	246.0	245.7	245.4	245.0	244.8	244.4	244.0	243.8
5,0°	251.7	250.7	249.4	248.5	247.6	246.7	245.8	245.0	244.1	243.3	242.5	241.7	240.8	240.1	239.3
7,5°	259.4	257.8	255.9	254.4	253.0	251.4	249.9	248.4	246.9	245.4	244.0	242.7	241.2	239.8	238.3
10,0°	272.0	269.3	267.0	264.2	261.8	259.2	256.8	254.2	251.0	247.7	244.3	241.3	238.7	236.2	234.2
12,5°	287.1	283.0	278.9	275.2	270.1	264.7	259.6	255.2	251.4	248.2	245.3	242.3	239.3	235.6	232.1
15,0°	298.1	292.7	286.2	279.2	272.6	267.4	262.6	258.4	253.5	247.2	240.8	233.4	227.0	220.2	214.8
17,5°	293.5	287.2	281.6	278.1	273.7	268.4	260.8	251.8	242.2	232.8	224.7	217.7	212.0	206.8	202.2
20,0°	269.2	265.6	265.8	264.0	260.1	252.8	245.2	237.0	229.9	222.7	216.0	210.0	205.0	200.1	195.3
22,5°	241.7	241.5	239.4	233.2	227.5	222.8	219.9	218.0	216.8	215.4	212.1	206.4	199.4	191.8	184.4
25,0°	223.2	218.5	211.6	203.3	198.8	195.8	195.4	196.9	198.4	198.3	196.6	193.2	187.7	180.6	173.1
27,5°	218.3	205.8	194.7	185.1	180.4	178.4	176.8	174.2	171.6	170.3	170.7	172.4	174.2	174.9	173.6
30,0°	222.5	207.0	193.8	182.6	174.2	164.6	155.1	147.8	144.0	144.6	149.1	156.6	165.0	171.4	173.4
32,5°	230.4	216.3	203.8	191.8	174.0	153.9	137.0	126.3	123.6	127.5	134.9	143.0	149.6	155.6	159.2
35,0°	236.2	224.9	211.8	192.5	168.0	146.3	129.8	118.7	112.9	112.0	115.0	120.7	126.5	130.5	132.9
37,5°	236.8	224.4	204.4	180.2	158.1	141.0	127.9	116.9	106.9	98.7	94.7	95.3	98.8	104.0	109.2
40,0°	231.1	211.2	184.8	162.9	145.9	134.1	122.9	109.8	96.3	86.5	79.0	75.7	76.6	82.7	88.8
42,5°	215.3	187.2	161.8	144.2	132.4	122.2	109.1	95.8	84.2	75.0	68.5	65.6	65.5	68.3	72.9
45,0°	190.7	161.2	139.6	127.0	117.5	104.6	91.1	80.0	71.4	66.1	63.2	61.5	60.6	60.8	62.5
46,0°	179.4	150.8	131.3	119.4	109.1	95.3	83.1	73.6	67.2	63.9	61.8	60.4	59.3	59.1	59.9
47,0°	168.1	140.9	123.2	113.0	101.5	87.5	76.6	69.0	64.5	62.3	60.7	59.5	58.4	57.9	58.1
48,0°	157.9	132.2	115.8	106.2	92.5	80.2	70.6	65.5	62.4	60.9	59.5	58.5	57.6	57.0	56.7
49,0°	148.6	124.2	108.9	98.4	84.2	73.3	66.3	62.8	60.9	59.6	58.5	57.5	56.7	56.1	55.5
50,0°	140.6	117.0	102.6	91.3	77.2	68.4	63.4	61.0	59.6	58.4	57.5	56.7	56.0	55.2	54.5
51,0°	133.3	110.2	96.0	82.8	70.5	64.3	60.9	59.3	58.0	57.1	56.3	55.7	54.9	54.2	53.5
52,0°	126.2	103.5	89.3	75.8	65.9	61.4	59.1	57.7	56.7	55.9	55.3	54.8	54.0	53.3	52.6
53,0°	119.8	97.1	82.9	70.2	62.7	59.4	57.5	56.4	55.5	54.8	54.2	53.6	53.0	52.5	51.8
54,0°	113.2	90.5	76.3	64.7	59.8	57.2	55.7	54.8	54.1	53.5	53.0	52.3	51.9	51.5	50.9
55,0°	106.1	84.2	70.2	61.1	57.6	55.5	54.3	53.4	52.7	52.2	51.7	51.2	50.9	50.6	50.1
56,0°	97.9	78.3	65.0	58.3	55.4	53.9	52.6	52.2	51.4	51.0	50.4	50.2	49.9	49.7	49.2
57,0°	87.7	71.8	60.7	55.9	53.6	52.1	51.1	50.6	50.0	49.6	49.2	49.0	48.8	48.8	48.4
58,0°	78.4	64.1	56.6	54.4	52.0	50.7	49.7	49.1	48.6	48.5	48.0	47.9	47.7	47.8	47.5
59,0°	71.7	57.4	51.9	51.6	50.3	49.2	48.2	47.4	46.9	47.0	47.0	46.7	46.6	46.8	46.7
60,0°	66.6	53.1	48.1	48.0	48.7	47.8	46.9	46.1	45.5	45.6	45.7	45.7	45.6	45.8	45.7
61,0°	62.6	50.4	45.9	46.0	47.4	46.7	45.7	44.9	44.3	44.4	44.5	44.7	44.5	44.8	44.7
62,0°	59.1	47.9	44.4	45.1	46.0	45.3	44.3	43.7	43.1	43.0	43.1	43.3	43.3	43.7	43.5
63,0°	55.9	45.7	43.1	44.4	44.7	44.0	43.2	42.6	42.0	41.9	42.0	42.2	42.3	42.5	42.5
64,0°	53.1	43.8	41.7	43.6	43.2	42.7	41.9	41.5	40.9	40.8	40.8	41.1	41.2	41.3	41.2
65,0°	49.9	42.0	40.4	42.3	41.9	41.3	40.7	40.5	40.0	39.8	39.7	40.2	40.3	40.0	40.1
66,0°	46.0	40.1	39.2	41.2	40.5	40.1	39.6	39.3	38.6	38.4	38.5	38.9	39.0	38.9	38.9
67,0°	41.6	38.0	37.9	39.4	38.8	38.4	38.0	37.9	37.3	37.0	36.9	37.4	37.5	37.4	37.3
68,0°	37.9	35.8	36.5	37.5	37.0	36.8	36.6	36.5	36.0	35.6	35.5	36.1	36.4	36.1	35.8
69,0°	35.2	33.6	34.8	35.6	35.1	35.1	34.8	35.0	34.6	34.1	33.8	34.7	34.9	34.1	33.8
70,0°	32.7	31.4	32.6	33.3	33.2	33.0	32.9	33.1	32.8	32.3	32.0	32.9	32.6	31.7	31.9
71,0°	29.9	29.1	30.1	30.9	30.9	31.0	30.9	31.0	30.7	30.4	30.3	30.9	29.9	29.4	29.6
72,0°	27.3	26.7	27.3	28.0	27.9	28.1	27.9	28.0	28.0	28.0	27.9	28.2	27.0	26.8	26.9

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7B75N08NA EAN: 4069025098344	LP number 59074_774
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	251.2	0.4	0.4
2,5°	243.4	243.3	243.0	242.8	242.8	242.5	242.5	242.4	242.1	242.4	242.1	242.1	242.3	3.0	3.4
5,0°	238.6	237.9	237.3	236.7	236.3	235.9	235.5	235.4	235.1	234.9	234.7	234.6	234.6	6.1	9.5
7,5°	236.8	235.3	233.8	232.5	231.2	230.3	229.3	228.5	227.9	227.3	227.0	226.7	226.7	9.4	18.9
10,0°	232.2	230.4	228.8	227.3	225.9	224.6	223.4	222.3	221.4	220.6	220.2	219.6	219.6	13.0	31.9
12,5°	227.8	224.2	220.1	216.8	213.4	210.6	208.1	205.7	204.1	202.3	201.7	200.6	200.8	16.8	48.6
15,0°	209.6	205.5	201.8	198.6	195.9	193.5	191.4	189.4	187.8	186.4	185.6	184.8	184.8	20.3	68.9
17,5°	198.1	194.4	191.2	188.2	185.6	183.4	181.3	179.2	177.5	175.9	175.0	174.2	174.2	23.4	92.3
20,0°	190.5	185.8	181.2	176.6	172.6	168.7	165.7	162.6	160.3	157.9	156.9	155.5	155.8	25.7	118.0
22,5°	177.4	170.9	165.2	160.0	155.7	151.9	149.1	146.6	144.7	142.8	141.8	141.0	141.0	27.6	145.6
25,0°	166.7	161.7	158.0	155.0	152.6	150.4	148.5	146.8	145.3	144.0	142.8	142.1	142.0	30.1	175.8
27,5°	170.6	166.5	162.1	157.8	153.9	150.5	147.4	144.7	142.6	140.7	139.1	138.1	137.9	33.4	209.2
30,0°	171.2	166.2	160.0	153.7	148.2	142.8	137.9	132.9	129.2	125.8	123.8	122.1	122.1	37.0	246.2
32,5°	159.3	154.0	146.2	137.1	130.5	124.6	120.6	116.8	114.3	111.8	110.6	109.2	109.4	40.6	286.8
35,0°	134.1	133.4	129.8	123.6	117.5	112.4	108.5	105.3	102.6	100.6	99.2	98.3	98.2	44.2	330.9
37,5°	113.3	115.3	114.5	110.5	105.4	100.4	96.7	93.4	91.0	89.0	87.8	86.8	86.8	47.1	378.0
40,0°	94.4	96.6	97.6	94.4	90.9	85.9	83.0	79.7	78.3	76.2	75.9	74.7	75.2	48.5	426.5
42,5°	77.4	79.8	79.8	77.7	74.6	71.2	68.7	66.9	65.9	65.0	64.6	64.4	64.5	48.6	475.1
45,0°	65.0	66.5	66.1	64.0	61.6	59.9	59.1	58.9	59.3	59.6	60.0	60.3	60.5	33.2	508.4
46,0°	61.4	62.3	61.8	60.0	58.7	58.0	57.7	57.7	58.2	58.7	59.2	59.6	59.8	18.9	527.3
47,0°	59.0	59.5	58.9	58.1	57.5	56.9	56.6	56.6	57.2	57.8	58.5	59.0	59.3	18.7	546.0
48,0°	57.2	57.3	57.3	56.9	56.4	55.7	55.6	55.6	56.3	56.9	57.7	58.2	58.7	18.5	564.5
49,0°	55.7	56.0	56.3	55.9	55.3	54.8	54.7	54.7	55.3	56.0	56.9	57.5	57.9	18.2	582.7
50,0°	54.5	55.0	55.5	55.2	54.6	53.9	53.7	53.7	54.4	55.1	55.9	56.6	57.0	18.0	600.7
51,0°	53.4	53.8	54.5	54.5	53.9	53.0	52.7	52.7	53.2	54.0	54.8	55.5	55.8	17.7	618.4
52,0°	52.5	52.7	53.3	53.8	53.3	52.4	51.8	51.6	52.0	52.7	53.4	54.1	54.4	17.5	635.9
53,0°	51.5	51.7	52.1	52.5	52.6	51.7	50.9	50.5	50.7	51.2	52.0	52.6	52.9	17.2	653.1
54,0°	50.5	50.5	51.0	51.0	51.1	50.8	50.1	49.5	49.4	49.8	50.5	51.0	51.3	17.0	670.1
55,0°	49.6	49.5	50.0	50.0	49.9	49.6	49.4	48.9	48.3	48.4	49.1	49.6	49.9	16.8	686.8
56,0°	48.8	48.5	48.9	48.9	48.6	48.1	48.3	47.8	47.3	47.0	47.8	48.1	48.5	16.5	703.4
57,0°	47.9	47.6	47.7	47.8	47.5	46.9	46.6	46.5	46.0	45.6	46.5	46.9	46.9	16.3	719.7
58,0°	47.0	46.5	46.5	46.6	46.6	45.9	45.3	44.9	44.5	44.3	45.2	45.7	45.5	16.1	735.8
59,0°	46.1	45.2	45.2	45.4	45.5	44.8	44.1	43.5	43.0	42.9	44.1	44.7	44.0	15.9	751.7
60,0°	45.1	44.1	44.1	44.2	44.3	43.8	43.2	42.4	41.8	42.0	43.7	43.9	42.9	15.6	767.3
61,0°	44.1	43.2	42.8	43.2	43.1	42.8	42.2	41.3	40.6	40.7	42.0	42.3	41.7	15.4	782.7
62,0°	43.0	42.2	41.7	41.8	42.0	41.5	41.1	40.3	39.3	39.0	39.9	40.2	40.1	15.2	797.9
63,0°	42.1	41.3	40.8	40.6	40.8	40.2	39.8	39.1	38.0	37.5	38.0	38.3	38.4	15.0	812.9
64,0°	41.1	40.4	39.9	39.5	39.6	38.7	38.3	37.4	36.7	35.6	36.2	36.2	36.7	14.7	827.5
65,0°	40.2	39.9	39.3	38.8	38.4	37.1	36.4	35.6	34.6	33.3	33.6	33.7	34.2	14.4	841.9
66,0°	39.5	39.2	38.9	38.4	36.8	34.7	34.0	33.0	32.0	31.0	31.1	31.2	31.9	14.1	856.1
67,0°	38.3	38.5	38.3	37.0	33.9	31.7	31.2	30.4	29.7	28.3	28.5	28.6	29.2	14.0	870.0
68,0°	36.5	37.3	37.8	34.5	31.1	28.9	28.7	27.6	27.1	25.5	25.8	25.7	26.3	13.9	883.9
69,0°	34.9	35.9	35.7	30.9	27.9	25.4	25.4	24.7	24.6	23.4	23.6	22.9	23.8	13.9	897.8
70,0°	33.0	34.2	32.2	27.4	24.6	22.9	22.4	22.2	22.3	21.5	21.0	20.3	20.8	13.8	911.6
71,0°	30.6	31.8	28.3	23.8	22.1	20.0	19.4	19.4	20.0	19.5	18.3	17.5	17.6	13.6	925.1
72,0°	28.0	27.2	24.1	20.1	18.6	17.2	16.4	16.3	17.3	16.1	15.3	14.7	15.0	13.2	938.3

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7B75N08NA EAN: 4069025098344	LP number 59074_774
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
73,0°	314.2	327.1	363.0	397.4	422.7	442.9	443.9	424.6	388.6	334.2	283.3	254.4	265.4	296.9	310.4
74,0°	302.3	315.4	351.4	383.4	407.0	421.3	422.6	404.3	368.4	319.2	278.5	252.6	254.3	276.8	278.8
75,0°	271.9	282.4	317.5	348.3	373.3	382.5	388.8	372.7	343.4	304.4	279.4	261.8	262.3	267.5	251.6
76,0°	203.4	205.7	235.6	259.9	289.7	298.9	320.0	312.0	301.5	279.0	270.4	271.0	278.1	258.7	216.4
77,0°	127.7	125.1	141.5	158.4	183.6	190.1	209.0	211.9	225.2	227.5	246.7	272.1	287.2	232.7	167.6
78,0°	69.4	62.5	74.1	81.0	106.1	107.6	125.5	119.8	140.1	148.2	182.4	203.3	237.4	175.8	116.2
79,0°	29.2	27.1	30.4	36.2	50.1	55.6	64.6	67.3	83.0	101.9	127.0	132.3	111.3	97.4	67.9
80,0°	12.8	12.6	14.0	17.5	21.8	23.3	28.0	29.0	41.4	56.8	84.5	75.6	49.9	39.4	30.6
81,0°	7.7	8.0	8.9	10.4	11.7	11.5	12.4	12.0	15.1	20.5	28.7	25.3	16.6	15.8	13.4
82,0°	5.8	6.0	6.6	7.2	7.9	7.5	7.7	7.8	8.6	10.6	14.3	13.0	9.1	8.3	8.1
83,0°	4.4	4.5	4.9	5.1	5.5	5.4	5.4	5.6	5.8	6.4	8.8	9.1	7.0	5.9	5.9
84,0°	3.1	3.1	3.3	3.3	3.5	3.5	3.6	3.6	3.8	3.9	4.6	4.7	4.4	4.2	4.3
85,0°	2.4	2.3	2.3	2.3	2.4	2.3	2.5	2.5	2.6	2.6	2.8	2.8	2.9	2.8	3.0
86,0°	1.8	1.8	1.8	1.7	1.8	1.7	1.8	1.6	1.7	1.6	1.8	1.8	1.9	1.8	2.0
87,0°	1.4	1.4	1.4	1.3	1.3	1.3	1.2	1.2	1.2	1.2	1.2	1.1	1.1	1.2	1.2
88,0°	1.1	1.1	1.1	1.0	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.8	0.8	0.8	0.8
89,0°	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.8	0.8	0.7	0.8	0.7	0.7	0.7	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family
Streetlight 31 midi toolless

Order number: 5XH7B75N08NA
EAN: 4069025098344

LP number
59074_774

siteco

C- planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
73,0°	308.3	289.8	248.1	201.6	148.8	101.1	66.6	46.0	32.7	28.1	26.8	25.7	25.0	24.3	22.6
74,0°	264.8	245.1	208.3	168.0	120.8	81.4	53.7	38.2	29.2	25.7	24.6	23.7	23.1	22.3	20.7
75,0°	221.4	197.5	168.0	137.9	96.7	64.3	42.4	32.1	26.6	23.9	22.7	22.1	21.1	20.4	18.8
76,0°	170.0	141.6	116.1	96.9	66.0	46.5	33.7	27.6	23.9	22.0	20.8	20.3	18.8	18.0	16.6
77,0°	115.1	88.3	66.5	54.7	37.9	29.4	24.9	23.6	21.5	19.9	18.7	18.0	16.1	15.0	13.9
78,0°	76.5	58.2	42.9	33.1	24.2	20.5	19.2	19.7	18.8	17.7	16.6	16.0	13.8	12.5	11.6
79,0°	51.1	41.7	30.0	23.4	18.1	15.9	14.7	15.6	15.2	15.4	14.3	13.4	11.4	10.3	9.3
80,0°	27.2	25.0	20.1	16.4	13.4	11.9	11.1	11.4	11.9	13.0	12.3	11.1	9.1	8.2	7.6
81,0°	11.7	12.0	11.9	11.4	9.8	9.0	8.5	8.7	9.5	10.7	10.3	9.2	7.2	6.5	6.0
82,0°	7.4	7.2	7.5	7.3	6.8	6.7	6.6	6.8	7.5	8.7	8.4	7.3	5.7	5.0	4.6
83,0°	5.7	5.7	5.8	5.1	4.8	4.9	4.8	5.2	5.6	6.5	6.1	5.3	4.3	3.8	3.5
84,0°	4.3	4.5	4.4	3.8	3.4	3.3	3.3	3.6	3.8	4.5	4.3	3.9	3.2	2.9	2.7
85,0°	3.1	3.3	3.2	2.8	2.4	2.3	2.2	2.2	2.3	2.8	2.6	2.5	2.1	2.1	1.9
86,0°	2.0	2.2	2.1	2.0	1.7	1.7	1.5	1.5	1.4	1.5	1.4	1.5	1.4	1.4	1.3
87,0°	1.2	1.4	1.3	1.3	1.1	1.1	1.0	1.0	0.9	1.0	0.9	1.0	0.9	0.9	0.9
88,0°	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.6	0.6	0.6	0.6	0.6	0.6	0.6
89,0°	0.6	0.6	0.6	0.6	0.6	0.5	0.5	0.5	0.5	0.5	0.4	0.4	0.5	0.4	0.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family
Streetlight 31 midi toolless

Order number: 5XH7B75N08NA
EAN: 4069025098344

LP number
59074_774

siteco

C- planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
73,0°	21.3	20.0	19.0	18.2	17.6	17.4	17.7	313.3	276.8	182.6	96.1	62.4	48.6	36.4	28.9
74,0°	19.7	18.1	17.0	16.2	15.6	15.3	15.5	298.9	258.9	160.8	84.5	62.2	47.9	34.5	26.9
75,0°	18.1	16.5	15.3	14.4	13.8	13.6	13.6	264.0	223.5	129.7	69.4	55.9	45.5	31.7	24.5
76,0°	16.3	14.7	13.7	12.7	12.1	11.7	11.8	192.6	158.3	84.1	46.3	41.8	38.2	28.2	21.4
77,0°	14.0	12.6	11.8	10.9	10.4	9.8	9.9	119.2	94.7	47.7	27.5	30.6	30.2	25.2	18.9
78,0°	12.0	10.8	10.1	9.4	8.8	8.3	8.4	60.8	51.0	28.7	23.6	31.7	31.7	27.0	18.5
79,0°	9.9	8.8	8.6	7.8	7.4	6.8	6.9	26.2	24.1	20.1	24.0	34.5	38.1	31.6	19.5
80,0°	7.8	7.1	6.8	6.2	5.7	5.4	5.4	11.7	11.9	13.1	17.9	27.0	35.6	31.7	18.8
81,0°	6.3	5.7	5.4	4.9	4.6	4.3	4.3	7.2	7.1	7.6	9.6	14.8	24.3	24.2	14.8
82,0°	4.8	4.3	4.1	3.9	3.7	3.5	3.5	5.5	5.5	5.5	6.1	7.9	14.2	14.8	9.6
83,0°	3.5	3.2	3.1	3.1	2.9	2.8	2.8	4.2	4.2	4.2	4.5	4.9	6.9	7.1	5.4
84,0°	2.6	2.5	2.3	2.3	2.3	2.2	2.2	3.1	3.2	3.2	3.3	3.4	3.6	3.5	3.2
85,0°	1.9	1.7	1.7	1.6	1.6	1.5	1.6	2.3	2.4	2.4	2.5	2.4	2.4	2.3	2.3
86,0°	1.3	1.2	1.1	1.1	1.1	1.1	1.1	1.8	1.9	1.8	1.9	1.8	1.9	1.7	1.8
87,0°	0.9	0.8	0.8	0.7	0.7	0.7	0.8	1.4	1.5	1.4	1.5	1.5	1.4	1.4	1.4
88,0°	0.5	0.5	0.5	0.5	0.5	0.5	0.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
89,0°	0.4	0.4	0.4	0.3	0.3	0.3	0.4	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7B75N08NA EAN: 4069025098344	LP number 59074_774
siteco		

C- planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
73,0°	24.9	24.3	24.5	25.3	25.5	25.7	25.5	25.6	25.6	25.7	25.5	25.3	24.2	24.2	24.3
74,0°	22.7	21.8	22.0	23.1	23.1	23.3	23.3	23.1	23.0	23.0	22.3	21.8	21.3	22.1	22.2
75,0°	20.1	19.3	19.5	20.0	20.1	20.7	20.5	20.1	19.5	19.2	18.5	18.6	18.7	19.6	20.1
76,0°	17.5	16.8	17.0	17.6	17.7	18.1	17.8	17.2	16.6	16.1	16.0	16.1	16.1	16.5	17.1
77,0°	15.2	14.8	14.8	15.1	14.9	15.8	14.9	14.7	13.6	13.6	13.1	13.4	12.7	13.5	13.5
78,0°	13.3	13.0	12.8	12.6	12.4	13.0	12.1	11.6	11.1	10.9	10.7	10.7	10.4	10.5	10.3
79,0°	12.2	11.5	11.0	10.5	10.6	10.6	9.8	9.6	9.0	8.8	8.6	8.6	8.3	8.5	8.1
80,0°	10.6	9.9	9.3	8.2	8.3	8.6	8.1	7.7	7.2	6.8	6.6	6.5	6.1	6.1	6.0
81,0°	8.5	8.0	7.5	6.6	6.6	6.8	6.6	6.2	5.6	5.3	5.0	4.8	4.6	4.6	4.5
82,0°	6.3	6.0	5.6	5.1	5.1	5.3	5.1	4.9	4.4	4.1	3.7	3.6	3.3	3.2	3.2
83,0°	4.4	4.3	4.0	3.8	3.7	3.8	3.8	3.5	3.1	2.9	2.7	2.6	2.4	2.4	2.2
84,0°	3.0	3.0	2.8	2.7	2.7	2.8	2.7	2.5	2.2	2.1	2.0	2.0	1.8	1.7	1.6
85,0°	2.2	2.2	2.0	2.0	1.8	1.9	1.7	1.8	1.5	1.5	1.3	1.3	1.2	1.1	0.9
86,0°	1.7	1.7	1.6	1.4	1.4	1.3	1.2	1.2	1.1	1.0	0.9	0.9	0.8	0.8	0.7
87,0°	1.4	1.3	1.3	1.2	1.2	1.1	1.1	1.0	0.9	0.9	0.8	0.7	0.7	0.7	0.6
88,0°	1.2	1.1	1.1	1.0	1.0	1.0	0.9	0.9	0.8	0.8	0.7	0.7	0.7	0.6	0.5
89,0°	1.0	1.0	1.0	0.9	0.9	0.9	0.8	0.8	0.8	0.7	0.7	0.7	0.6	0.6	0.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C- planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
73,0°	25.2	23.7	20.7	17.3	15.7	14.3	13.6	13.2	13.9	12.2	11.9	11.5	12.0	12.5	950.9
74,0°	22.7	20.6	17.8	14.9	13.0	11.5	11.0	10.5	10.8	9.4	9.0	8.5	8.6	11.7	962.5
75,0°	19.7	17.1	15.0	13.1	11.1	9.5	9.0	8.4	8.6	7.4	7.0	6.4	6.5	10.6	973.1
76,0°	16.2	14.3	12.8	11.1	9.6	8.0	7.3	6.7	6.5	5.6	5.1	4.7	4.8	8.7	981.9
77,0°	13.4	11.9	10.7	9.0	7.7	6.2	6.0	5.0	4.6	3.7	3.4	2.9	3.1	6.4	988.3
78,0°	10.5	9.9	8.8	7.2	5.7	4.7	4.3	3.6	3.1	2.4	2.0	1.7	1.7	4.4	992.7
79,0°	8.3	7.6	6.9	5.6	4.5	3.8	3.4	2.7	2.2	1.6	1.2	1.0	1.0	2.8	995.4
80,0°	6.2	5.6	5.3	4.3	3.5	2.9	2.4	1.9	1.6	1.1	0.8	0.7	0.7	1.7	997.1
81,0°	4.5	4.1	4.0	3.2	2.6	2.2	1.9	1.5	1.2	0.9	0.7	0.5	0.5	0.9	998.0
82,0°	3.2	3.0	3.0	2.4	2.0	1.6	1.4	1.1	0.9	0.6	0.5	0.5	0.5	0.6	998.6
83,0°	2.0	2.1	2.2	1.7	1.4	1.2	1.0	0.8	0.6	0.5	0.5	0.4	0.4	0.4	999.1
84,0°	1.5	1.6	1.5	1.1	1.0	0.8	0.7	0.6	0.5	0.4	0.4	0.3	0.3	0.3	999.4
85,0°	1.0	1.0	1.0	0.7	0.7	0.5	0.5	0.4	0.4	0.3	0.3	0.3	0.3	0.2	999.6
86,0°	0.6	0.6	0.5	0.5	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.1	999.7
87,0°	0.5	0.5	0.5	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.3	0.2	0.2	0.1	999.8
88,0°	0.5	0.5	0.4	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.3	0.2	0.2	0.1	999.9
89,0°	0.5	0.5	0.4	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.2	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7B75N08NA EAN: 4069025098344	LP number 59074_774
--	--	------------------------

Dimming levels table	environmental temperature: 25°C	siteco
----------------------	---------------------------------	--------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	18260	149.4	163.4	156.4
95	239	252	17375	140.0	152.6	146.3
90	223	249	16405	130.0	141.7	135.8
85	209	247	15533	121.6	132.4	127.0
80	195	244	14638	113.1	123.0	118.0
75	181	242	13723	104.7	113.9	109.3
70	167	239	12787	96.4	104.8	100.6
65	154	236	11900	88.8	96.4	92.6
60	140	232	10923	80.6	87.5	84.0
55	128	229	10070	73.6	79.9	76.8
50	115	225	9130	66.1	71.7	68.9
45	103	221	8247	59.2	64.2	61.7
40	90	216	7276	51.8	56.1	54.0
35	78	211	6366	44.8	48.7	46.8
30	66	205	5442	38.1	41.3	39.7
25	55	198	4581	32.0	34.6	33.3
20	43	189	3632	25.4	27.4	26.4
15	32	178	2747	19.5	21.0	20.2
10	21	163	1855	13.6	14.6	14.1
10	20	161	1773	13.1	14.0	13.6

Dimming levels table	environmental temperature: 5°C
----------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	18860	151.2	165.3	158.2
95	239	252	17916	141.7	154.5	148.1
90	224	249	16952	132.3	144.2	138.2
85	210	247	16031	123.7	134.6	129.2
80	196	245	15090	115.2	125.2	120.2
75	182	242	14133	106.7	116.0	111.4
70	169	239	13229	98.9	107.4	103.2
65	155	236	12238	90.6	98.3	94.4
60	142	233	11298	82.8	90.0	86.4
55	129	229	10345	75.3	81.7	78.5
50	117	226	9452	68.3	74.0	71.2
45	104	221	8469	60.7	65.8	63.2
40	92	217	7552	53.7	58.2	56.0
35	80	212	6621	46.7	50.6	48.7
30	68	206	5680	39.8	43.1	41.4
25	56	199	4724	33.1	35.7	34.4
20	44	190	3759	26.4	28.4	27.4
15	33	179	2862	20.4	21.9	21.2
10	21	163	1875	13.8	14.8	14.3
10	20	161	1792	13.3	14.2	13.8

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7B75N08NA EAN: 4069025098344	LP number 59074_774
Dimming levels table environmental temperature: 15°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	18580	150.2	164.3	157.2
95	239	252	17664	140.8	153.5	147.2
90	224	249	16727	131.5	143.3	137.4
85	209	247	15764	122.4	133.2	127.8
80	195	244	14845	113.8	123.8	118.8
75	181	242	13907	105.3	114.6	110.0
70	168	239	13019	97.6	106.0	101.8
65	154	236	12044	89.4	97.1	93.2
60	141	232	11120	81.7	88.8	85.2
55	129	229	10252	74.7	81.1	77.9
50	116	225	9298	67.2	72.9	70.1
45	103	221	8328	59.6	64.7	62.2
40	91	216	7420	52.7	57.2	55.0
35	79	211	6498	45.8	49.7	47.8
30	67	205	5564	39.0	42.1	40.6
25	55	198	4616	32.2	34.8	33.5
20	44	190	3738	26.2	28.2	27.2
15	32	178	2766	19.7	21.1	20.4
10	21	163	1866	13.7	14.7	14.2
10	20	161	1784	13.2	14.1	13.6

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7B75N08NA EAN: 4069025098344	LP number 59074_774
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
25.0	18260.0	149.4
5.0	18860.0	151.2
15.0	18580.0	150.2