

Photometric test report

Family
Streetlight 31 midi toolless

Order number: 5XH7H75N08LA
EAN: 4069025099907

LP number
59066_2319



Version post-top or side-entry mounting, NEMA 7 pin (DALI)
Optic direct, asymmetric A520002
Cover toughened safety glass
Lamps LED 2200 K | CRI ≥ 70
Controlgear ECG SITECO
Rated values Net luminous flux = 10460 lm
 Power consumption = 86.6 W
 Luminous efficacy = 120.8 lm/W

serial
documentation
20.03.2025

siteco

Luminous intensity in cd/klm


C180-0

C215-35

C217,5-37,5

C270-90

Imax: 990 cd/klm

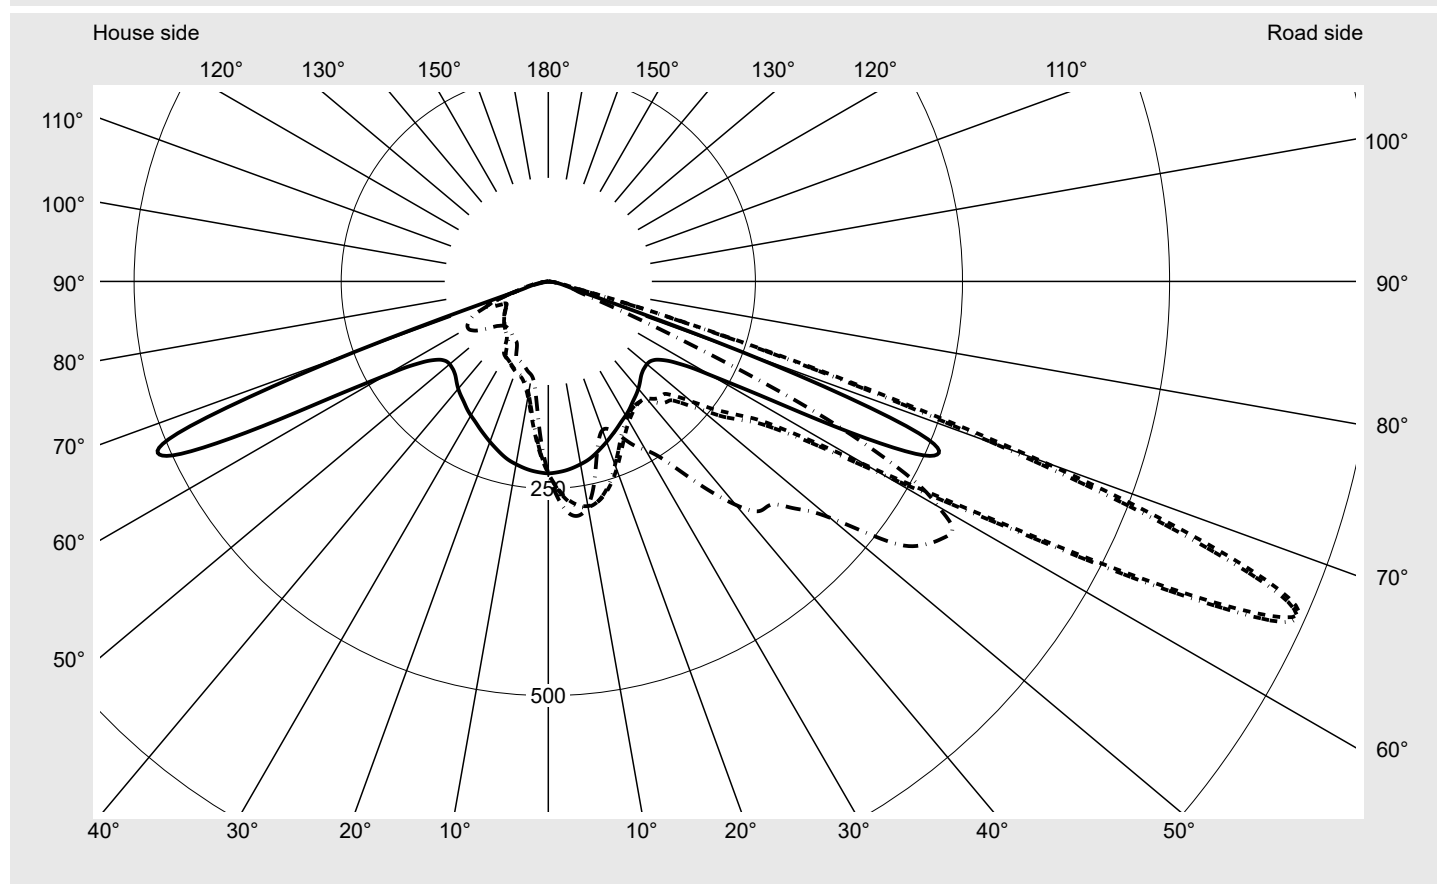

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2


Class:	G3
Imax 70°	685.4
Imax 80°	32.5
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7H75N08LA EAN: 4069025099907	LP number 59066_2319
Envelope curve in cd/klm KMK 66° KMK 65° KMK 64° KMK 63°		siteco

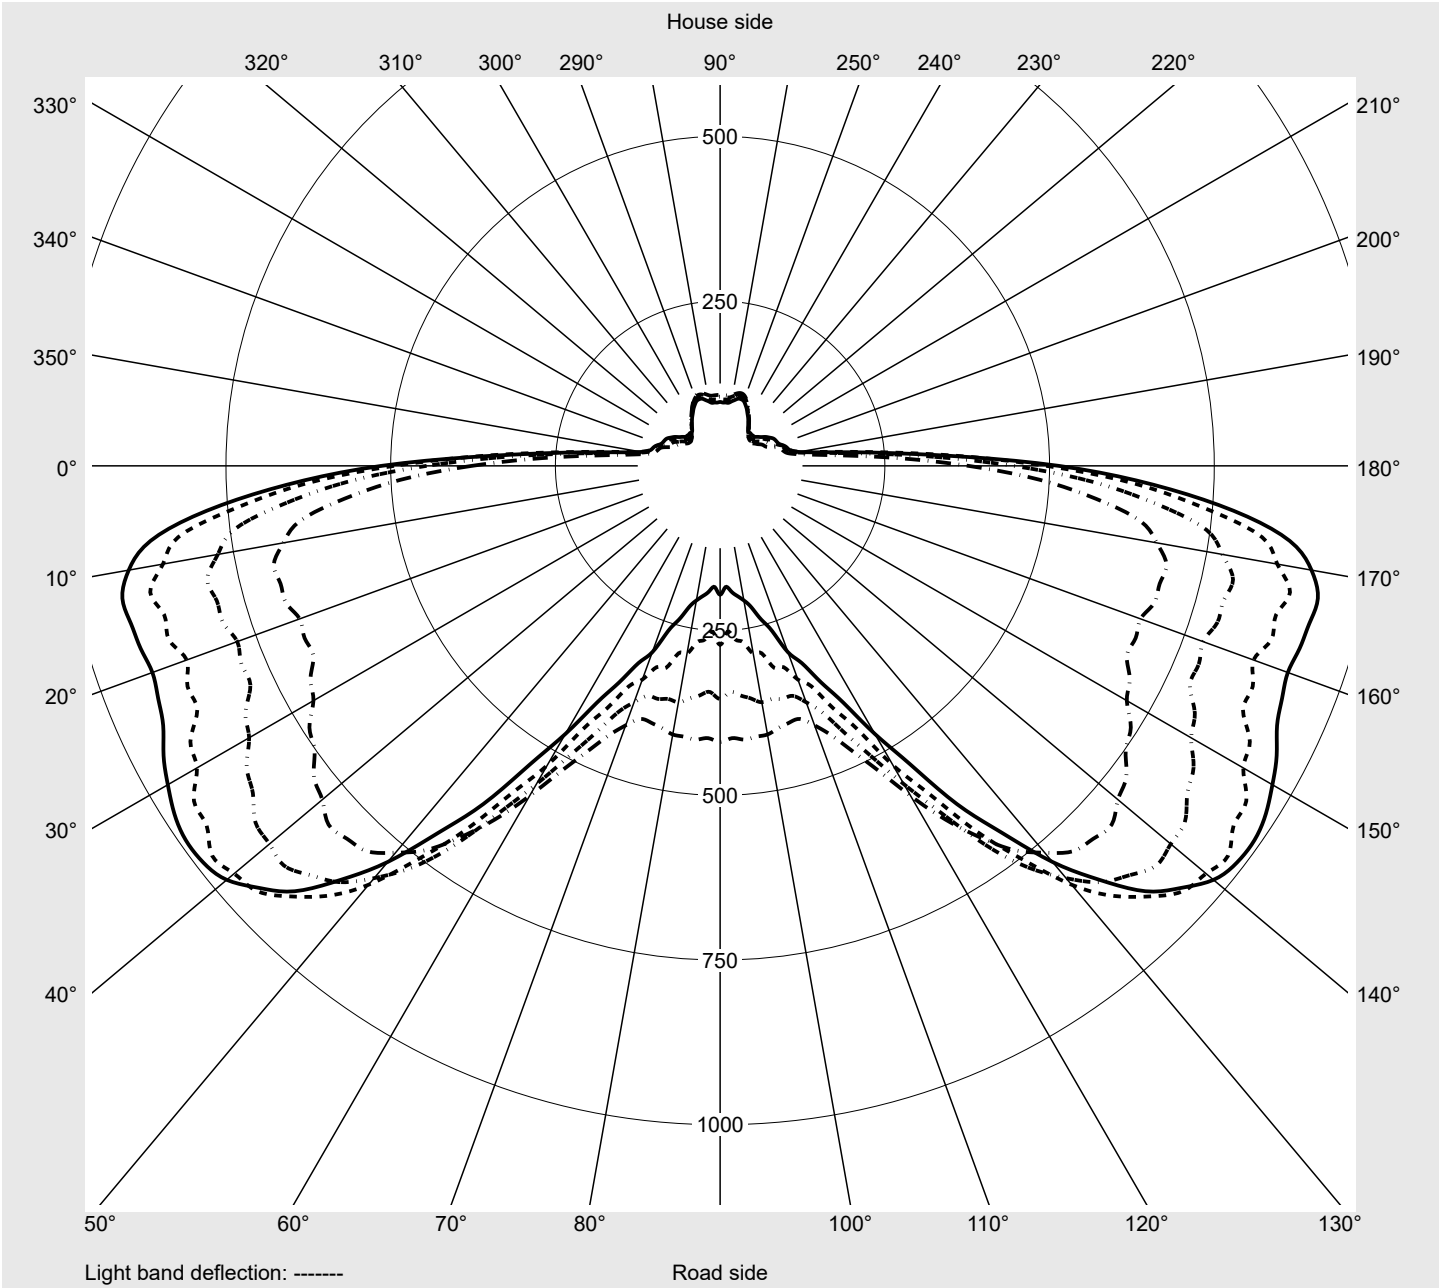

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7H75N08LA EAN: 4069025099907	LP number 59066_2319
--	--	-------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6
2,5°	230.8	232.1	233.5	235.0	236.4	238.0	239.2	240.8	242.2	243.7	244.7	246.0	247.0	248.4	249.3
5,0°	229.3	232.1	235.0	237.8	240.5	243.5	246.0	248.8	251.2	253.8	255.7	258.0	259.7	261.9	263.5
7,5°	227.0	231.2	235.4	239.5	243.3	247.2	250.8	254.3	257.4	260.6	263.2	265.8	268.0	270.2	272.1
10,0°	224.1	229.7	235.1	240.2	244.8	249.6	253.9	257.8	261.5	264.7	267.4	269.7	272.0	273.9	275.3
12,5°	220.8	227.4	233.9	239.8	245.2	250.5	255.1	259.2	262.7	265.7	268.2	270.0	271.5	272.2	272.9
15,0°	216.3	223.7	231.1	237.8	243.7	249.2	254.1	258.2	261.5	263.8	265.7	266.4	266.8	266.1	265.4
17,5°	211.1	219.7	227.9	235.1	241.3	247.0	251.9	255.6	258.4	259.9	260.5	260.0	258.9	256.8	254.3
20,0°	206.0	215.3	224.3	232.1	238.6	244.3	249.2	252.2	254.3	254.4	254.0	251.4	249.2	244.8	241.1
22,5°	200.8	211.2	221.0	229.4	236.2	241.9	246.2	248.6	249.4	248.2	246.1	242.2	237.9	232.5	227.1
25,0°	195.8	207.2	218.1	226.9	234.0	239.6	243.3	244.7	244.4	241.7	238.3	232.4	227.1	220.2	214.2
27,5°	190.9	203.6	215.3	225.0	232.4	237.9	240.9	241.5	239.8	235.9	230.6	223.8	216.8	209.7	203.2
30,0°	186.8	200.6	213.2	223.7	231.5	237.0	239.4	238.8	235.9	230.4	223.9	216.1	208.4	201.0	194.9
32,5°	182.5	197.3	211.0	222.2	230.5	235.8	237.5	236.0	232.1	225.4	217.9	209.1	201.4	194.1	188.7
35,0°	177.6	193.9	208.6	220.8	229.5	234.6	235.6	233.2	228.2	220.8	212.4	203.4	195.6	189.1	184.4
37,5°	173.5	191.2	207.1	220.1	228.6	233.4	234.1	231.1	225.0	216.7	207.7	198.7	191.0	185.4	182.5
40,0°	169.1	188.4	205.3	218.3	227.6	232.7	233.2	229.4	222.7	214.0	204.7	196.0	189.0	185.2	184.7
42,5°	164.0	184.7	202.5	217.7	227.6	233.1	233.4	229.1	221.7	212.6	203.4	195.4	190.3	189.1	192.0
45,0°	159.1	180.8	200.1	216.8	227.3	232.5	231.9	226.5	218.1	208.1	198.9	191.2	187.9	188.7	194.7
46,0°	157.8	179.9	200.1	217.5	228.1	233.2	232.3	226.3	217.0	206.6	197.0	189.7	186.7	188.6	195.5
47,0°	156.7	179.5	200.9	218.9	230.0	235.2	233.9	227.5	217.7	206.9	197.3	190.6	188.6	192.0	200.3
48,0°	156.1	179.8	202.1	221.0	232.4	237.9	236.5	229.8	219.7	209.2	199.4	193.6	192.4	197.4	207.1
49,0°	155.6	180.5	204.0	224.2	235.9	242.0	239.9	233.7	223.2	212.9	202.9	198.6	198.0	205.1	215.2
50,0°	155.4	181.5	206.6	227.9	240.4	246.6	244.9	238.4	227.9	217.4	208.6	204.7	205.9	213.5	225.4
51,0°	155.6	183.4	210.0	232.5	245.5	252.1	250.6	244.1	233.8	223.6	215.5	212.7	215.0	223.6	236.0
52,0°	156.5	186.4	214.6	238.5	252.7	259.8	258.3	251.4	241.1	231.7	224.6	222.9	226.3	235.7	248.7
53,0°	158.2	190.2	220.0	245.5	260.8	268.3	266.7	259.9	249.5	240.4	233.8	233.0	237.2	247.0	259.7
54,0°	160.8	195.0	227.2	254.3	270.6	278.7	276.8	269.9	259.3	250.3	244.2	244.0	248.1	257.9	270.2
55,0°	165.0	202.0	236.7	266.3	283.7	292.2	290.2	283.0	272.0	262.5	256.4	256.1	260.8	270.5	281.8
56,0°	170.4	210.7	248.2	280.4	298.7	307.9	305.3	298.2	286.1	276.2	269.4	269.7	273.9	283.6	294.0
57,0°	177.7	223.0	262.3	299.8	316.8	329.5	324.0	318.7	302.6	295.2	285.9	289.1	290.8	303.2	311.4
58,0°	188.5	238.1	282.9	322.2	342.1	354.2	349.7	342.4	327.5	318.8	311.1	314.1	318.0	331.0	340.5
59,0°	202.8	259.2	308.4	353.4	373.8	388.0	382.3	376.1	359.5	353.2	345.2	351.7	355.6	371.7	381.9
60,0°	226.7	292.6	348.5	400.9	422.6	439.3	432.7	428.0	410.5	408.2	401.1	412.1	417.2	437.5	446.9
61,0°	258.9	337.3	402.8	461.1	485.1	504.4	496.9	495.0	478.9	479.9	474.0	489.2	495.1	517.8	526.5
62,0°	305.9	397.9	474.0	538.2	566.1	585.7	580.0	579.3	566.8	569.4	566.9	583.1	592.2	615.2	626.6
63,0°	376.8	485.7	572.4	643.8	673.0	693.9	690.7	691.1	679.0	682.7	681.2	701.0	712.7	739.1	751.5
64,0°	445.5	568.1	665.1	744.5	774.1	797.4	790.9	791.3	779.9	786.4	786.6	812.3	825.4	852.0	865.8
65,0°	495.0	632.1	738.6	829.7	858.7	886.0	873.6	877.2	861.5	875.0	875.6	906.4	916.8	946.9	951.5
66,0°	513.8	658.5	782.3	871.9	911.4	929.3	925.7	922.2	917.0	923.1	932.7	952.3	967.9	982.2	990.2
67,0°	508.5	661.1	795.9	889.2	934.5	951.1	947.5	940.1	933.8	932.2	938.8	945.2	958.1	960.7	964.9
68,0°	466.0	617.4	764.5	863.0	925.7	939.0	938.7	922.0	913.7	896.4	897.6	890.7	899.1	886.6	886.2
69,0°	371.7	497.6	641.9	733.7	818.0	835.7	853.6	833.8	831.3	805.0	808.8	792.2	799.4	776.0	771.5
70,0°	249.4	329.2	462.6	512.5	616.1	619.2	684.6	658.9	685.4	649.9	668.6	640.4	659.0	623.9	631.0
71,0°	120.6	165.3	231.1	264.3	329.8	356.3	414.7	435.7	481.5	475.9	492.1	480.1	491.4	471.4	468.5
72,0°	57.4	71.1	94.1	106.4	137.1	155.7	195.8	224.8	285.6	304.7	329.0	324.3	338.2	325.6	326.9

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7H75N08LA EAN: 4069025099907	LP number 59066_2319
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6
2,5°	250.6	251.2	252.4	253.0	254.3	254.8	255.7	256.1	257.0	257.4	258.3	258.7	259.6	259.8	260.5
5,0°	265.5	266.7	268.4	269.4	271.0	271.9	273.4	273.9	275.2	275.7	277.0	277.3	278.4	278.6	279.4
7,5°	273.9	275.4	276.8	277.9	279.1	280.0	280.8	281.5	282.1	282.5	283.0	283.5	283.7	284.0	284.2
10,0°	276.5	277.5	278.1	278.5	278.5	278.7	278.5	278.5	277.9	277.8	277.1	277.1	276.5	276.5	275.8
12,5°	272.7	272.7	271.5	271.0	269.2	268.5	266.3	265.5	262.9	262.2	259.5	259.0	256.6	256.4	254.1
15,0°	263.6	262.1	259.2	257.0	253.5	250.9	247.5	245.1	241.5	239.2	235.9	234.3	231.3	230.0	227.6
17,5°	250.9	247.5	243.2	239.5	235.1	231.3	227.1	223.6	219.8	216.9	213.7	211.6	209.1	207.4	205.7
20,0°	235.6	231.8	225.5	221.6	215.9	212.5	207.7	205.2	201.3	199.5	196.7	195.5	193.5	193.1	191.7
22,5°	221.1	215.7	209.8	205.4	200.9	197.8	194.8	192.9	191.1	190.2	189.4	189.2	189.2	189.4	189.8
25,0°	207.5	202.8	197.5	194.4	191.1	189.7	188.6	188.6	189.4	190.0	191.6	192.5	194.4	195.2	197.3
27,5°	197.7	193.5	190.0	188.3	187.7	188.4	190.0	192.4	195.5	198.5	201.5	203.9	206.2	207.7	209.5
30,0°	190.2	187.3	185.7	186.1	188.0	191.3	195.8	200.9	206.5	211.1	215.5	217.9	220.1	221.0	222.6
32,5°	185.1	183.8	184.2	186.7	191.2	197.3	204.6	211.8	219.6	225.3	230.7	233.3	235.9	236.5	238.9
35,0°	182.5	182.9	185.7	190.5	197.4	205.9	215.5	224.8	234.4	242.3	249.2	253.7	257.2	259.8	263.6
37,5°	182.7	185.8	191.6	199.1	209.1	220.7	233.2	245.6	258.3	268.5	277.7	283.9	289.9	294.3	299.7
40,0°	187.9	194.3	203.9	215.0	229.1	243.5	259.2	274.0	289.7	301.3	312.2	318.8	325.4	328.9	334.1
42,5°	199.3	210.1	224.3	239.2	256.1	273.1	289.7	304.7	319.3	330.8	340.2	346.9	351.7	354.8	358.5
45,0°	204.5	217.9	233.2	249.0	265.0	280.5	294.0	306.4	317.4	327.0	334.8	340.6	344.7	348.4	352.6
46,0°	206.5	220.9	237.3	253.7	269.6	284.3	296.6	307.8	317.5	325.9	333.1	338.9	343.3	347.8	353.1
47,0°	212.7	228.1	245.0	261.0	276.5	289.8	301.0	310.7	319.2	326.6	334.2	340.8	346.4	352.1	358.9
48,0°	220.9	236.3	253.2	268.7	283.5	295.6	305.5	313.6	321.4	328.4	336.6	344.1	351.5	358.4	366.8
49,0°	230.7	245.4	262.5	276.7	290.9	301.0	310.1	316.8	324.1	330.9	339.9	348.5	358.2	365.9	376.3
50,0°	240.7	256.0	271.5	285.4	297.9	307.1	314.6	320.4	327.1	334.5	344.0	354.1	364.5	374.0	385.5
51,0°	251.4	266.4	281.1	293.5	304.7	312.7	318.9	324.1	330.5	338.5	348.6	359.7	371.7	383.2	397.5
52,0°	263.7	277.7	290.8	301.8	311.4	318.2	323.3	328.0	334.7	343.1	354.5	367.8	383.9	399.7	418.6
53,0°	273.9	286.9	298.6	308.1	316.2	322.1	326.7	331.5	338.9	349.1	364.7	382.0	402.7	421.5	442.5
54,0°	283.5	295.3	306.0	314.2	320.6	325.7	330.5	336.3	347.4	362.2	382.9	403.3	427.0	448.0	468.4
55,0°	293.9	304.3	313.9	320.8	327.0	332.2	339.4	350.0	367.8	386.9	411.5	433.6	455.3	472.0	486.9
56,0°	305.8	315.2	324.4	330.5	338.2	345.8	359.1	374.9	398.3	418.2	442.5	458.6	472.7	484.1	495.5
57,0°	326.3	332.2	344.5	348.0	361.4	371.7	397.0	411.3	439.6	451.4	468.8	475.4	484.0	490.3	499.6
58,0°	355.1	362.7	375.0	381.7	400.5	418.3	444.6	461.3	478.0	482.6	488.9	489.6	490.8	493.8	501.5
59,0°	399.4	405.6	421.8	431.9	458.5	477.3	502.4	507.9	514.5	509.9	507.2	500.1	495.8	495.0	499.9
60,0°	466.4	472.7	495.5	509.7	542.1	553.6	566.0	559.6	554.3	538.4	524.6	508.9	496.8	490.4	488.2
61,0°	548.8	556.9	585.1	600.9	627.0	625.8	625.2	606.8	588.1	560.5	536.1	511.6	489.7	475.0	464.7
62,0°	648.8	661.9	690.0	699.6	708.4	696.2	680.6	650.3	616.5	577.3	539.0	501.5	470.3	452.2	441.2
63,0°	776.9	788.2	806.0	800.6	793.3	766.4	735.4	688.6	636.5	578.4	522.3	479.1	443.2	419.1	402.8
64,0°	888.9	892.8	897.9	878.6	856.9	816.8	768.4	702.3	624.6	557.9	497.0	447.2	404.8	381.9	366.0
65,0°	971.8	962.7	954.7	924.1	885.4	829.8	752.1	676.0	590.1	524.8	450.2	405.9	362.2	345.2	320.4
66,0°	988.9	977.5	948.3	913.1	852.2	784.8	701.4	626.6	537.4	470.0	405.4	362.7	324.0	301.0	263.1
67,0°	949.7	932.5	888.7	849.7	775.5	711.3	627.4	556.9	475.6	420.4	360.1	318.1	277.7	257.2	212.6
68,0°	855.2	831.2	772.5	730.8	655.3	598.9	524.2	472.3	406.6	355.2	298.2	265.8	236.2	218.4	168.6
69,0°	731.2	703.7	643.1	604.5	535.5	491.5	437.0	393.4	330.4	293.0	253.4	228.5	201.7	185.0	134.8
70,0°	577.9	565.0	499.2	476.7	415.0	393.7	332.9	307.3	263.9	243.4	207.5	190.7	164.7	152.0	105.1
71,0°	434.8	414.3	373.8	351.6	310.3	282.6	253.4	237.7	210.9	192.0	167.9	152.1	133.3	121.0	84.2
72,0°	303.8	292.7	265.7	246.0	214.4	207.7	189.9	180.5	162.0	149.7	132.0	120.1	105.5	96.4	69.2

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7H75N08LA EAN: 4069025099907	LP number 59066_2319
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6
2,5°	260.4	260.9	260.8	261.4	261.2	261.6	261.3	229.1	227.6	225.9	224.4	222.7	221.6	219.9	218.8
5,0°	279.4	280.0	280.0	280.6	280.5	281.0	280.5	225.9	222.7	219.1	216.1	212.4	209.6	205.9	203.2
7,5°	284.2	284.2	284.5	284.5	284.7	284.7	284.9	221.9	216.9	211.7	206.8	201.5	196.9	191.7	187.1
10,0°	275.8	275.1	275.4	274.9	275.4	274.9	275.3	217.6	211.1	204.2	197.7	190.9	184.8	178.2	172.3
12,5°	254.3	252.3	253.2	251.7	253.1	251.8	253.1	212.7	204.8	196.5	188.9	180.5	173.5	165.6	159.3
15,0°	227.1	225.2	225.0	223.7	224.2	223.3	224.0	206.7	197.4	188.0	179.0	169.8	162.0	153.9	147.0
17,5°	204.7	203.5	203.0	202.2	202.2	201.8	202.0	200.6	190.0	179.6	169.5	159.8	151.4	143.4	136.9
20,0°	191.7	191.0	191.2	190.6	191.0	190.7	191.1	193.9	182.7	170.6	160.5	149.8	141.9	134.0	128.7
22,5°	190.2	191.0	191.7	192.5	193.0	193.5	193.6	187.7	175.0	162.5	151.4	141.0	133.0	126.4	121.7
25,0°	198.2	200.7	201.9	204.3	204.9	206.9	206.2	181.4	167.9	154.6	143.4	133.2	126.1	120.0	116.6
27,5°	211.3	214.1	217.1	219.8	221.7	222.7	222.7	175.7	161.0	147.6	136.1	126.7	120.0	115.4	112.9
30,0°	224.3	227.9	232.0	235.6	236.6	235.9	235.1	170.3	154.9	141.0	129.6	120.7	114.9	111.3	109.6
32,5°	240.8	246.6	251.4	255.8	254.7	253.5	252.0	164.7	148.5	134.3	123.3	115.0	110.3	107.5	106.2
35,0°	268.7	276.4	281.5	283.5	282.0	281.5	281.2	158.8	141.7	127.7	117.1	110.0	106.1	104.1	103.1
37,5°	304.7	311.0	314.1	315.7	315.8	317.2	317.5	153.0	135.2	121.2	111.2	105.0	102.3	100.8	100.0
40,0°	337.5	343.5	346.4	349.2	349.3	351.9	352.2	147.2	128.9	114.9	105.8	100.6	98.7	97.6	97.0
42,5°	362.4	367.0	370.2	372.4	373.5	375.5	376.2	140.9	122.3	108.9	100.8	96.8	95.4	94.4	93.6
45,0°	358.7	364.3	369.8	373.7	376.8	380.1	381.0	135.0	115.9	103.1	96.1	93.3	92.2	91.3	90.5
46,0°	360.7	368.3	375.1	380.1	383.5	387.2	388.4	133.0	113.9	101.2	94.6	92.0	91.1	90.0	89.3
47,0°	367.5	377.2	385.0	391.0	395.0	399.0	400.4	131.3	111.8	99.2	93.1	90.7	89.6	88.7	88.0
48,0°	375.6	387.1	395.5	402.4	406.0	410.7	411.8	129.8	110.0	97.6	91.9	89.5	88.6	87.5	86.9
49,0°	384.8	397.9	406.2	414.8	418.0	424.4	424.5	128.3	108.4	96.0	90.6	88.2	87.5	86.4	85.7
50,0°	396.0	410.0	420.8	430.9	436.2	442.8	443.7	127.4	106.8	94.6	89.3	87.2	86.4	85.4	84.6
51,0°	411.8	428.8	442.2	454.1	461.0	467.8	469.2	126.7	105.6	93.4	88.2	86.2	85.4	84.4	83.6
52,0°	435.8	454.7	468.9	482.4	489.8	498.2	499.3	126.4	104.5	92.2	87.3	85.4	84.6	83.6	82.4
53,0°	461.4	482.3	496.6	509.6	517.3	524.9	526.7	126.5	103.7	91.4	86.4	84.7	83.7	83.0	81.2
54,0°	486.3	504.2	516.5	527.8	535.2	541.5	543.7	127.4	103.5	90.7	85.9	84.1	83.1	82.4	79.9
55,0°	502.0	517.7	528.8	538.1	545.5	551.4	553.9	128.9	103.6	90.2	85.3	83.5	82.5	81.7	78.4
56,0°	509.0	524.3	535.7	545.5	553.6	559.9	562.2	131.6	104.4	90.1	85.0	83.0	82.2	81.4	76.7
57,0°	513.0	530.3	542.0	552.3	560.1	566.9	568.6	135.6	106.0	90.7	85.1	83.0	82.1	81.0	75.1
58,0°	516.1	532.7	545.9	556.0	564.9	570.9	573.3	141.7	109.0	92.0	85.5	83.4	82.3	81.1	73.4
59,0°	513.9	528.3	541.3	549.1	558.4	562.3	566.7	150.7	113.6	94.1	86.6	84.0	82.9	81.4	72.4
60,0°	498.1	506.1	517.8	523.8	534.2	538.2	543.3	166.2	121.4	98.4	88.8	85.7	84.6	82.5	72.4
61,0°	471.3	480.1	492.8	500.0	510.2	512.5	518.2	187.6	133.2	104.9	92.4	88.3	86.8	84.4	73.8
62,0°	444.4	449.1	458.1	462.5	469.4	469.7	475.2	219.1	151.6	114.8	98.2	92.8	90.7	87.5	77.2
63,0°	403.7	407.6	414.0	414.7	417.1	413.7	419.1	270.0	182.5	132.1	107.6	99.9	96.7	92.7	82.9
64,0°	366.1	362.5	364.3	356.0	349.6	343.7	353.8	321.3	216.4	151.0	117.3	106.4	102.2	97.8	88.9
65,0°	317.4	291.4	289.3	270.1	264.4	252.1	271.8	355.7	238.4	162.6	123.2	109.7	105.4	101.0	93.7
66,0°	241.7	220.2	207.4	199.1	191.1	184.2	195.6	348.6	231.5	157.6	121.4	108.9	105.4	101.7	96.3
67,0°	175.0	157.4	148.3	141.7	137.2	131.1	138.8	316.8	193.3	134.1	110.9	102.8	101.1	98.3	95.2
68,0°	117.8	104.2	99.6	95.9	93.4	89.4	95.1	258.3	142.7	99.1	89.6	86.6	89.3	87.2	87.0
69,0°	82.1	70.5	67.8	64.9	63.7	62.0	65.3	185.3	97.0	71.2	68.1	67.2	71.2	71.7	73.1
70,0°	58.7	49.5	49.0	46.5	46.8	44.7	48.0	111.0	62.7	49.7	50.0	48.0	52.3	52.4	56.6
71,0°	45.2	40.1	39.7	39.0	38.8	38.4	38.6	60.9	42.5	38.9	38.8	38.7	39.9	40.3	42.3
72,0°	40.2	36.8	36.7	35.7	35.4	34.9	35.2	39.6	35.4	33.9	34.1	34.4	35.0	34.9	35.7

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7H75N08LA EAN: 4069025099907	LP number 59066_2319
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6
2,5°	216.9	215.6	213.9	212.7	211.1	210.0	208.2	207.3	205.6	204.8	203.2	202.6	201.1	200.6	199.2
5,0°	199.3	196.5	192.8	190.4	186.8	184.7	181.1	179.2	176.0	174.3	171.1	169.9	167.1	165.9	163.4
7,5°	182.0	177.4	172.5	168.6	164.1	160.5	156.4	153.4	149.9	147.3	144.2	142.3	139.5	138.1	135.8
10,0°	165.9	160.5	154.8	150.1	145.3	141.4	137.3	134.5	131.1	128.9	126.3	124.6	122.8	121.6	120.0
12,5°	152.1	146.7	140.8	136.6	132.2	129.1	125.7	123.6	121.2	119.7	118.1	117.3	116.2	115.7	114.9
15,0°	140.4	135.2	130.6	127.1	123.8	121.6	119.7	118.5	117.5	116.7	115.8	114.9	114.1	113.3	112.5
17,5°	131.4	127.0	123.6	121.2	119.5	118.4	117.4	116.6	115.6	114.7	113.6	112.7	111.7	110.7	109.8
20,0°	123.7	120.9	118.4	117.4	116.5	115.8	114.7	113.9	112.8	112.1	110.9	110.2	109.2	108.4	107.5
22,5°	118.1	116.4	115.2	114.3	113.3	112.5	111.6	110.8	110.0	109.3	108.4	107.8	107.1	106.5	105.8
25,0°	114.4	113.2	112.0	111.3	110.1	109.4	108.6	108.0	107.1	106.8	106.2	105.8	105.2	104.9	104.2
27,5°	111.3	110.3	109.3	108.3	107.4	106.5	105.9	105.2	104.1	103.2	102.2	101.1	99.8	97.6	93.5
30,0°	108.2	107.5	106.3	105.5	104.8	104.2	102.6	99.3	96.3	94.4	92.4	90.9	88.8	87.0	86.2
32,5°	105.1	104.4	103.5	102.8	101.7	99.5	92.6	88.5	86.7	86.2	85.5	85.3	85.1	85.3	85.3
35,0°	102.2	101.2	99.9	98.0	95.0	88.5	84.3	84.0	83.7	83.7	83.8	84.0	84.1	83.8	83.3
37,5°	99.1	96.1	91.9	88.5	84.8	82.2	81.9	82.0	82.1	82.2	82.2	81.9	81.5	81.2	80.9
40,0°	95.6	87.2	82.1	80.5	79.7	79.7	79.8	80.2	80.3	80.1	79.7	79.5	79.1	78.9	78.5
42,5°	90.5	79.2	77.1	77.0	76.9	77.3	77.6	77.8	77.7	77.7	77.5	77.5	77.3	77.2	77.1
45,0°	85.6	74.9	74.0	74.0	74.3	74.7	75.0	75.3	75.4	75.7	75.9	76.0	76.0	76.0	76.2
46,0°	83.7	73.6	72.8	73.0	73.3	73.7	73.9	74.4	74.6	75.0	75.3	75.6	75.7	75.7	76.0
47,0°	81.8	72.1	71.7	71.9	72.1	72.5	72.8	73.3	73.7	74.3	74.6	75.0	75.2	75.6	75.8
48,0°	79.9	70.8	70.5	70.8	71.0	71.4	71.9	72.4	73.0	73.6	74.1	74.6	75.0	75.3	75.9
49,0°	77.8	69.7	69.4	69.8	69.8	70.5	70.7	71.4	72.0	72.8	73.4	74.1	74.7	75.3	75.9
50,0°	75.8	68.2	68.2	68.6	68.6	69.3	69.5	70.4	71.1	71.9	72.7	73.6	74.4	75.1	75.9
51,0°	73.8	66.9	67.1	67.4	67.5	68.1	68.6	69.4	70.2	71.2	72.1	73.1	73.9	75.0	76.0
52,0°	71.7	65.6	65.9	66.2	66.3	66.8	67.5	68.4	69.2	70.2	71.3	72.5	73.7	74.7	76.2
53,0°	69.7	64.5	64.7	65.0	65.2	65.8	66.5	67.4	68.4	69.5	70.6	71.9	73.4	74.7	76.4
54,0°	67.8	63.4	63.5	63.7	64.0	64.7	65.5	66.5	67.5	68.7	70.0	71.4	73.2	74.9	76.9
55,0°	65.8	62.1	62.2	62.4	62.7	63.5	64.2	65.3	66.5	67.8	69.2	71.0	73.0	75.0	77.3
56,0°	63.9	60.9	60.9	61.1	61.5	62.3	63.1	64.3	65.5	67.1	68.6	70.5	72.8	75.3	78.2
57,0°	62.0	59.8	59.6	60.0	60.3	61.3	61.8	63.3	64.3	66.1	67.9	70.1	72.6	75.4	78.9
58,0°	60.8	58.8	58.5	58.7	59.1	60.0	60.8	62.1	63.5	65.3	67.3	69.8	72.5	75.9	79.7
59,0°	60.1	58.3	57.8	57.6	57.9	58.7	59.6	61.0	62.6	64.3	66.6	69.3	72.5	76.2	80.4
60,0°	60.7	58.9	57.8	57.1	57.1	57.6	58.4	59.8	61.4	63.5	65.9	68.9	72.4	76.5	81.2
61,0°	63.4	61.1	59.5	57.7	57.0	57.0	57.5	58.7	60.3	62.6	65.3	68.5	72.3	76.6	81.6
62,0°	68.4	65.8	63.3	60.3	58.5	57.2	57.1	57.9	59.5	61.7	64.6	68.0	72.0	76.6	81.8
63,0°	75.8	73.2	70.4	65.9	62.8	59.6	58.3	57.8	59.0	60.9	63.7	67.5	71.7	76.5	82.0
64,0°	83.7	81.1	78.3	73.2	69.2	64.2	61.4	59.5	59.7	60.9	63.3	66.8	71.2	76.2	81.5
65,0°	90.3	88.1	86.0	80.4	76.5	70.1	66.8	63.0	62.7	62.6	64.2	66.3	70.5	75.6	80.8
66,0°	93.8	92.5	90.3	86.0	81.7	76.2	72.3	68.6	67.8	67.2	67.5	66.8	69.7	74.5	79.6
67,0°	93.7	93.4	91.5	88.1	84.0	79.2	76.0	73.6	73.6	73.8	73.9	69.4	69.4	73.2	78.0
68,0°	86.4	88.2	87.5	86.2	82.7	79.6	77.3	76.9	79.8	82.3	83.4	75.7	70.4	71.5	75.7
69,0°	73.6	76.6	77.2	78.6	76.4	75.6	74.9	77.8	84.4	89.9	91.4	82.7	73.1	70.4	73.0
70,0°	56.5	61.7	62.4	66.5	65.0	67.1	67.6	74.9	85.5	94.5	94.6	86.4	76.3	69.7	69.5
71,0°	43.3	46.4	48.7	52.5	53.6	55.7	57.8	66.7	80.5	91.6	90.7	83.8	75.0	68.7	65.8
72,0°	36.3	38.0	39.6	42.3	43.9	45.8	47.4	55.3	68.1	79.7	80.4	76.2	69.1	64.5	61.1

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7H75N08LA EAN: 4069025099907	LP number 59066_2319
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	231.6	0.3	0.3
2,5°	199.0	197.7	197.6	196.3	196.2	195.2	195.4	194.4	194.6	193.9	194.4	193.7	194.2	2.7	3.1
5,0°	162.6	160.2	159.8	157.6	157.4	155.7	155.7	154.3	154.3	153.4	153.9	152.8	153.7	5.3	8.4
7,5°	134.6	132.8	132.0	130.5	129.8	128.7	128.4	127.4	127.4	126.7	126.8	126.3	126.5	7.7	16.1
10,0°	119.2	118.1	117.7	116.8	116.6	116.1	115.9	115.7	115.5	115.3	115.3	115.2	115.4	9.8	25.9
12,5°	114.6	113.9	113.6	113.1	112.9	112.4	112.3	111.9	111.9	111.6	111.7	111.5	111.6	11.7	37.6
15,0°	111.8	110.9	110.3	109.5	109.3	108.7	108.4	107.9	107.7	107.5	107.4	107.3	107.4	13.3	50.9
17,5°	108.9	108.0	107.3	106.5	106.0	105.5	105.1	104.7	104.5	104.3	104.2	103.9	103.9	14.7	65.6
20,0°	106.8	105.8	105.1	104.4	103.9	103.4	103.1	102.6	102.5	102.2	102.1	101.9	101.9	16.0	81.5
22,5°	105.1	104.5	103.9	103.0	102.1	101.3	100.9	100.6	100.7	100.6	100.8	100.6	100.8	17.3	98.8
25,0°	103.1	99.7	96.7	92.5	91.6	90.1	90.5	89.5	90.2	89.3	90.1	89.2	90.1	18.6	117.5
27,5°	89.9	87.4	86.2	85.4	84.8	84.3	83.8	83.5	83.3	83.0	82.8	82.8	82.8	20.1	137.6
30,0°	85.9	85.5	85.4	84.9	84.6	84.1	83.5	83.0	82.5	82.2	81.8	81.6	81.6	21.7	159.3
32,5°	85.2	84.7	84.1	83.3	82.5	81.8	81.3	80.5	80.3	79.8	79.7	79.4	79.4	23.4	182.7
35,0°	82.8	82.3	81.8	81.1	80.4	79.6	79.0	78.4	77.9	77.6	77.2	77.0	76.9	25.4	208.1
37,5°	80.6	80.0	79.6	79.1	78.6	78.0	77.6	77.0	76.7	76.2	75.9	75.6	75.4	27.8	235.9
40,0°	78.4	78.3	78.0	77.6	77.3	77.1	76.9	76.5	76.0	75.6	75.2	74.7	74.7	30.5	266.3
42,5°	77.0	76.9	76.9	76.8	76.9	76.9	76.9	76.8	76.4	75.9	75.3	74.7	74.6	33.2	299.5
45,0°	76.4	76.6	76.9	77.1	77.3	77.6	77.8	77.9	77.7	77.1	76.6	75.9	75.7	24.0	323.5
46,0°	76.4	76.7	77.1	77.3	77.8	78.0	78.5	78.6	78.5	78.0	77.6	77.0	76.9	14.1	337.5
47,0°	76.4	76.9	77.5	78.0	78.5	79.0	79.5	79.8	79.8	79.5	79.0	78.5	78.3	14.5	352.0
48,0°	76.4	77.1	77.8	78.6	79.5	80.2	80.8	81.0	81.1	81.0	80.5	80.3	80.2	14.9	366.9
49,0°	76.6	77.5	78.4	79.6	80.5	81.7	82.3	83.0	82.9	83.0	82.5	82.5	82.1	15.4	382.3
50,0°	76.9	77.9	79.2	80.7	82.1	83.6	84.7	85.4	85.4	85.4	85.1	85.1	84.9	15.9	398.2
51,0°	77.2	78.5	80.2	82.1	84.0	85.9	87.2	88.1	88.2	88.2	88.0	88.2	88.0	16.6	414.7
52,0°	77.7	79.5	81.7	84.2	86.6	89.0	90.7	91.8	91.6	91.6	91.6	91.9	91.8	17.3	432.1
53,0°	78.4	80.7	83.4	86.3	89.3	92.2	94.3	95.2	95.1	95.1	95.2	95.6	95.6	18.1	450.2
54,0°	79.2	82.0	85.3	88.9	92.6	95.9	97.9	98.7	98.5	98.5	98.7	99.2	99.1	18.9	469.1
55,0°	80.2	83.7	87.6	92.1	96.3	100.0	102.2	102.6	102.2	102.1	102.3	102.9	102.9	19.8	488.9
56,0°	81.4	85.3	89.9	95.2	99.8	103.9	105.8	106.2	105.2	105.1	105.4	106.1	106.2	20.7	509.7
57,0°	82.7	87.2	92.2	98.3	103.1	107.7	109.2	109.4	108.0	107.7	107.9	108.7	108.6	21.8	531.5
58,0°	84.0	88.8	94.7	101.0	106.3	110.7	112.2	111.9	110.3	109.6	109.7	110.5	110.7	23.1	554.6
59,0°	85.1	90.5	96.6	103.4	108.9	113.2	114.5	113.8	111.8	110.8	110.9	111.6	111.9	24.7	579.3
60,0°	86.2	91.9	98.4	105.2	110.9	115.1	116.0	114.8	112.6	111.3	111.3	112.0	112.1	26.6	605.9
61,0°	86.9	92.7	99.5	106.2	112.1	115.8	116.5	114.8	112.3	110.9	110.9	111.4	111.6	28.9	634.8
62,0°	87.4	93.4	99.9	106.7	112.3	115.7	116.0	114.1	111.3	109.5	109.6	110.1	110.2	31.5	666.3
63,0°	87.5	93.4	99.9	106.2	111.5	114.5	114.5	112.2	109.4	107.4	107.4	107.6	107.9	34.6	700.8
64,0°	87.0	93.0	99.2	105.1	110.1	112.5	112.2	109.7	106.8	104.7	104.5	104.8	105.0	37.2	738.0
65,0°	86.3	91.8	97.8	103.0	107.9	109.4	109.3	106.2	103.5	100.9	101.1	100.9	101.7	38.6	776.6
66,0°	84.9	89.9	95.6	100.4	104.7	106.0	105.5	102.3	99.3	96.5	96.5	96.1	97.0	38.4	815.0
67,0°	82.9	87.5	92.7	97.1	101.1	101.6	100.6	96.3	92.6	88.2	87.9	86.7	87.7	36.9	852.0
68,0°	80.3	84.3	88.9	92.2	94.8	93.1	90.9	86.7	84.1	80.5	80.2	79.6	80.2	33.8	885.8
69,0°	77.1	80.4	83.8	84.6	86.9	85.4	84.3	80.8	77.6	74.7	74.5	73.7	74.3	29.4	915.2
70,0°	73.1	74.4	77.1	78.2	79.8	78.6	77.5	71.9	69.9	65.3	65.4	63.4	64.6	23.5	938.6
71,0°	67.4	68.7	70.6	71.4	71.9	69.3	67.3	63.6	61.4	57.9	57.4	57.0	57.5	17.0	955.6
72,0°	61.8	62.6	63.5	63.4	63.5	62.4	60.1	57.0	54.0	50.6	50.0	49.2	50.1	11.7	967.4

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7H75N08LA EAN: 4069025099907	LP number 59066_2319
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
73,0°	35.2	38.4	44.0	47.9	56.3	63.4	78.3	94.3	136.6	163.2	187.0	188.9	200.9	197.3	202.2
74,0°	29.0	30.2	32.5	33.7	36.7	38.2	42.7	47.1	67.2	83.1	102.3	104.2	116.8	114.8	121.0
75,0°	25.0	25.4	26.8	27.6	29.1	29.4	31.0	31.7	38.9	45.5	55.5	56.9	63.5	63.0	66.6
76,0°	21.4	21.6	22.5	22.8	23.9	24.0	25.1	25.1	27.1	28.9	31.9	32.2	35.2	35.1	36.0
77,0°	18.6	18.6	19.3	19.2	20.1	20.2	20.9	21.1	22.2	22.6	24.0	24.1	25.4	25.3	25.9
78,0°	16.2	15.8	16.3	15.8	16.8	16.7	17.5	17.4	18.4	18.6	19.7	19.5	20.5	20.2	21.4
79,0°	13.6	13.4	13.5	13.1	13.6	13.7	14.3	14.4	15.1	15.3	16.1	16.2	16.7	16.8	17.5
80,0°	11.4	10.9	11.0	10.6	11.0	11.1	11.6	11.7	12.3	12.5	13.2	13.2	13.7	13.8	14.5
81,0°	8.8	8.2	8.4	8.2	8.4	8.5	9.0	9.1	9.6	9.8	10.3	10.3	10.8	11.1	11.6
82,0°	6.5	6.1	6.1	6.1	6.4	6.4	6.7	6.9	7.3	7.3	7.8	7.9	8.4	8.6	9.0
83,0°	4.6	4.3	4.4	4.4	4.6	4.6	5.0	5.0	5.3	5.4	5.8	5.9	6.1	6.3	6.7
84,0°	3.0	2.7	3.0	2.7	3.0	3.0	3.2	3.2	3.4	3.5	3.9	3.9	4.3	4.4	4.7
85,0°	1.9	1.9	1.9	1.9	2.0	1.9	2.0	2.0	2.2	2.2	2.5	2.5	2.7	2.7	3.0
86,0°	1.4	1.3	1.4	1.3	1.3	1.2	1.3	1.2	1.4	1.3	1.4	1.3	1.5	1.5	1.8
87,0°	1.1	1.1	1.1	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
88,0°	0.9	0.9	0.9	0.9	0.9	0.9	0.8	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
89,0°	0.9	0.9	0.9	0.9	0.9	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family
Streetlight 31 midi toolless

Order number: 5XH7H75N08LA
EAN: 4069025099907

LP number
59066_2319

siteco

C- planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
73,0°	190.7	183.9	152.7	136.4	133.9	142.5	133.0	128.1	117.1	109.9	98.2	90.8	80.7	74.3	56.2
74,0°	109.9	98.2	75.3	71.3	84.6	97.3	90.8	89.9	82.8	80.3	71.4	67.9	60.4	56.5	43.6
75,0°	55.6	48.5	42.3	44.5	56.6	64.5	60.4	60.8	56.4	55.5	49.2	46.5	42.5	41.7	35.7
76,0°	31.8	31.5	30.6	31.9	37.0	40.7	38.8	39.4	36.7	36.8	34.1	33.6	32.3	32.5	29.7
77,0°	25.2	25.7	25.5	26.0	27.6	29.3	28.3	28.9	27.8	28.1	26.8	27.4	27.2	27.6	25.7
78,0°	20.8	21.8	21.6	22.5	22.5	23.8	22.8	23.4	22.4	23.5	24.4	26.3	27.6	25.5	22.8
79,0°	17.4	18.1	18.3	18.8	18.9	19.5	19.2	19.3	19.7	22.2	26.1	30.2	30.9	26.0	21.1
80,0°	14.4	15.0	15.3	15.7	15.7	16.2	16.1	16.4	17.5	21.5	27.2	32.5	31.5	25.4	18.8
81,0°	11.6	11.8	12.1	12.5	12.5	13.0	13.0	13.2	14.4	18.4	23.7	28.5	27.2	22.0	15.6
82,0°	9.1	9.6	9.7	10.1	10.2	10.4	10.2	10.4	11.0	14.0	18.2	22.0	20.7	17.1	12.4
83,0°	6.9	7.3	7.3	7.7	7.6	7.9	7.8	8.0	8.3	10.1	12.2	14.5	13.8	12.5	9.3
84,0°	4.6	5.1	5.1	5.3	5.3	5.7	5.6	5.8	5.7	6.4	7.3	8.9	8.6	8.4	6.5
85,0°	3.1	3.3	3.2	3.5	3.5	3.7	3.7	3.9	3.8	4.3	4.4	5.1	5.1	5.0	4.0
86,0°	1.7	2.0	1.8	2.1	2.0	2.2	2.0	2.5	2.2	2.5	2.2	2.6	2.2	2.6	2.1
87,0°	0.9	0.9	0.9	1.1	1.1	1.2	1.2	1.3	1.2	1.3	1.2	1.3	1.2	1.3	1.2
88,0°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.9	0.8	0.9	0.9
89,0°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family
Streetlight 31 midi toolless

Order number: 5XH7H75N08LA
EAN: 4069025099907

LP number
59066_2319

siteco

C- planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
73,0°	36.5	33.7	33.2	32.3	32.0	31.6	31.9	31.5	31.1	30.6	30.7	31.1	31.7	31.6	31.8
74,0°	33.0	30.9	30.5	29.4	29.3	28.7	29.6	27.3	27.8	27.4	27.8	28.0	28.7	28.4	28.9
75,0°	30.2	28.1	27.6	26.1	26.1	25.4	26.3	24.1	25.0	24.6	25.0	25.2	25.5	25.4	25.9
76,0°	27.1	24.6	23.7	22.6	22.4	22.0	22.5	21.3	22.0	21.5	21.9	21.9	22.2	22.5	22.8
77,0°	24.1	21.4	20.7	19.7	19.5	19.0	19.6	18.7	19.2	18.6	18.9	19.3	19.2	19.5	20.1
78,0°	21.3	18.4	18.0	16.8	16.7	16.3	16.8	16.3	16.7	15.7	16.3	16.3	16.4	16.6	17.4
79,0°	18.6	16.1	15.3	14.4	14.1	14.0	14.4	14.5	14.5	13.1	13.4	13.5	13.5	14.1	14.5
80,0°	15.8	13.7	12.8	12.1	11.8	11.9	12.1	12.4	12.1	10.6	10.9	11.0	11.1	11.6	12.1
81,0°	12.8	11.2	10.4	9.7	9.5	9.3	9.7	9.7	9.1	7.9	8.3	8.5	8.8	9.1	9.6
82,0°	10.3	9.1	8.3	7.7	7.5	7.3	7.6	7.1	6.6	5.9	6.1	6.4	6.7	7.0	7.3
83,0°	7.9	6.9	6.3	5.7	5.6	5.4	5.7	5.0	4.4	4.3	4.5	4.6	4.8	5.1	5.3
84,0°	5.7	4.7	4.4	3.9	3.8	3.7	4.0	3.0	2.8	2.8	3.0	3.1	3.2	3.3	3.4
85,0°	3.8	3.1	2.8	2.6	2.6	2.4	2.6	1.9	1.9	1.9	2.0	2.0	2.1	2.1	2.2
86,0°	2.1	1.9	1.8	1.4	1.7	1.4	1.7	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
87,0°	1.2	1.2	0.9	0.9	0.9	0.9	0.9	0.9	1.1	1.2	1.2	1.2	1.2	1.2	1.2
88,0°	0.9	0.9	0.8	0.7	0.8	0.7	0.7	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
89,0°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7H75N08LA EAN: 4069025099907	LP number 59066_2319 siteco
--	--	---------------------------------------

C- planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
73,0°	32.4	33.6	34.6	36.5	37.7	38.8	39.5	43.3	51.1	60.7	64.6	64.9	59.5	56.5	55.0
74,0°	29.3	30.5	31.3	32.8	33.8	35.2	35.6	37.3	39.9	46.0	50.4	52.9	50.3	49.4	49.0
75,0°	26.3	27.3	28.1	29.6	30.5	31.9	32.4	33.7	34.9	37.7	40.0	42.8	42.6	43.5	43.4
76,0°	23.1	24.0	24.7	26.1	26.8	28.1	28.6	29.8	30.6	32.3	33.7	35.6	36.5	37.7	38.2
77,0°	20.1	21.2	21.9	23.1	23.7	24.7	25.2	26.3	26.8	28.5	29.7	31.2	31.8	33.2	33.2
78,0°	17.3	18.4	18.7	20.1	20.1	21.3	21.2	22.6	22.9	24.7	25.1	26.8	27.1	28.5	28.0
79,0°	14.8	15.6	16.1	16.8	16.9	17.6	18.0	19.0	19.5	20.7	21.3	22.6	22.9	23.7	23.8
80,0°	12.4	13.1	13.6	13.8	13.8	14.3	14.8	15.7	16.2	17.1	17.7	18.7	18.9	19.6	19.6
81,0°	9.8	10.3	10.5	10.8	10.9	11.2	11.5	12.2	12.5	13.2	13.7	14.5	14.7	15.4	15.3
82,0°	7.6	7.9	8.0	8.4	8.4	8.6	8.8	9.1	9.3	10.1	10.6	11.2	11.6	11.9	11.8
83,0°	5.4	5.8	5.8	6.0	6.0	6.3	6.3	6.6	6.7	7.3	7.6	8.0	8.3	8.6	8.8
84,0°	3.4	3.8	3.8	3.9	3.9	4.1	4.1	4.4	4.4	4.7	4.8	5.2	5.2	5.7	5.7
85,0°	2.2	2.4	2.4	2.5	2.5	2.6	2.5	2.7	2.6	2.8	2.8	3.2	3.1	3.4	3.3
86,0°	1.4	1.5	1.4	1.5	1.4	1.7	1.4	1.7	1.5	1.7	1.7	1.9	1.7	1.9	1.7
87,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
88,0°	0.9	0.9	0.9	0.9	0.9	0.9	1.1	1.1	0.9	1.1	1.1	0.9	0.9	0.9	0.9
89,0°	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C- planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
73,0°	55.3	55.3	56.5	56.4	56.6	53.7	51.4	47.7	44.6	42.3	41.2	41.2	41.9	7.8	975.2
74,0°	49.5	49.9	50.6	49.8	48.8	47.2	45.1	40.9	38.7	34.9	34.3	33.3	34.3	5.5	980.7
75,0°	44.6	44.5	44.7	43.5	43.0	40.6	37.0	34.1	31.5	28.9	27.7	27.1	27.9	4.0	984.7
76,0°	38.9	38.4	38.7	36.8	36.7	33.0	30.7	26.5	23.7	21.1	19.9	19.0	19.6	3.1	987.8
77,0°	33.7	33.5	32.9	32.2	29.8	27.3	24.6	20.8	18.0	15.0	13.6	12.3	12.5	2.6	990.3
78,0°	29.2	27.7	28.4	25.8	25.0	21.2	19.0	14.5	12.5	9.3	8.2	6.7	7.1	2.2	992.5
79,0°	24.0	23.3	23.3	21.3	19.6	16.7	14.1	10.8	8.0	5.7	3.9	3.0	3.1	1.8	994.3
80,0°	19.5	19.5	18.7	17.4	15.8	13.1	10.3	7.9	5.9	3.8	2.4	1.9	1.9	1.6	995.9
81,0°	15.8	15.3	14.9	13.4	11.8	9.6	7.9	5.9	4.0	2.8	1.7	1.4	1.4	1.2	997.1
82,0°	12.1	11.7	11.4	10.3	8.9	7.2	5.8	4.5	3.1	2.1	1.4	1.2	1.2	1.0	998.1
83,0°	8.8	8.6	8.4	7.6	6.6	5.3	4.4	3.3	2.4	1.4	1.2	1.2	1.2	0.7	998.8
84,0°	6.0	5.7	5.7	5.0	4.5	3.5	3.1	2.4	1.9	1.2	1.2	0.9	0.9	0.5	999.2
85,0°	3.5	3.5	3.7	3.1	2.8	2.4	2.1	1.7	1.4	1.2	0.9	0.9	0.9	0.3	999.5
86,0°	1.9	1.7	1.8	1.4	1.7	1.4	1.4	1.2	1.2	0.9	0.9	0.9	0.9	0.2	999.7
87,0°	1.2	1.2	1.2	1.2	1.1	0.9	1.1	0.9	0.9	0.9	0.9	0.9	0.9	0.1	999.8
88,0°	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.1	999.9
89,0°	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

office	industry	traffic	retail	public	sports
--------	----------	---------	--------	--------	--------

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7H75N08LA EAN: 4069025099907	LP number 59066_2319
Dimming levels table		environmental temperature: 25°C
		sit eco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	10460	86.6	90.0	88.3
95	239	252	9932	81.4	84.5	83.0
90	225	250	9429	76.5	79.5	78.0
85	210	247	8880	71.3	74.1	72.7
80	196	245	8357	66.5	69.1	67.8
75	183	242	7864	62.1	64.5	63.3
70	169	239	7324	57.3	59.5	58.4
65	156	236	6814	52.9	54.9	53.9
60	142	233	6257	48.1	50.0	49.0
55	130	229	5770	44.0	45.7	44.8
50	117	226	5235	39.8	41.2	40.5
45	104	221	4693	35.5	36.8	36.2
40	92	217	4183	31.5	32.7	32.1
35	80	212	3669	27.6	28.6	28.1
30	68	206	3148	23.8	24.6	24.2
25	56	199	2617	20.0	20.7	20.4
20	44	190	2082	16.2	16.8	16.5
16	34	180	1631	13.1	13.5	13.3

Dimming levels table		environmental temperature: 5°C
----------------------	--	--------------------------------

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	10700	87.7	91.2	89.4
95	239	252	10151	82.5	85.6	84.0
90	225	250	9629	77.5	80.5	79.0
85	211	247	9098	72.6	75.4	74.0
80	197	245	8559	67.8	70.4	69.1
75	183	242	8010	62.9	65.3	64.1
70	170	239	7495	58.4	60.7	59.6
65	157	236	6972	54.0	56.0	55.0
60	143	233	6401	49.1	51.1	50.1
55	131	230	5903	45.0	46.7	45.8
50	118	226	5357	40.6	42.2	41.4
45	105	222	4805	36.3	37.6	37.0
40	93	217	4285	32.3	33.5	32.9
35	81	212	3762	28.4	29.4	28.9
30	68	206	3189	24.2	25.0	24.6
25	57	199	2695	20.6	21.3	21.0
20	45	191	2152	16.9	17.4	17.2
15	34	180	1649	13.3	13.7	13.5

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7H75N08LA EAN: 4069025099907	LP number 59066_2319
Dimming levels table environmental temperature: 15°C		

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]start of lifetime	Power consumption [W]end of lifetime	Power consumption [W]average
100	254	254	10590	87.1	90.6	88.8
95	239	252	10050	81.9	85.0	83.4
90	225	250	9538	77.0	80.0	78.5
85	211	247	9016	72.1	74.9	73.5
80	197	245	8485	67.3	69.9	68.6
75	183	242	7944	62.5	64.9	63.7
70	169	239	7397	57.7	59.9	58.8
65	156	236	6879	53.3	55.3	54.3
60	143	233	6355	48.7	50.7	49.7
55	130	229	5820	44.4	46.0	45.2
50	117	226	5279	40.0	41.5	40.8
45	105	222	4774	36.0	37.3	36.6
40	92	217	4216	31.8	32.9	32.4
35	80	212	3697	27.8	28.8	28.3
30	68	206	3171	24.0	24.8	24.4
25	56	199	2635	20.2	20.9	20.5
20	44	190	2096	16.4	16.9	16.6
15	34	180	1641	13.2	13.6	13.4

Photometric test report

Family Streetlight 31 midi toolless	Order number: 5XH7H75N08LA EAN: 4069025099907	LP number 59066_2319
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
25.0	10460.0	86.6
5.0	10700.0	87.7
15.0	10590.0	87.1