

Photometric test report

Family
Highbay 21

Order number: 52HN11DA5LMA
EAN: 4069025445100

LP number
59724_273

serial
documentation
24.04.2025



Version primary light control with lens, PMMA, housing, white, narrow distribution

Lamps LED 5000 K | CRI ≥ 80

Controlgear ECG-DALI

Setting DC mode (central or group accumulator) initial emergency light level

Rated values Net luminous flux = 4050 lm
Power consumption = 22.3 W
Luminous efficacy = 181.6 lm/W


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 2719 cd/klm

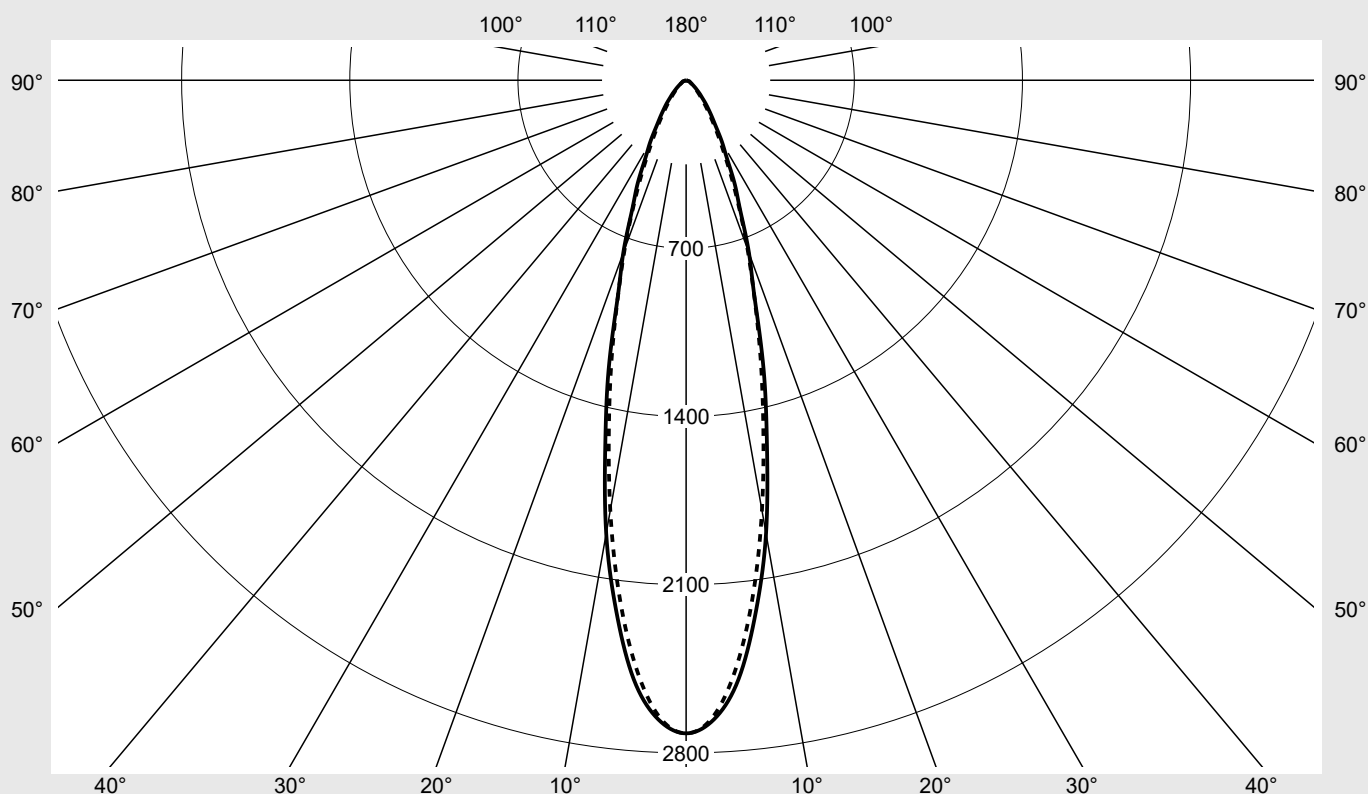

Classifications

DIN 5040 A 7 0
CIE N1=89 N2=97 N3=99
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Highbay 21	Order number: 52HN11DA5LMA EAN: 4069025445100	LP number 59724_273
Table of values for luminous intensities		Maximum luminous intensity

sitEco

C- planes	0,0° 180,0°	7,5° 172,5° 187,5° 352,5°	15,0° 165,0° 195,0° 345,0°	22,5° 157,5° 202,5° 337,5°	30,0° 150,0° 210,0° 330,0°	37,5° 142,5° 217,5° 322,5°	45,0° 135,0° 225,0° 315,0°
		Luminous intensity in cd/klm					
γ							
0,0°	2718.5	2718.5	2718.5	2718.5	2718.5	2718.5	2718.5
2,5°	2662.8	2671.1	2671.1	2670.6	2667.6	2663.3	2662.4
5,0°	2502.8	2490.9	2498.0	2494.5	2487.6	2479.1	2473.3
7,5°	2228.4	2233.8	2227.9	2223.2	2214.7	2203.4	2194.2
10,0°	1915.8	1894.8	1902.8	1897.9	1890.8	1880.8	1870.9
12,5°	1554.6	1560.7	1554.3	1552.6	1548.0	1540.2	1531.7
15,0°	1246.2	1237.0	1237.4	1238.4	1237.7	1233.9	1229.0
17,5°	947.1	964.7	959.6	960.0	960.5	959.5	958.4
20,0°	765.0	752.2	754.6	751.6	749.0	747.8	747.5
22,5°	591.2	598.6	590.3	583.2	577.5	573.8	572.1
25,0°	481.4	472.8	470.4	460.9	451.8	445.8	443.1
27,5°	370.5	376.3	371.1	363.9	355.1	347.9	344.8
30,0°	301.2	297.9	295.0	290.6	284.7	279.0	275.2
32,5°	234.8	237.8	234.9	232.8	229.2	225.3	220.4
35,0°	189.2	188.5	187.7	186.9	184.4	180.6	175.3
37,5°	154.0	153.7	151.7	151.0	148.4	144.9	141.0
40,0°	125.7	123.3	123.0	121.9	119.1	115.8	113.2
42,5°	99.2	100.3	99.3	98.6	95.9	92.9	90.7
45,0°	81.4	79.6	79.7	79.0	77.2	74.6	72.7
47,5°	64.2	64.9	64.5	64.0	62.8	60.9	59.5
50,0°	52.5	51.6	51.8	51.7	51.0	49.9	49.1
52,5°	41.7	41.9	41.8	42.1	41.9	41.4	40.9
55,0°	33.9	33.5	34.1	34.8	35.0	35.0	34.7
57,5°	27.1	27.4	28.1	29.2	29.7	29.7	29.6
60,0°	22.3	22.3	23.0	24.6	25.8	25.8	25.5
62,5°	19.0	19.2	19.6	20.7	22.4	22.3	22.0
65,0°	17.0	16.8	17.2	18.3	19.8	19.1	19.1
67,5°	14.7	14.8	14.9	16.1	17.2	16.3	16.1
70,0°	12.8	12.5	12.6	13.8	14.3	13.8	13.9
72,5°	11.3	11.1	10.9	11.6	11.4	11.2	11.7
75,0°	9.7	9.3	8.9	9.6	9.3	9.1	9.3
77,5°	7.4	7.4	7.1	7.5	7.1	6.8	7.1
80,0°	4.9	4.7	4.8	4.8	4.5	4.5	4.8
82,5°	2.2	2.3	2.3	2.4	2.4	2.5	2.7
85,0°	0.8	0.8	0.8	0.8	0.8	0.9	1.0
87,5°	0.4	0.4	0.4	0.4	0.4	0.4	0.4

Photometric test report

Family Highbay 21	Order number: 52HN11DA5LMA EAN: 4069025445100	LP number 59724_273
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	52,5° 127,5° 232,5° 307,5°	60,0° 120,0° 240,0° 300,0°	67,5° 112,5° 247,5° 292,5°	75,0° 105,0° 255,0° 285,0°	82,5° 97,5° 262,5° 277,5°	90,0° 270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm						Luminous flux in lm/klm	
0,0°	2718.5	2718.5	2718.5	2718.5	2718.5	2718.5	4.1	4.1
2,5°	2661.4	2660.0	2657.7	2657.0	2651.0	2647.2	31.8	35.9
5,0°	2468.0	2461.9	2456.3	2452.9	2444.7	2440.4	59.1	95.0
7,5°	2185.5	2176.0	2168.0	2162.0	2152.6	2148.3	78.5	173.5
10,0°	1860.3	1847.8	1837.7	1831.0	1822.1	1817.6	88.9	262.4
12,5°	1522.0	1510.4	1500.7	1495.5	1488.9	1485.2	90.6	353.0
15,0°	1223.0	1215.3	1207.9	1204.2	1200.8	1197.6	86.8	439.8
17,5°	955.3	949.4	945.6	944.9	945.8	944.0	78.6	518.5
20,0°	745.4	741.8	741.4	743.7	748.0	747.7	70.2	588.6
22,5°	571.4	571.2	573.5	575.9	579.7	580.1	60.8	649.4
25,0°	443.2	444.5	446.3	448.3	449.2	448.8	52.5	701.9
27,5°	344.0	344.5	345.1	346.1	344.9	343.6	44.7	746.7
30,0°	273.7	273.8	273.9	272.4	270.2	268.2	38.5	785.2
32,5°	217.7	217.2	215.9	213.7	211.0	209.4	32.9	818.1
35,0°	172.5	170.5	168.2	166.4	165.0	164.5	27.8	845.9
37,5°	138.1	135.6	133.3	132.0	130.7	130.3	23.7	869.5
40,0°	110.2	108.1	106.1	104.8	103.7	103.1	20.0	889.6
42,5°	88.5	86.8	85.0	83.9	83.2	82.7	16.9	906.5
45,0°	71.2	69.8	68.4	67.3	66.9	66.6	14.2	920.7
47,5°	58.5	57.3	56.0	55.1	54.8	54.6	12.1	932.8
50,0°	48.3	47.1	46.0	45.5	45.1	44.8	10.3	943.0
52,5°	40.2	39.3	38.3	37.7	37.1	36.8	8.7	951.8
55,0°	34.1	33.4	32.5	31.7	31.0	30.7	7.5	959.3
57,5°	29.3	29.0	28.2	27.0	26.3	26.1	6.6	965.9
60,0°	25.7	25.8	24.8	23.5	22.8	22.6	5.8	971.6
62,5°	22.4	22.9	21.8	20.7	20.1	19.9	5.1	976.8
65,0°	19.6	20.2	19.7	18.4	17.9	17.8	4.6	981.4
67,5°	16.7	17.6	17.8	16.4	16.0	16.0	4.1	985.5
70,0°	14.1	15.0	15.6	14.4	14.4	14.6	3.6	989.1
72,5°	11.7	12.4	13.4	12.9	13.2	13.4	3.1	992.3
75,0°	9.5	10.4	12.0	11.4	11.8	11.9	2.7	995.0
77,5°	7.2	8.1	9.6	9.6	10.0	10.2	2.1	997.1
80,0°	5.1	5.7	7.0	7.5	7.6	8.0	1.5	998.6
82,5°	3.0	3.6	4.5	5.0	5.3	5.6	0.9	999.5
85,0°	1.2	1.7	2.3	2.7	3.1	3.3	0.4	999.9
87,5°	0.4	0.4	0.5	0.6	0.8	0.9	0.1	1000.1

Photometric test report

Family Highbay 21	Order number: 52HN11DA5LMA EAN: 4069025445100	LP number 59724_273
----------------------	--	------------------------

UGR-Table		Standard room							siteco		
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	12.1	13.2	12.4	13.5	13.8	11.5	12.7	11.9	13.0	13.3
	3H	12.5	13.5	12.9	13.8	14.2	12.2	13.2	12.6	13.5	13.9
	4H	12.7	13.6	13.1	14.0	14.3	12.6	13.5	13.0	13.8	14.2
	6H	12.9	13.7	13.3	14.1	14.5	13.0	13.8	13.4	14.2	14.6
	8H	13.0	13.6	13.4	14.0	14.4	13.2	13.9	13.7	14.3	14.7
	12H	12.9	13.6	13.4	14.0	14.4	13.3	13.9	13.7	14.3	14.7
4H	2H	12.2	13.1	12.6	13.5	13.9	11.8	12.7	12.2	13.0	13.4
	3H	12.8	13.6	13.3	14.0	14.4	12.6	13.3	13.0	13.7	14.2
	4H	13.1	13.8	13.6	14.2	14.7	13.1	13.8	13.6	14.2	14.7
	6H	13.4	13.9	13.8	14.4	14.8	13.7	14.2	14.2	14.7	15.1
	8H	13.4	13.9	13.9	14.3	14.8	13.9	14.4	14.4	14.8	15.3
	12H	13.4	13.8	13.9	14.3	14.8	14.0	14.4	14.5	14.9	15.4
8H	4H	13.2	13.7	13.7	14.2	14.7	13.2	13.7	13.7	14.2	14.7
	6H	13.5	13.9	14.0	14.4	14.9	13.9	14.2	14.4	14.7	15.2
	8H	13.5	13.9	14.0	14.4	14.9	14.1	14.4	14.6	14.9	15.5
	12H	13.5	13.8	14.0	14.3	14.8	14.3	14.5	14.8	15.0	15.6
12H	4H	13.2	13.6	13.7	14.1	14.6	13.2	13.6	13.7	14.1	14.6
	6H	13.5	13.8	14.0	14.3	14.9	13.8	14.2	14.4	14.7	15.2
	8H	13.5	13.8	14.1	14.3	14.9	14.1	14.4	14.6	14.9	15.4

Luminance table		Max. for $\gamma \geq 65^\circ$									Photometric dimensions in mm:	L = 426 B = 264
C- planes	0,0° 180,0°	10,0° 170,0° 190,0° 350,0°	20,0° 160,0° 200,0° 340,0°	30,0° 150,0° 210,0° 330,0°	40,0° 140,0° 220,0° 320,0°	50,0° 130,0° 230,0° 310,0°	60,0° 120,0° 240,0° 300,0°	70,0° 110,0° 250,0° 290,0°	80,0° 100,0° 260,0° 280,0°	90,0° 270,0°		
γ	Luminance in cd/m²											
45,0°	4145.1	4046.6	4041.2	3932.2	3763.0	3650.8	3556.8	3462.3	3413.3	3390.7		
50,0°	2938.5	2889.4	2902.1	2856.7	2779.8	2725.6	2639.1	2563.7	2532.3	2508.1		
55,0°	2128.6	2108.3	2172.4	2200.5	2190.7	2152.2	2098.7	2024.1	1955.8	1930.1		
60,0°	1608.2	1618.4	1734.6	1861.6	1849.9	1846.4	1859.2	1760.1	1656.1	1629.4		
65,0°	1451.8	1439.7	1521.4	1683.3	1623.0	1651.7	1722.4	1649.4	1538.7	1520.4		
70,0°	1346.5	1317.2	1422.5	1502.5	1449.0	1468.0	1580.3	1620.0	1513.6	1534.6		
75,0°	1345.9	1273.7	1319.5	1295.4	1264.4	1307.7	1441.6	1681.5	1631.6	1657.1		
80,0°	1016.0	977.4	1005.0	942.1	950.7	1021.3	1189.3	1508.4	1558.9	1651.2		
85,0°	333.9	325.3	332.6	337.6	373.3	452.9	692.5	998.3	1230.1	1370.5		

Photometric test report

Family
Highbay 21

Order number: 52HN11DA5LMA
EAN: 4069025445100

LP number
59724_273

Luminance values in cd/m²

γ 65°

γ 70°

γ 75°

γ 80°

γ 85°

siteco

