

Photometric test report

Family
Monsun® 12

Order number: **51FP20TP960X**
EAN: **4058352392416**

LP number
59060_33



Version prismatic diffuser, opal, polycarbonate, wide distribution

Lamps LED 2700 K ... 6500 K | CRI ≥ 80

Controlgear ECG-DALI

Setting factory setting


Rated values at 4000 K
Net luminous flux = 5420 lm
Power consumption = 37.4 W
Luminous efficacy = 144.9 lm/W

serial
documentation
26.08.2020

sitEco

Luminous intensity in cd/klm **C180-0** **C270-90**

Imax: 319 cd/klm

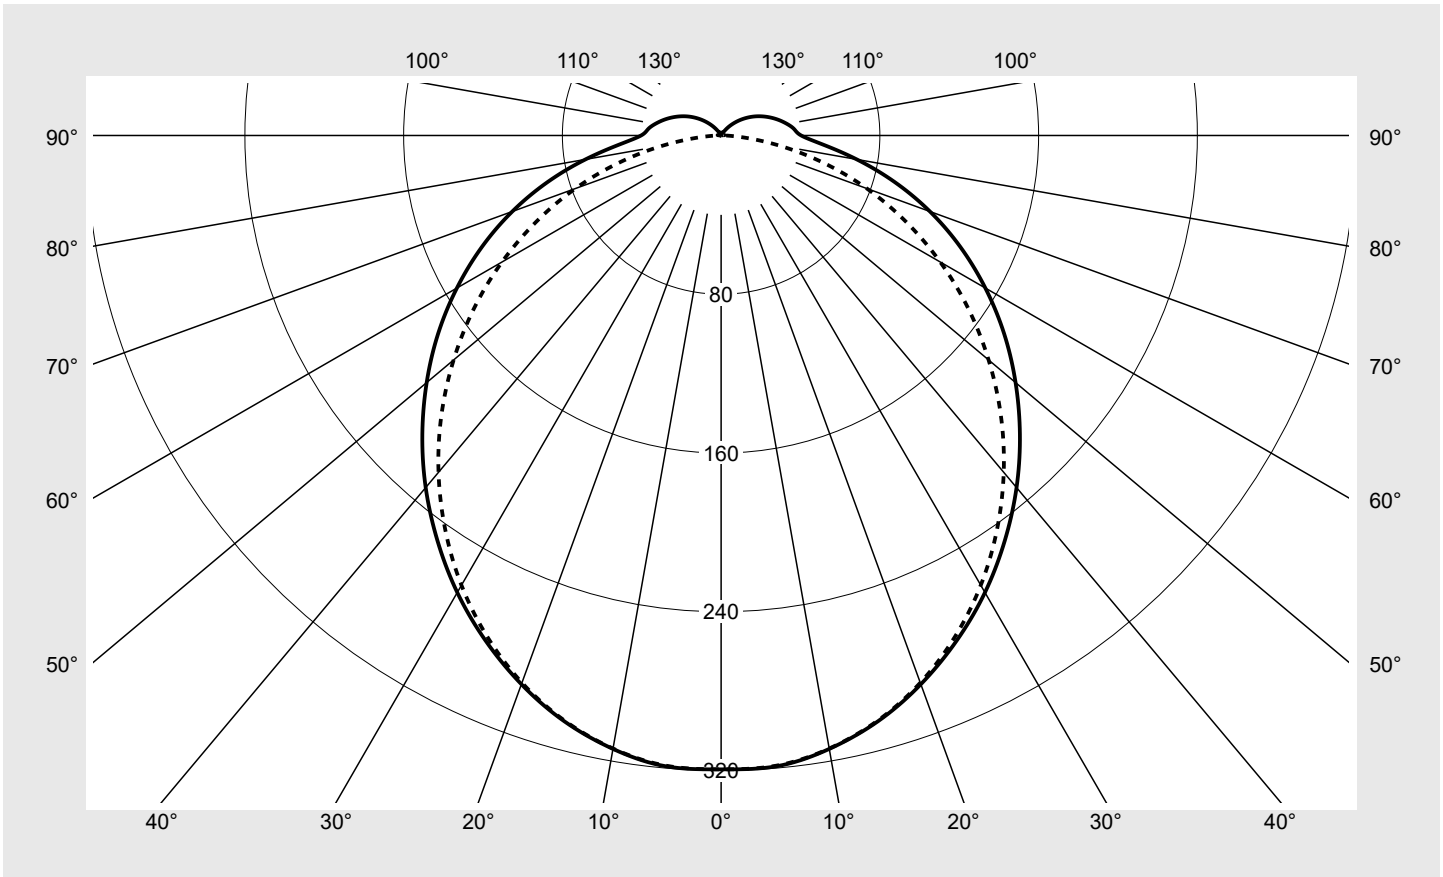

Classifications

DIN 5040 A 4 1
CIE N1=45 N2=75 N3=93
N4=94 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 93.7%
 ϕ_o 6.3%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Monsun® 12	Order number: 51FP20TP960X EAN: 4058352392416	LP number 59060_33
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	319.4	319.4	319.4	319.4	319.4	319.4	319.4	1.9	1.9
5°	319.1	317.8	316.0	317.2	318.6	318.6	318.8	15.2	17.1
10°	313.9	312.8	311.0	312.1	313.5	313.5	313.7	29.8	46.9
15°	305.6	304.7	302.7	303.7	305.0	304.9	305.2	43.2	90.1
20°	294.3	293.5	291.4	292.2	293.3	293.1	293.5	54.9	145.0
25°	280.9	280.2	277.7	277.9	278.8	278.5	278.8	64.6	209.6
30°	265.9	265.3	262.4	261.6	261.9	261.4	261.7	72.0	281.6
35°	249.2	248.5	245.6	243.7	242.9	242.2	242.4	77.0	358.5
40°	231.6	230.8	227.5	224.6	222.7	221.4	221.6	79.5	438.0
45°	212.9	211.8	208.5	204.2	201.3	199.0	199.4	79.5	517.5
50°	193.7	192.3	188.8	183.7	179.4	175.9	176.0	77.3	594.9
55°	174.1	172.4	168.8	162.7	157.2	152.3	152.1	73.1	667.9
60°	153.8	152.1	148.1	141.4	134.9	128.8	127.5	66.9	734.9
65°	133.1	131.4	127.0	119.9	112.8	105.5	102.8	59.2	794.0
70°	112.0	110.4	105.0	98.0	90.2	82.2	78.2	49.9	843.9
75°	90.5	88.8	83.0	75.7	67.3	58.8	53.6	39.3	883.2
80°	69.4	67.4	62.0	54.0	45.3	36.4	30.4	28.3	911.6
85°	51.2	49.1	43.8	35.9	26.7	17.7	11.3	18.6	930.2
90°	40.3	38.3	33.0	25.3	16.4	7.5	1.9	12.9	943.1
95°	36.9	35.1	30.2	22.8	14.1	5.6	1.6	11.6	954.7
100°	33.7	31.9	27.1	20.1	11.9	4.0	1.5	10.1	964.8
105°	30.1	28.5	23.8	17.3	9.5	2.6	1.3	8.6	973.4
110°	26.5	24.6	20.5	14.4	7.3	1.5	1.2	7.1	980.4
115°	22.8	21.1	17.3	11.6	5.2	1.3	1.2	5.7	986.1
120°	19.1	17.5	14.1	8.9	3.4	1.3	1.1	4.4	990.5
125°	15.4	13.9	10.8	6.2	1.7	1.2	1.0	3.2	993.6
130°	11.8	10.5	7.7	3.9	1.4	1.2	1.0	2.2	995.8
135°	8.3	7.2	5.0	2.0	1.4	1.2	1.1	1.4	997.2
140°	5.1	4.3	2.5	1.6	1.3	1.1	1.0	0.8	998.0
145°	2.4	2.0	1.8	1.6	1.4	1.2	1.2	0.5	998.5
150°	1.9	1.9	1.8	1.5	1.4	1.3	1.2	0.4	999.0
155°	1.8	1.8	1.6	1.5	1.4	1.3	1.3	0.4	999.3
160°	1.6	1.6	1.5	1.5	1.4	1.4	1.3	0.3	999.6
165°	1.5	1.5	1.4	1.4	1.4	1.4	1.3	0.2	999.8
170°	1.4	1.4	1.4	1.4	1.4	1.4	1.3	0.1	999.9
175°	1.3	1.3	1.3	1.4	1.4	1.4	1.3	0.1	1000.0
180°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.0	1000.0

Photometric test report

Family Monsun® 12	Order number: 51FP20TP960X EAN: 4058352392416	LP number 59060_33
-----------------------------	--	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	20.0	21.7	20.3	22.0	22.3	19.8	21.5	20.1	21.8	22.1
	3H	21.8	23.4	22.2	23.7	24.0	21.3	22.9	21.7	23.2	23.6
	4H	22.6	24.1	23.0	24.4	24.8	21.9	23.4	22.3	23.8	24.2
	6H	23.3	24.7	23.7	25.1	25.5	22.4	23.8	22.8	24.1	24.5
	8H	23.7	25.0	24.1	25.3	25.7	22.5	23.8	22.9	24.2	24.6
	12H	24.0	25.2	24.4	25.6	26.0	22.6	23.8	23.0	24.2	24.6
4H	2H	20.7	22.2	21.1	22.5	22.9	20.6	22.0	21.0	22.4	22.8
	3H	22.7	24.0	23.1	24.4	24.8	22.3	23.6	22.7	24.0	24.4
	4H	23.7	24.8	24.1	25.2	25.7	23.0	24.2	23.5	24.6	25.0
	6H	24.5	25.6	25.0	26.0	26.4	23.6	24.6	24.0	25.0	25.5
	8H	24.9	25.9	25.4	26.3	26.8	23.8	24.7	24.2	25.1	25.6
	12H	25.3	26.1	25.8	26.6	27.1	23.9	24.7	24.3	25.2	25.7
8H	4H	24.0	25.0	24.5	25.4	25.9	23.5	24.4	23.9	24.8	25.3
	6H	25.1	25.8	25.5	26.3	26.8	24.2	24.9	24.6	25.4	25.9
	8H	25.5	26.3	26.0	26.7	27.2	24.4	25.1	24.9	25.6	26.1
	12H	26.0	26.6	26.6	27.1	27.7	24.6	25.2	25.1	25.7	26.2
12H	4H	24.1	24.9	24.5	25.4	25.9	23.6	24.4	24.1	24.9	25.3
	6H	25.1	25.8	25.6	26.3	26.8	24.3	25.0	24.8	25.5	26.0
	8H	25.7	26.3	26.2	26.8	27.3	24.6	25.2	25.1	25.7	26.2

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1590	H(C0) = 21	H(C180) = 21
			B = 87	H(C90) = 21	H(C270) = 21

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°	45°	9505.4	9492.3	9502.9	9590.3	9850.2	10254.7	10902.8	
50°	50°	9170.1	9143.2	9157.6	9220.8	9448.4	9838.5	10560.1	
55°	55°	8844.5	8801.2	8814.3	8840.7	9033.7	9394.3	10196.4	
60°	60°	8496.5	8453.6	8450.1	8449.1	8604.0	8928.3	9768.6	
65°	65°	8130.6	8085.1	8048.0	8022.6	8146.9	8418.3	9263.8	
70°	70°	7714.3	7664.0	7556.9	7510.5	7579.8	7799.5	8642.0	
75°	75°	7205.8	7141.6	6964.0	6855.9	6823.9	6951.6	7738.9	
80°	80°	6612.7	6496.0	6295.8	6024.3	5839.2	5758.1	6391.3	
85°	85°	6128.7	5964.7	5683.8	5273.5	4774.4	4266.9	4420.7	

Photometric test report

Family Monsun® 12	Order number: 51FP20TP960X EAN: 4058352392416	LP number 59060_33
------------------------------------	--	-------------------------------------

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

siteco

