

Photometric test report

Family
Monsun® 12

Order number: **51FP30MP480H**
EAN: **4058352389362**

LP number
59013_5



Version prismatic diffuser, opal, PA, wide distribution
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG Multilumen
Rated values Net luminous flux = 7640 lm
Power consumption = 45.4 W
Luminous efficacy = 168.3 lm/W

serial
documentation
08.04.2020


sitEco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 350 cd/klm

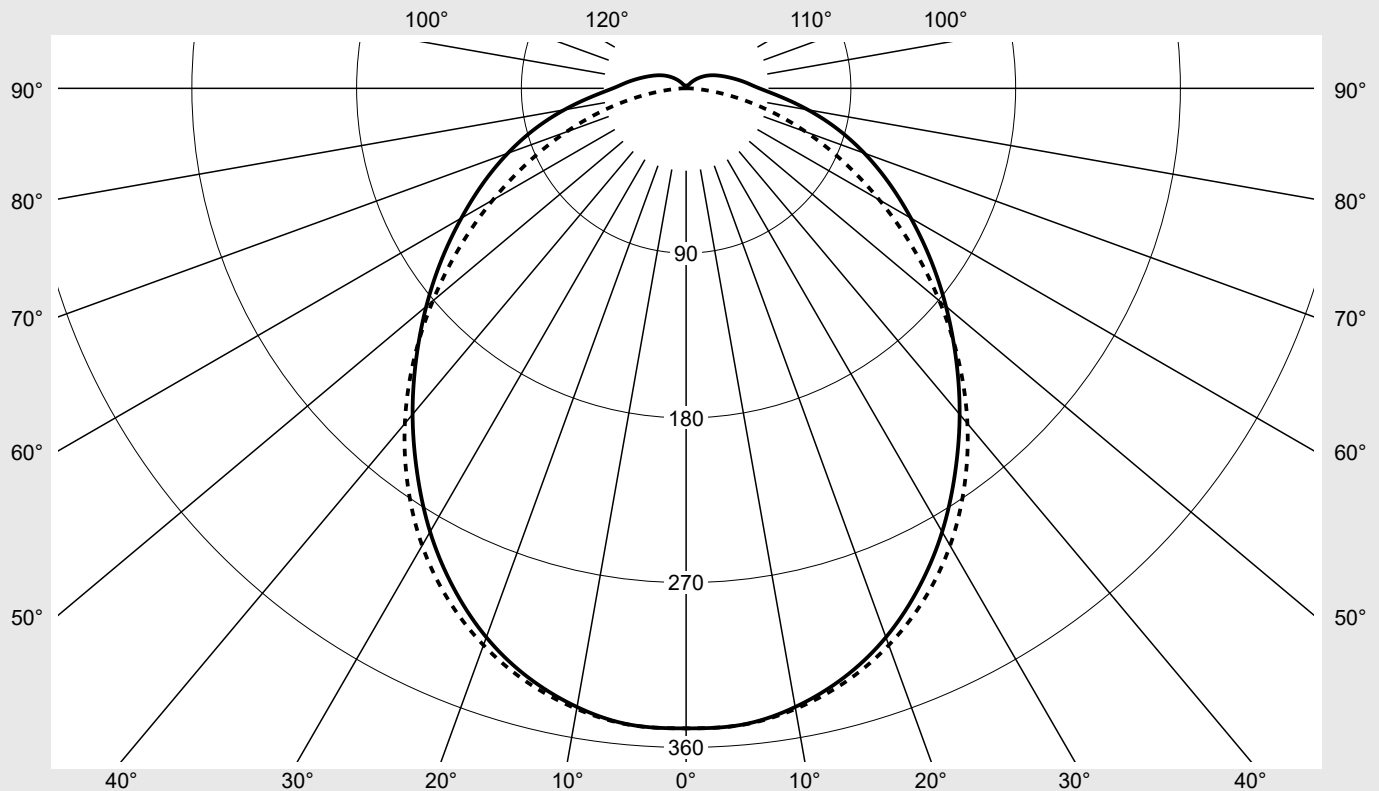

Classifications

DIN 5040 A 4 1
CIE N1=48 N2=77 N3=93
N4=95 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 94.6%
 ϕ_o 5.4%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Monsun® 12	Order number: 51FP30MP480H EAN: 4058352389362	LP number 59013_5
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	349.6	349.6	349.6	349.6	349.6	349.6	349.6	2.1	2.1
5°	349.0	348.0	345.9	347.3	348.9	348.8	349.1	16.6	18.7
10°	343.1	342.7	340.7	342.3	343.9	344.0	344.2	32.6	51.4
15°	333.2	333.4	331.6	333.4	335.2	335.4	335.8	47.4	98.7
20°	319.1	319.9	318.4	320.5	322.7	323.2	323.7	60.2	158.9
25°	300.9	302.3	301.1	303.5	306.2	307.2	307.9	70.4	229.4
30°	279.7	281.4	280.3	282.7	285.9	287.4	288.4	77.7	307.1
35°	256.2	258.1	257.1	258.9	262.0	263.8	265.1	81.8	388.9
40°	232.4	233.8	232.7	233.2	235.7	237.7	239.0	82.7	471.6
45°	208.5	209.2	207.5	206.2	207.4	208.7	210.5	80.7	552.2
50°	185.3	185.4	183.1	180.1	179.1	179.0	180.6	76.3	628.5
55°	163.0	162.4	159.5	154.8	151.6	149.7	150.8	70.0	698.5
60°	141.8	140.8	136.8	130.7	125.6	121.9	121.9	62.3	760.8
65°	122.2	120.9	115.6	108.1	101.6	96.2	94.8	53.9	814.7
70°	103.6	102.2	95.5	87.0	79.2	72.5	69.8	44.9	859.6
75°	85.5	83.7	76.7	67.5	58.3	50.8	46.8	35.6	895.2
80°	67.6	65.6	59.5	49.4	39.4	31.1	26.3	26.3	921.4
85°	51.6	49.7	44.2	34.8	24.1	15.2	9.9	18.1	939.5
90°	40.0	38.5	33.8	25.4	15.4	6.7	1.8	12.9	952.4
95°	33.4	32.2	28.6	21.7	12.9	4.9	1.6	10.7	963.1
100°	28.1	27.1	23.9	18.1	10.6	3.5	1.4	8.8	971.9
105°	23.6	22.7	19.8	14.8	8.2	2.2	1.2	7.1	979.0
110°	20.0	18.9	16.3	11.8	6.0	1.3	1.1	5.6	984.5
115°	16.9	15.8	13.4	9.2	4.2	1.2	1.1	4.4	988.9
120°	14.0	13.0	10.7	6.9	2.6	1.1	1.0	3.3	992.2
125°	11.3	10.3	8.1	4.8	1.5	1.1	0.9	2.4	994.6
130°	8.7	7.8	5.8	3.1	1.3	1.0	1.0	1.7	996.2
135°	6.2	5.5	3.8	1.8	1.4	1.0	1.0	1.1	997.4
140°	4.0	3.4	2.2	1.6	1.4	1.1	1.1	0.7	998.1
145°	2.3	2.0	1.8	1.6	1.4	1.2	1.2	0.5	998.6
150°	1.9	1.9	1.8	1.6	1.3	1.2	1.2	0.4	999.0
155°	1.8	1.8	1.6	1.5	1.3	1.3	1.3	0.3	999.3
160°	1.6	1.6	1.5	1.3	1.3	1.3	1.3	0.3	999.6
165°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.2	999.8
170°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.1	999.9
175°	1.3	1.3	1.3	1.3	1.4	1.4	1.4	0.1	1000.0
180°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.0	1000.0

Photometric test report

Family Monsun® 12	Order number: 51FP30MP480H EAN: 4058352389362	LP number 59013_5
-----------------------------	--	-----------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	20.8	22.5	21.2	22.8	23.1	20.8	22.5	21.2	22.8	23.2
	3H	22.5	24.1	22.9	24.4	24.8	22.2	23.7	22.6	24.0	24.4
	4H	23.4	24.8	23.8	25.2	25.5	22.7	24.1	23.1	24.5	24.9
	6H	24.1	25.5	24.5	25.8	26.2	23.0	24.4	23.4	24.8	25.1
	8H	24.5	25.7	24.9	26.1	26.5	23.2	24.4	23.6	24.8	25.2
	12H	24.8	26.0	25.2	26.4	26.8	23.2	24.4	23.7	24.8	25.2
4H	2H	21.5	22.9	21.9	23.3	23.7	21.5	22.9	21.9	23.3	23.7
	3H	23.4	24.7	23.8	25.0	25.5	23.0	24.3	23.5	24.7	25.1
	4H	24.4	25.5	24.8	25.9	26.3	23.7	24.8	24.1	25.2	25.6
	6H	25.3	26.3	25.8	26.7	27.2	24.1	25.1	24.6	25.5	26.0
	8H	25.7	26.6	26.2	27.1	27.5	24.3	25.2	24.7	25.6	26.1
	12H	26.2	27.0	26.6	27.4	27.9	24.4	25.2	24.9	25.7	26.1
8H	4H	24.7	25.6	25.2	26.1	26.5	24.1	25.0	24.5	25.4	25.9
	6H	25.8	26.6	26.3	27.0	27.5	24.7	25.4	25.2	25.9	26.4
	8H	26.3	27.0	26.8	27.5	28.0	24.9	25.6	25.4	26.0	26.6
	12H	26.9	27.5	27.4	28.0	28.5	25.0	25.6	25.5	26.1	26.7
12H	4H	24.7	25.6	25.2	26.0	26.5	24.2	25.0	24.6	25.4	25.9
	6H	25.9	26.6	26.4	27.0	27.5	24.8	25.5	25.3	26.0	26.5
	8H	26.5	27.1	27.0	27.6	28.1	25.1	25.7	25.6	26.2	26.7

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1590	H(C0) = 21	H(C180) = 21
			B = 87	H(C90) = 21	H(C270) = 21

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°	13115.9	13213.8	13332.5	13650.5	14309.9	15162.1	16229.8		
50°	12364.2	12423.4	12517.7	12741.0	13294.3	14112.2	15277.3		
55°	11673.4	11690.6	11743.5	11854.8	12282.0	13015.3	14250.7		
60°	11042.4	11030.8	10999.5	11006.9	11293.4	11915.3	13160.3		
65°	10524.7	10480.8	10330.1	10196.8	10344.5	10829.9	12045.8		
70°	10062.0	10000.1	9679.5	9401.9	9384.0	9704.4	10870.2		
75°	9594.6	9489.9	9065.3	8613.5	8338.7	8459.6	9520.9		
80°	9073.2	8915.8	8509.5	7776.8	7165.4	6926.5	7776.1		
85°	8693.3	8510.3	8086.1	7207.1	6074.1	5179.2	5477.2		


Photometric test report

Family Monsun® 12	Order number: 51FP30MP480H EAN: 4058352389362	LP number 59013_5
------------------------------------	--	------------------------------------



Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

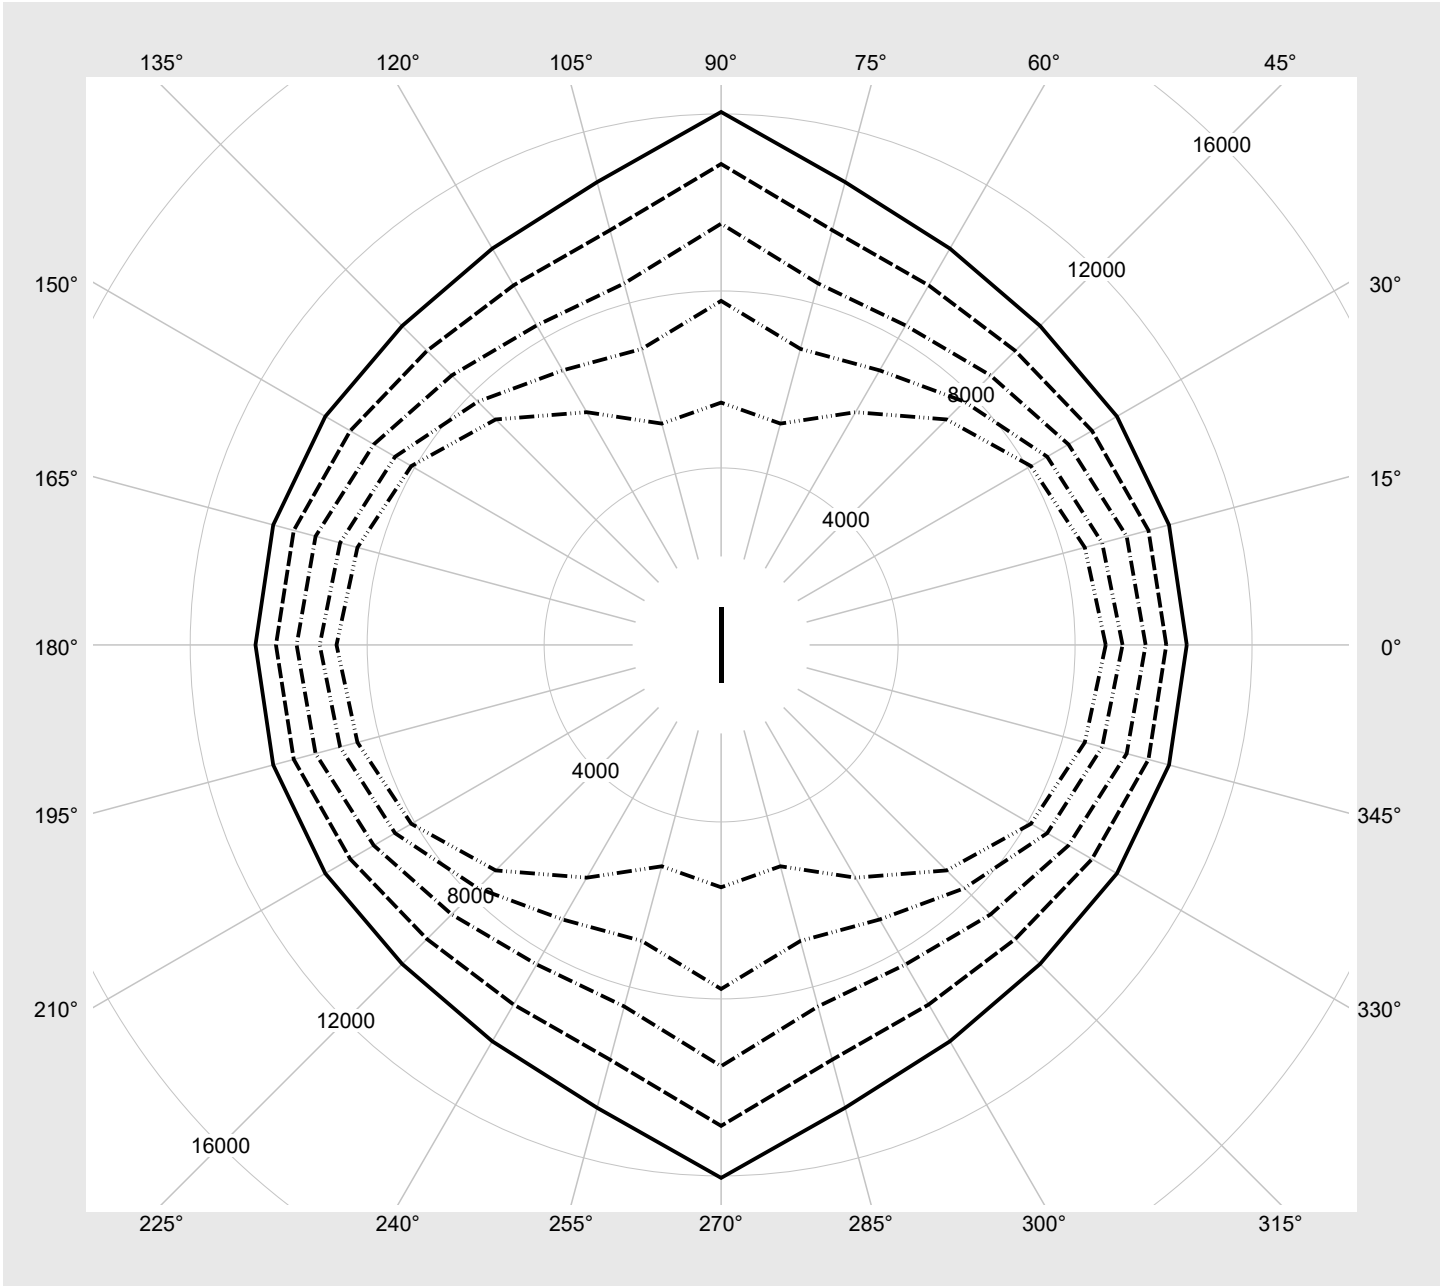

Photometric test report

Family
Monsun® 12

Order number: 51FP30MP480H
EAN: 4058352389362

LP number
59013_5

Multilumen Table

environmental temperature: 25°C

siteco

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
1	A	C	E	7640	45.4
2	A	C	F	7100	41.9
3	A	D	E	6480	38.0
4	A	D	F	5920	34.6
5	B	C	E	5350	31.2
6	B	C	F	4780	27.8
7	B	D	E	4190	24.5
8	B	D	F	3900	22.9