




# Photometric test report

<b>Family</b> <b>Licross® 11 Recessed</b>	<b>Order number: 51TL14DN485FD</b> <b>EAN: 4058352418239</b>	<b>LP number</b> <b>58683_18</b>
	<b>Version</b> cover frosted, asymmetric distribution <b>Lamps</b> LED 4000 K   CRI ≥ 80 <b>Controlgear</b> ECG-DALI <b>Setting</b> DC mode (central or group accumulator) initial emergency light level <b>Rated values</b> Net luminous flux = 1360 lm Power consumption = 9.8 W Luminous efficacy = 138.8 lm/W	<b>serial documentation</b> <b>26.08.2020</b>  

**Luminous intensity in cd/klm** C180-0 C270-90 **Imax: 681 cd/klm**

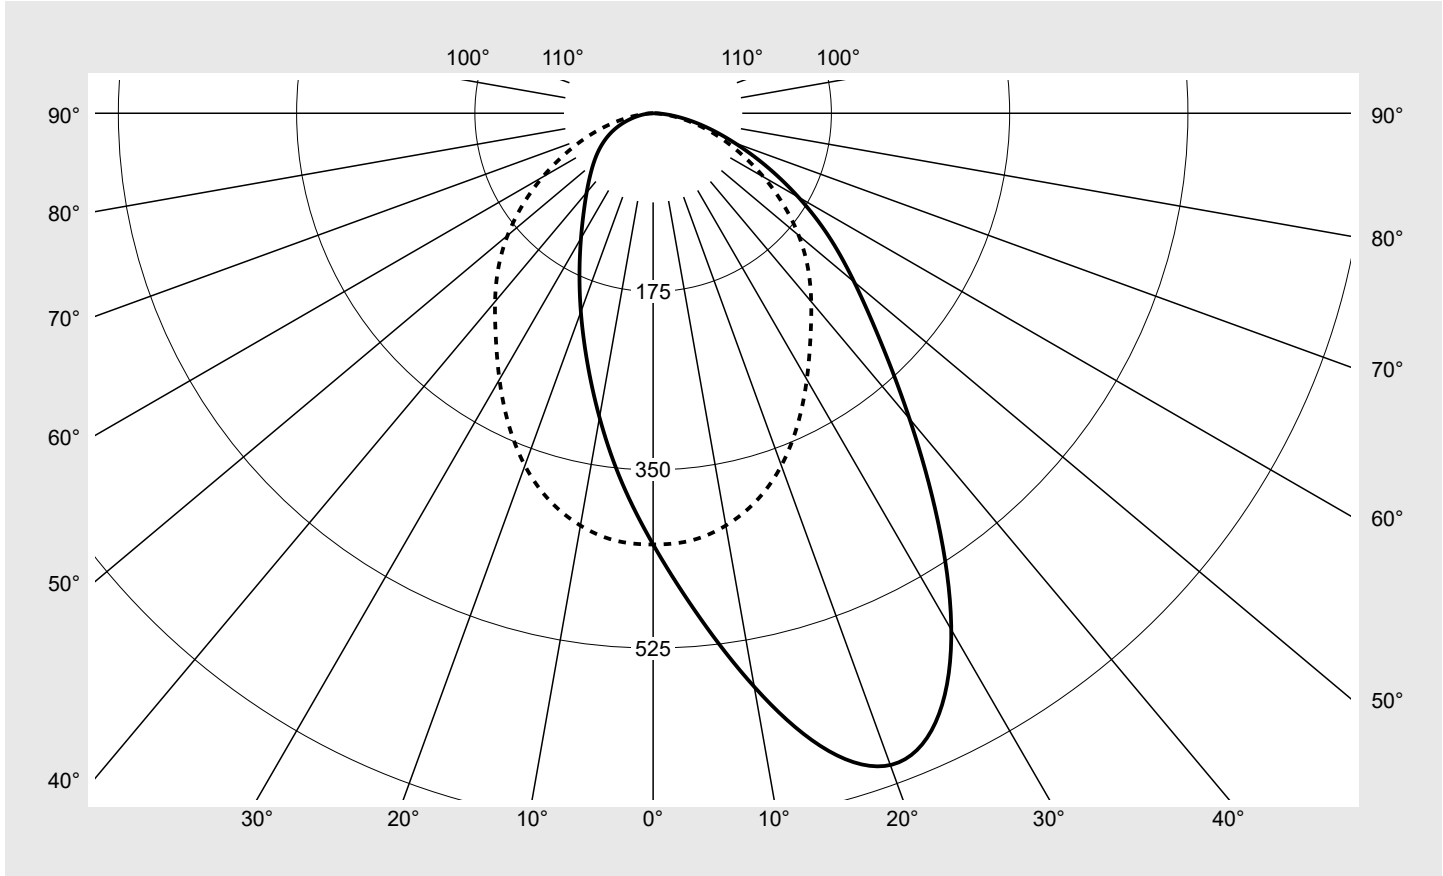

Classifications	
DIN 5040	A 4 0
CIE	N1=56 N2=84 N3=97 N4=100 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	100.0%
$\phi_o$	0.0%

**Measurement conditions**  
DIN EN 13032 and DIN 5032

## Photometric test report

<b>Family</b> <b>Licross® 11 Recessed</b>	<b>Order number: 51TL14DN485FD</b> <b>EAN: 4058352418239</b>	<b>LP number</b> <b>58683_18</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>sITeco</b>

C-planes	0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°
$\gamma$	Luminous intensity in cd/klm						
0°	423.3	423.3	423.3	423.3	423.3	423.3	423.3
5°	492.9	491.4	480.7	469.8	456.1	438.7	421.2
10°	571.7	566.6	544.9	518.0	484.6	447.0	411.0
15°	644.7	637.1	605.9	562.5	507.2	447.4	393.4
20°	680.9	674.8	644.8	594.0	519.7	438.2	368.1
25°	657.9	657.6	642.1	600.0	518.2	419.3	336.2
30°	585.4	591.2	594.0	574.0	501.7	394.4	301.7
35°	486.6	496.5	513.6	518.9	472.6	367.8	269.2
40°	391.6	400.9	423.7	447.6	435.3	342.4	241.4
45°	315.0	320.7	340.1	373.0	389.0	312.9	214.9
50°	257.7	259.4	273.6	305.9	334.9	275.1	186.5
55°	210.4	209.0	219.8	247.0	276.4	230.5	156.0
60°	164.7	163.2	172.4	194.6	218.3	183.7	125.4
65°	122.2	121.6	130.0	147.7	165.1	139.3	96.1
70°	85.2	85.7	92.4	106.6	118.3	100.1	70.2
75°	55.7	56.1	61.0	71.1	77.9	65.9	46.5
80°	31.6	31.9	35.4	40.3	43.4	36.3	25.7
85°	13.1	12.9	14.6	16.5	16.2	13.2	9.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm						Luminous flux in lm/klm	
0°	423.3	423.3	423.3	423.3	423.3	423.3	2.5	2.5
5°	404.2	389.5	375.7	365.6	362.1	361.8	20.2	22.8
10°	378.5	351.6	328.9	312.6	305.3	303.2	40.3	63.1
15°	347.6	311.7	283.3	263.5	254.2	251.1	59.8	123.0
20°	312.8	271.7	241.2	220.7	211.0	207.4	77.2	200.1
25°	275.0	232.7	202.9	183.7	174.4	171.0	89.9	290.0
30°	237.7	196.9	169.7	152.6	144.6	141.7	96.4	386.5
35°	204.1	165.0	141.0	127.0	121.0	118.9	96.9	483.4
40°	176.0	138.8	117.2	106.8	102.8	101.6	93.4	576.7
45°	151.3	116.9	98.0	90.5	88.3	87.8	87.1	663.9
50°	128.6	98.3	82.7	77.4	76.2	76.3	79.3	743.1
55°	107.1	82.4	69.7	65.9	65.5	66.0	69.9	813.0
60°	87.0	68.0	58.3	55.3	55.4	56.0	59.0	872.0
65°	68.6	55.0	47.7	45.3	45.4	45.9	47.4	919.5
70°	51.6	42.4	37.2	35.1	35.2	35.4	35.8	955.3
75°	35.3	29.8	26.5	24.5	24.4	24.5	24.7	980.0
80°	20.2	17.6	15.6	14.5	14.4	14.5	14.3	994.3
85°	7.8	7.1	6.7	6.2	6.2	6.3	5.7	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Licross® 11 Recessed	<b>Order number: 51TL14DN485FD</b> <b>EAN: 4058352418239</b>	<b>LP number</b> 58683_18
---------------------------------------	---	------------------------------

siteco

UGR-Table		Standard room									
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	19.5	21.1	19.8	21.4	21.7	18.1	19.7	18.4	20.0	20.3
	3H	20.4	21.9	20.8	22.2	22.6	19.2	20.6	19.6	21.0	21.3
	4H	20.8	22.1	21.2	22.5	22.9	19.6	20.9	20.0	21.3	21.7
	6H	21.0	22.3	21.5	22.7	23.0	19.9	21.1	20.3	21.5	21.9
	8H	21.1	22.3	21.6	22.7	23.1	19.9	21.1	20.4	21.5	21.9
	12H	21.2	22.3	21.6	22.7	23.1	20.0	21.1	20.5	21.5	21.9
4H	2H	20.2	21.6	20.6	21.9	22.3	18.7	20.0	19.1	20.4	20.8
	3H	21.3	22.5	21.8	22.9	23.3	20.1	21.2	20.5	21.6	22.0
	4H	21.8	22.8	22.2	23.2	23.6	20.6	21.7	21.1	22.1	22.5
	6H	22.1	23.0	22.6	23.4	23.9	21.0	21.9	21.5	22.3	22.8
	8H	22.2	23.0	22.7	23.5	24.0	21.1	21.9	21.6	22.4	22.8
	12H	22.3	23.0	22.8	23.5	24.0	21.2	21.9	21.7	22.4	22.9
8H	4H	22.1	22.9	22.6	23.4	23.8	20.9	21.7	21.3	22.1	22.6
	6H	22.5	23.2	23.0	23.7	24.2	21.4	22.0	21.9	22.5	23.0
	8H	22.7	23.3	23.2	23.8	24.3	21.5	22.1	22.0	22.6	23.1
	12H	22.8	23.3	23.3	23.8	24.4	21.7	22.2	22.2	22.7	23.2
12H	4H	22.2	22.9	22.7	23.3	23.8	20.9	21.6	21.4	22.1	22.6
	6H	22.6	23.2	23.1	23.7	24.2	21.4	22.0	21.9	22.5	23.0
	8H	22.8	23.3	23.3	23.8	24.3	21.6	22.1	22.1	22.6	23.2

Luminance table		Max. for $\gamma \geq 65^\circ$											
		Photometric dimensions in mm: L = 1500 B = 58											
C-planes	0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°
$\gamma$	Luminance in cd/m <sup>2</sup>												
45°	6963.0	7088.8	7519.4	8246.5	8598.8	6918.2	4751.0	3345.8	2583.9	2165.5	2001.4	1952.6	1940.1
50°	6266.2	6307.7	6653.8	7438.2	8145.7	6689.2	4535.8	3128.5	2391.6	2010.3	1881.2	1854.0	1855.9
55°	5733.0	5696.8	5989.8	6731.0	7534.2	6281.1	4250.6	2919.9	2245.1	1899.5	1796.8	1785.4	1799.9
60°	5149.0	5103.5	5390.2	6084.2	6825.7	5742.2	3919.1	2719.0	2125.2	1821.5	1730.4	1731.0	1751.9
65°	4519.7	4496.3	4807.4	5462.4	6105.8	5151.3	3555.4	2537.1	2036.0	1763.4	1676.4	1679.0	1699.3
70°	3893.1	3918.9	4224.1	4873.7	5405.5	4575.9	3208.3	2357.6	1937.0	1701.8	1602.0	1608.4	1615.9
75°	3365.3	3388.3	3682.0	4293.2	4704.6	3981.5	2811.0	2132.7	1802.6	1597.9	1477.2	1473.7	1477.5
80°	2849.0	2874.0	3184.4	3630.8	3902.9	3266.9	2316.1	1819.6	1585.1	1402.9	1308.9	1299.8	1307.2
85°	2348.2	2322.0	2611.3	2952.8	2902.9	2362.9	1638.1	1401.0	1278.5	1193.3	1120.8	1115.1	1125.3

**Photometric test report**

<b>Family</b> <b>Licross® 11 Recessed</b>	<b>Order number: 51TL14DN485FD</b> <b>EAN: 4058352418239</b>	<b>LP number</b> <b>58683_18</b>
--	---	-------------------------------------

**Luminance values in cd/m<sup>2</sup>**     γ 65°   γ 70°   γ 75°   γ 80°   γ 85°     **siteco**

