

Photometric test report

Family
Licross® 11 Recessed

Order number: 51TL19CN48XFD
EAN: 4058352418338

LP number
58532_28



Version cover frosted, double asymmetric distribution
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG-Multilumen CLOi
Setting DC mode (central or group accumulator) initial emergency light level
Rated values Net luminous flux = 3280 lm
 Power consumption = 22.1 W
 Luminous efficacy = 148.4 lm/W

serial
documentation
26.08.2020


sitEco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 703 cd/klm

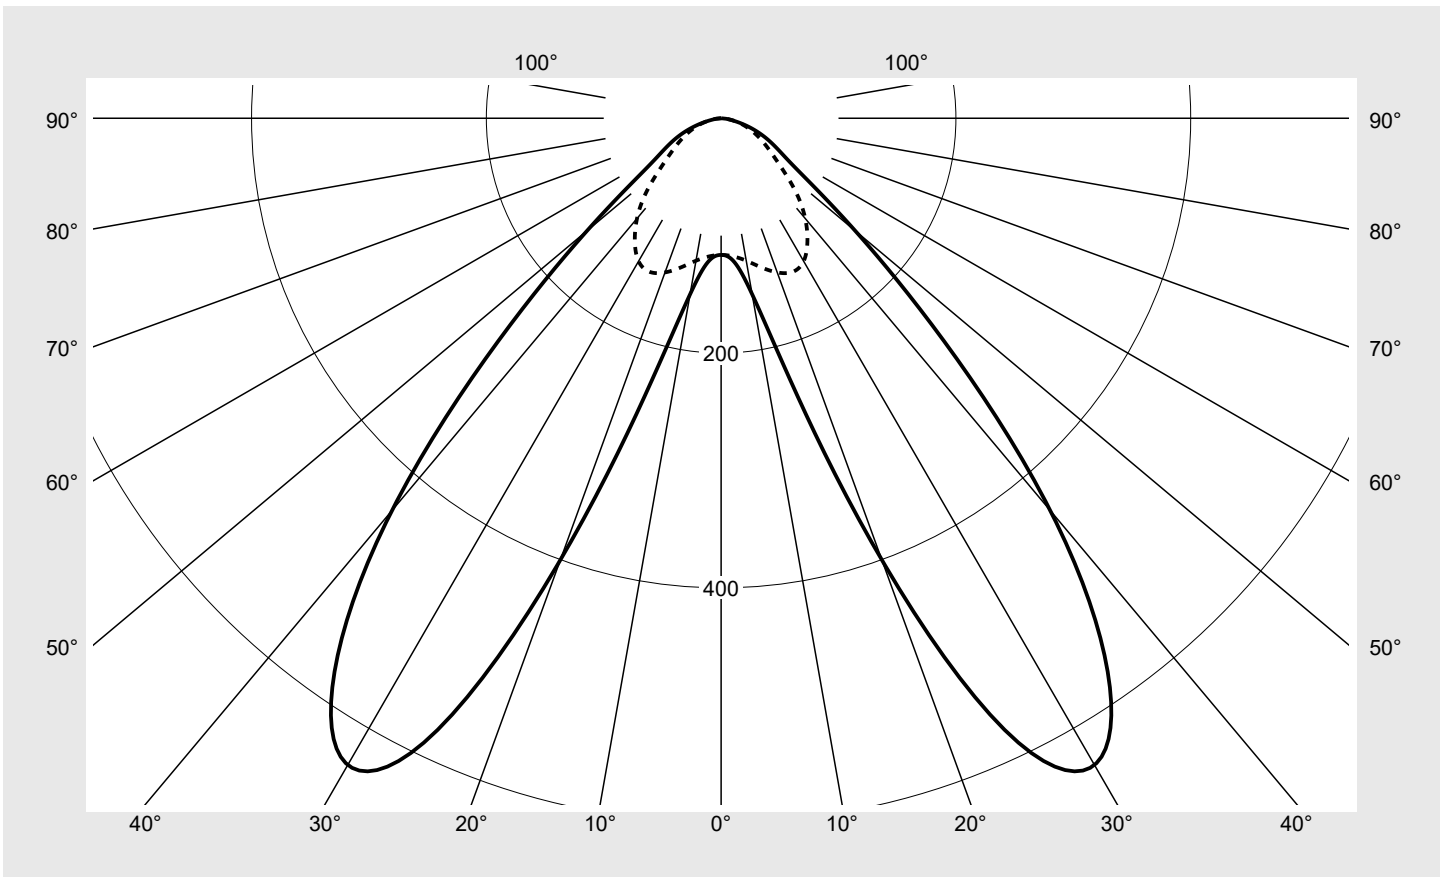

Classifications

DIN 5040 A 4 0
 CIE N1=55 N2=89 N3=98
 N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL19CN48XFD EAN: 4058352418338	LP number 58532_28
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	116.4	116.4	116.4	116.4	116.4	116.4	116.4	0.7	0.7
5°	122.3	121.8	120.5	120.1	119.3	118.4	118.1	5.7	6.4
10°	152.3	149.6	141.1	133.1	127.4	124.1	123.2	12.9	19.3
15°	235.7	226.2	196.7	164.2	142.2	133.3	131.4	24.7	44.1
20°	400.4	377.8	306.4	227.1	167.8	143.8	139.7	46.6	90.7
25°	577.7	557.7	476.8	343.4	212.9	153.0	144.3	81.3	172.0
30°	636.1	636.8	610.4	517.3	280.0	157.9	140.6	118.3	290.3
35°	573.7	597.7	662.3	665.7	347.9	155.6	128.2	145.7	436.0
40°	436.2	470.5	613.4	703.5	376.1	144.6	111.4	151.6	587.6
45°	268.7	299.8	459.0	605.2	334.0	122.5	91.2	129.2	716.8
50°	149.1	168.3	276.5	419.8	259.3	97.4	69.0	93.1	809.9
55°	85.3	95.5	151.2	245.9	199.7	79.3	53.1	62.9	872.9
60°	59.3	63.7	88.0	138.5	152.7	65.0	42.1	44.2	917.1
65°	44.9	47.0	60.8	84.9	110.7	51.4	33.0	32.6	949.7
70°	31.7	33.1	42.5	56.3	76.3	38.4	24.7	23.6	973.3
75°	19.0	20.1	26.0	34.9	49.6	26.3	17.0	15.4	988.7
80°	8.8	9.4	12.7	18.2	27.0	15.2	9.8	8.3	997.0
85°	3.4	3.6	4.7	6.8	9.5	5.9	3.7	3.1	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL19CN48XFD EAN: 4058352418338	LP number 58532_28
---------------------------------------	---	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	21.3	22.9	21.6	23.2	23.5	20.1	21.7	20.5	22.0	22.4
	3H	21.4	22.9	21.8	23.2	23.6	20.4	21.8	20.8	22.2	22.5
	4H	21.5	22.8	21.9	23.2	23.6	20.5	21.8	20.9	22.2	22.6
	6H	21.5	22.7	21.9	23.1	23.5	20.5	21.8	20.9	22.1	22.5
	8H	21.5	22.7	22.0	23.0	23.4	20.5	21.7	20.9	22.1	22.5
	12H	21.5	22.6	22.0	23.0	23.4	20.5	21.7	20.9	22.0	22.5
4H	2H	21.7	23.0	22.0	23.4	23.8	20.8	22.1	21.2	22.5	22.9
	3H	21.9	23.1	22.4	23.5	23.9	21.5	22.7	22.0	23.0	23.5
	4H	22.0	23.1	22.5	23.5	23.9	21.8	22.8	22.2	23.2	23.6
	6H	22.1	23.0	22.5	23.4	23.8	21.9	22.8	22.4	23.2	23.7
	8H	22.1	22.9	22.5	23.3	23.8	21.9	22.7	22.4	23.2	23.7
	12H	22.1	22.8	22.6	23.2	23.7	21.9	22.7	22.4	23.1	23.6
8H	4H	22.2	23.0	22.6	23.5	23.9	22.0	22.8	22.5	23.2	23.7
	6H	22.3	22.9	22.7	23.4	23.9	22.3	23.0	22.8	23.4	23.9
	8H	22.3	22.9	22.8	23.4	23.9	22.4	23.0	22.9	23.4	24.0
	12H	22.3	22.8	22.8	23.3	23.8	22.4	22.9	22.9	23.4	23.9
12H	4H	22.2	23.0	22.7	23.4	23.9	22.0	22.7	22.5	23.2	23.7
	6H	22.3	22.9	22.8	23.4	23.9	22.3	22.9	22.8	23.4	23.9
	8H	22.3	22.8	22.8	23.3	23.9	22.4	22.9	22.9	23.4	24.0

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1500 B = 58
------------------------	---	--------------------------------------	----------------------------------

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		14324.5	15982.4	24473.5	32266.0	17806.3	6532.0	4861.8	
50°		8743.0	9873.5	16219.0	24620.5	15209.8	5713.7	4045.7	
55°		5609.3	6276.8	9939.6	16164.8	13125.9	5209.4	3487.8	
60°		4470.9	4806.7	6636.1	10440.7	11512.0	4904.7	3174.8	
65°		4004.9	4197.1	5424.1	7574.8	9877.3	4582.8	2940.0	
70°		3498.7	3647.6	4688.8	6200.6	8414.4	4235.6	2720.8	
75°		2768.5	2930.9	3791.0	5086.2	7228.2	3833.8	2475.0	
80°		1907.8	2030.2	2756.0	3956.4	5860.3	3304.0	2135.3	
85°		1491.1	1555.5	2014.9	2920.7	4129.8	2534.0	1619.6	

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL19CN48XFD EAN: 4058352418338	LP number 58532_28
--	---	-------------------------------------

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

