




Photometric test report

Family Licross® 11 Protected	Order number: 51TP11DN4EXRE EAN: 4058352447314	LP number 58525_19
	Version prismatic cover, frosted, narrow distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-DALI Rated values Net luminous flux = 14140 lm Power consumption = 84.2 W Luminous efficacy = 167.9 lm/W	serial documentation 05.10.2020
		

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 2130 cd/klm**

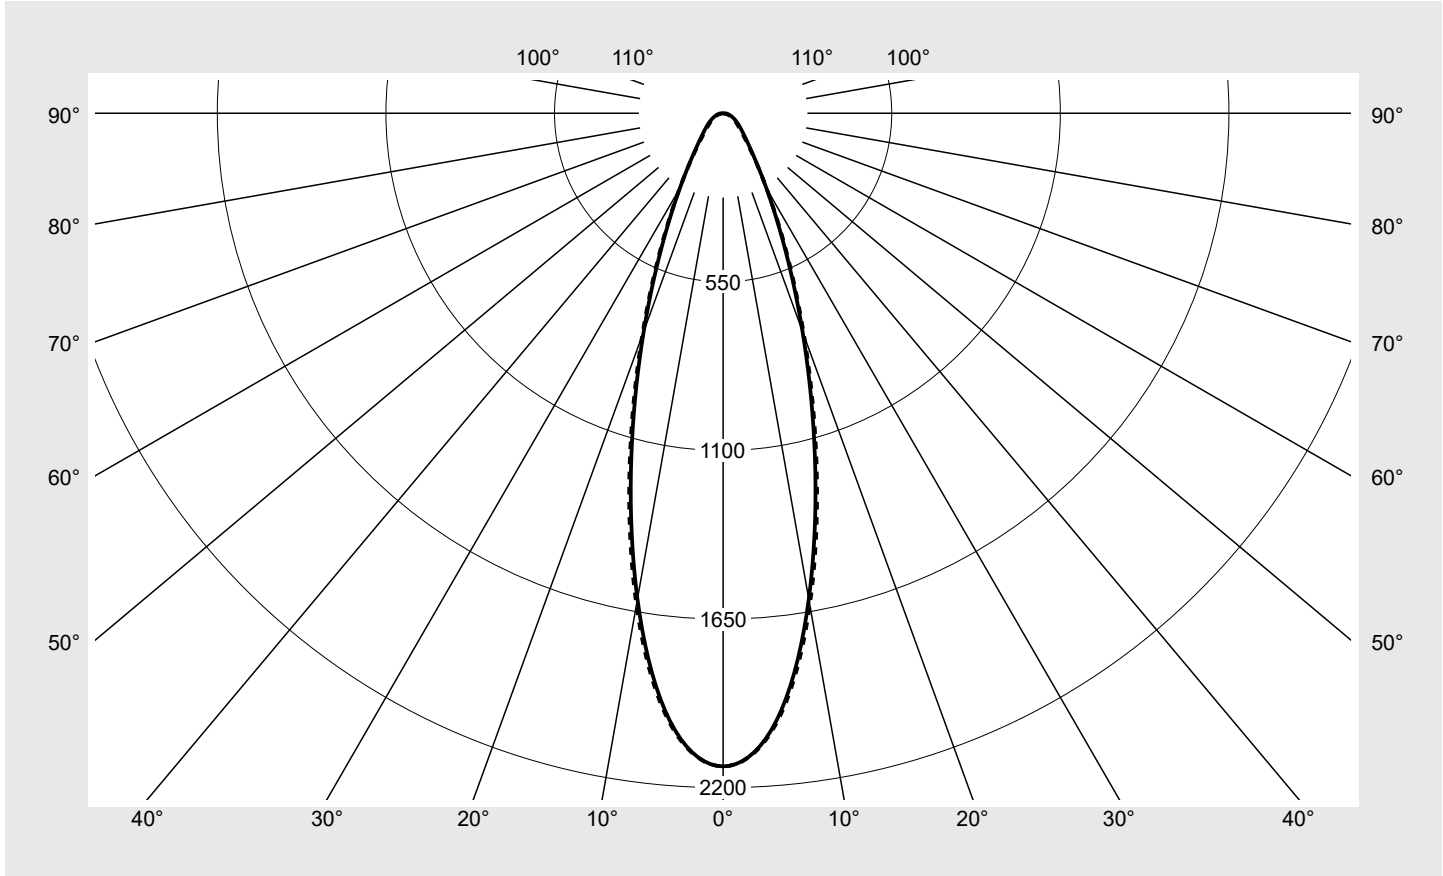

Classifications	
DIN 5040	A 7 1
CIE	N1=84 N2=94 N3=98 N4=99 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	99.1%
ϕ_o	0.9%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Protected	Order number: 51TP11DN4EXRE EAN: 4058352447314	LP number 58525_19
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	0°	15°	30°	45°	60°	75°	90°	Phi-zone	Total Phi-zone
	180°	165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	2130.5	2130.5	2130.5	2130.5	2130.5	2130.5	2130.5	12.7	12.7
5°	1990.0	1982.4	1972.8	1980.9	1991.5	1994.0	1997.3	94.9	107.6
10°	1609.4	1602.7	1594.9	1604.0	1616.7	1623.6	1628.9	153.3	260.9
15°	1156.5	1152.7	1146.1	1151.7	1161.7	1170.4	1176.7	164.3	425.2
20°	757.1	754.5	751.0	754.8	760.5	766.7	772.3	142.2	567.4
25°	464.1	463.3	461.4	464.7	468.5	471.4	475.4	108.1	675.5
30°	281.8	280.0	276.3	277.8	280.6	282.2	284.6	76.7	752.2
35°	178.8	175.8	169.5	168.1	169.9	172.0	174.0	54.1	806.3
40°	123.8	119.7	111.6	107.8	108.9	112.2	115.0	39.9	846.2
45°	92.5	87.9	79.0	74.1	74.5	78.8	82.8	31.1	877.3
50°	72.9	68.3	60.1	54.9	54.7	59.1	63.7	25.6	902.9
55°	58.5	54.5	47.8	42.9	42.0	45.8	50.2	21.5	924.4
60°	46.6	43.5	38.6	34.6	32.9	35.6	39.1	18.0	942.5
65°	36.7	34.5	31.1	28.0	26.1	27.3	29.5	14.9	957.4
70°	28.5	27.0	24.6	22.5	20.4	20.1	21.2	12.0	969.4
75°	21.8	20.7	19.0	17.5	15.4	14.0	14.0	9.2	978.6
80°	16.2	15.4	14.3	12.9	10.9	8.9	8.1	6.7	985.3
85°	11.7	11.2	10.3	9.1	7.1	4.7	3.5	4.6	989.8
90°	8.1	7.7	6.9	5.8	3.9	1.7	0.3	2.8	992.6
95°	6.9	6.6	5.8	4.7	3.0	1.1	0.2	2.3	994.8
100°	6.0	5.6	4.9	3.8	2.2	0.6	0.2	1.8	996.7
105°	5.1	4.8	4.0	2.9	1.5	0.3	0.2	1.4	998.1
110°	4.3	4.0	3.2	2.2	0.9	0.2	0.2	1.1	999.2
115°	3.6	3.2	2.5	1.6	0.5	0.3	0.3	0.8	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Protected	Order number: 51TP11DN4EXRE EAN: 4058352447314	LP number 58525_19
--	---	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	17.3	18.5	17.6	18.8	19.1	16.9	18.1	17.3	18.4	18.7
	3H	18.3	19.4	18.7	19.7	20.1	17.8	18.9	18.2	19.2	19.6
	4H	18.8	19.8	19.2	20.2	20.6	18.2	19.2	18.6	19.5	19.9
	6H	19.3	20.2	19.7	20.6	21.0	18.5	19.4	18.9	19.7	20.1
	8H	19.6	20.4	20.1	20.8	21.2	18.7	19.4	19.1	19.8	20.2
	12H	19.8	20.5	20.3	20.9	21.3	18.7	19.4	19.1	19.8	20.2
4H	2H	17.5	18.5	17.9	18.9	19.2	17.2	18.2	17.6	18.5	18.9
	3H	18.8	19.6	19.2	20.0	20.4	18.3	19.1	18.7	19.5	19.9
	4H	19.4	20.2	19.9	20.6	21.0	18.8	19.5	19.2	19.9	20.4
	6H	20.1	20.7	20.5	21.1	21.6	19.2	19.8	19.6	20.2	20.7
	8H	20.4	20.9	20.8	21.4	21.8	19.3	19.9	19.8	20.3	20.8
	12H	20.7	21.1	21.1	21.6	22.1	19.4	19.9	19.9	20.3	20.8
8H	4H	19.6	20.2	20.1	20.6	21.1	19.0	19.6	19.5	20.0	20.5
	6H	20.4	20.8	20.9	21.3	21.8	19.5	20.0	20.0	20.5	21.0
	8H	20.7	21.2	21.3	21.6	22.2	19.7	20.1	20.2	20.6	21.2
	12H	21.2	21.5	21.7	22.0	22.5	19.9	20.2	20.4	20.7	21.3
12H	4H	19.6	20.1	20.1	20.6	21.1	19.1	19.5	19.6	20.0	20.5
	6H	20.4	20.8	20.9	21.3	21.8	19.6	20.0	20.1	20.5	21.0
	8H	20.9	21.2	21.4	21.7	22.2	19.9	20.2	20.4	20.7	21.3


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1480	H(C0) = 13	H(C180) = 13
			B = 78	H(C90) = 0	H(C270) = 0

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		13738.5	13108.3	11961.3	11484.7	11916.6	13088.9	14334.5	
50°		11590.7	10922.4	9778.0	9179.2	9474.0	10717.1	12130.3	
55°		10097.2	9469.0	8461.9	7844.6	8009.9	9219.9	10722.2	
60°		8867.7	8340.8	7564.7	7029.9	7052.5	8120.3	9578.6	
65°		7837.8	7433.9	6891.6	6487.3	6423.1	7231.3	8540.5	
70°		6995.8	6697.0	6310.1	6078.1	5958.5	6448.8	7583.4	
75°		6346.9	6111.7	5839.9	5740.2	5561.7	5692.6	6631.7	
80°		5883.9	5693.2	5541.6	5458.7	5205.3	5018.4	5681.1	
85°		5675.2	5525.4	5460.3	5468.2	5084.6	4465.5	4907.6	

Photometric test report

Family Licross® 11 Protected	Order number: 51TP11DN4EXRE EAN: 4058352447314	LP number 58525_19
---	---	-------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85°

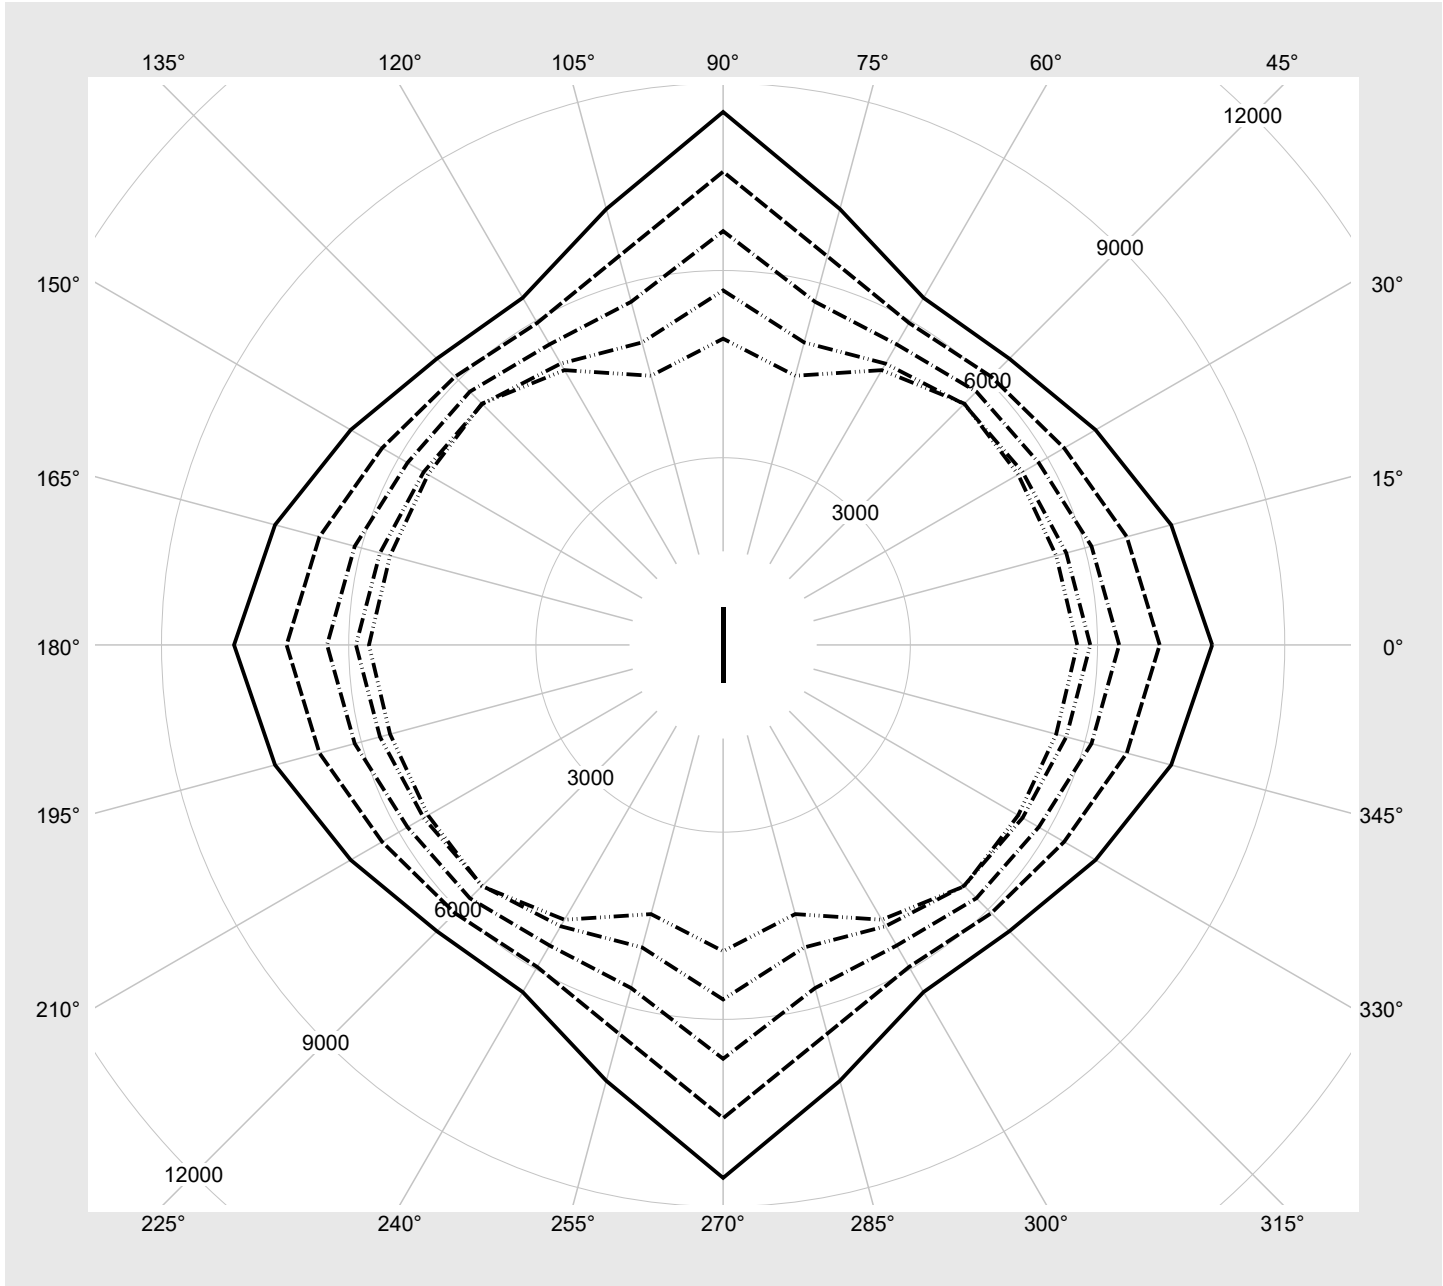

Photometric test report

Family Licross® 11 Protected	Order number: 51TP11DN4EXRE EAN: 4058352447314	LP number 58525_19
--	---	------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	14140	84.2
95	241	252	13427	79.4
90	227	250	12714	74.9
85	214	248	12027	70.4
80	200	245	11286	65.7
75	187	243	10598	61.5
70	174	240	9882	57.2
65	161	237	9194	53.1
60	148	234	8478	48.9
55	135	231	7762	44.7
50	122	227	7045	40.7
45	110	223	6355	36.7
40	98	219	5665	32.8
35	85	214	4949	29.0
30	73	208	4259	25.1
25	60	201	3510	21.3
20	49	194	2848	17.6
15	36	182	2099	13.6
10	25	169	1438	10.5
5	13	145	747	6.8