

Photometric test report

Family
Licross® 11 Protected



Order number: 51TS12VN465FD
EAN: 4058352474921

LP number
58522_61


Version prismatic cover, frosted, wide distribution
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG-DALI CLO
Setting DC mode (central or group accumulator) initial emergency light level
Rated values Net luminous flux = 1000 lm
 Power consumption = 8.0 W
 Luminous efficacy = 125 lm/W

serial
documentation
25.01.2021

sitEco

Luminous intensity in cd/klm **C180-0** **C270-90**

Imax: 420 cd/klm

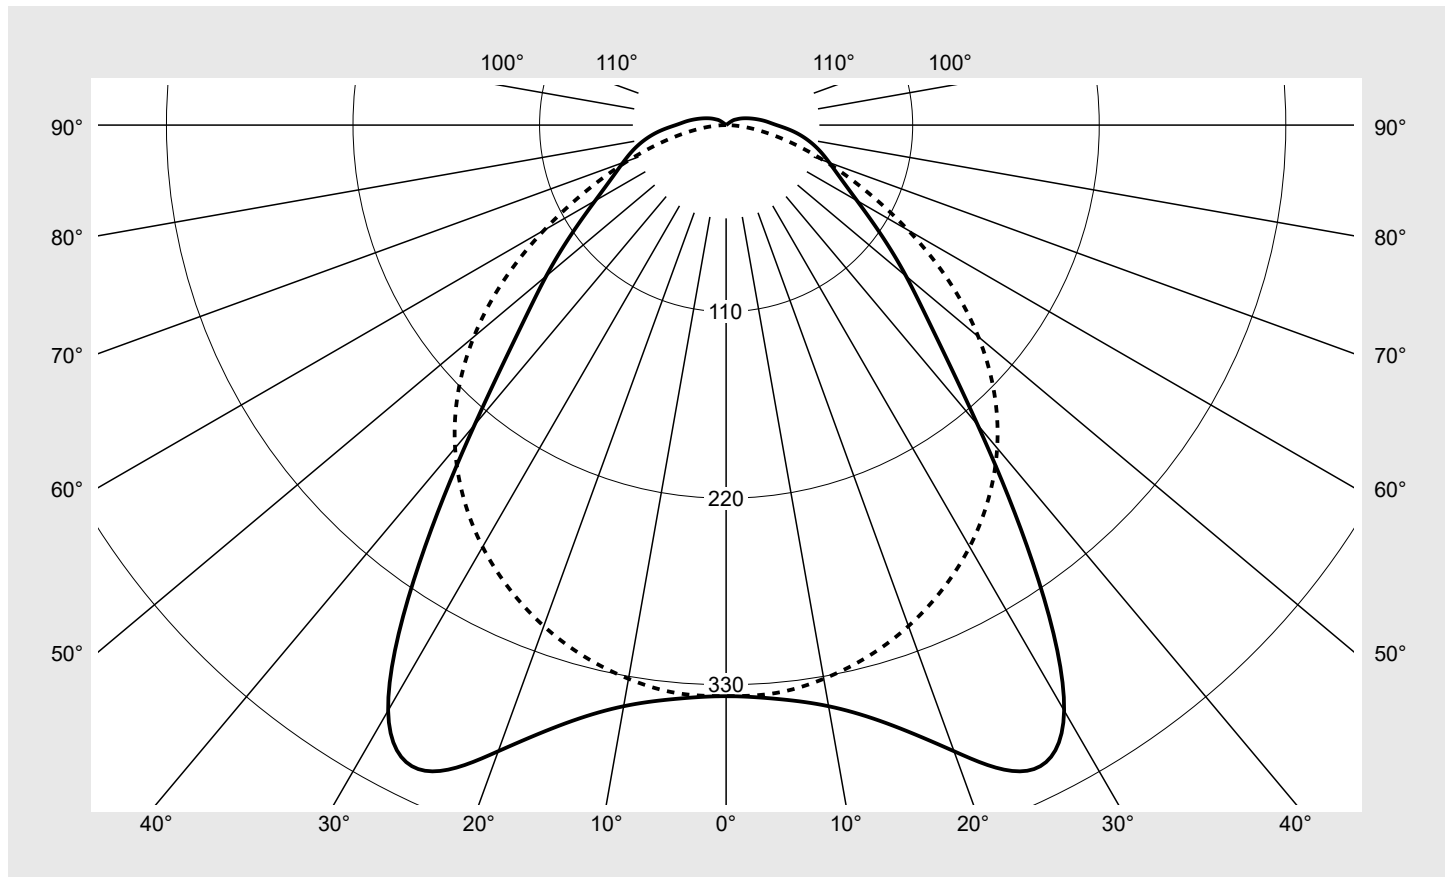

Classifications

DIN 5040 A 4 1
 CIE N1=54 N2=82 N3=95
 N4=97 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 96.8%
 ϕ_o 3.2%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Protected	Order number: 51TS12VN465FD EAN: 4058352474921	LP number 58522_61
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	336.7	336.7	336.7	336.7	336.7	336.7	336.7	2.0	2.0
5°	339.6	338.6	335.9	336.3	336.9	336.0	336.1	16.1	18.1
10°	347.9	347.0	341.3	338.0	335.2	332.1	331.5	32.3	50.4
15°	365.1	363.4	352.6	343.0	333.9	326.3	324.2	48.8	99.2
20°	392.9	389.6	370.2	350.5	332.5	318.7	314.4	66.1	165.3
25°	420.1	417.2	393.2	361.7	330.8	309.3	301.9	83.9	249.2
30°	398.6	403.0	395.6	369.9	329.0	297.6	287.2	97.7	346.8
35°	315.4	327.2	346.9	353.5	322.7	283.2	269.5	100.9	447.7
40°	230.7	242.3	270.7	302.4	300.6	265.5	248.6	95.2	542.9
45°	173.9	182.1	205.6	239.8	258.3	240.0	223.6	85.6	628.5
50°	138.5	144.5	161.6	188.3	208.7	204.6	194.1	75.2	703.7
55°	110.6	115.5	130.2	150.3	164.6	163.9	160.4	64.4	768.0
60°	89.1	92.4	103.6	120.9	128.5	124.9	123.9	53.5	821.6
65°	74.6	76.3	82.5	95.4	99.4	91.8	89.8	43.7	865.3
70°	64.8	65.1	66.4	73.4	75.2	65.0	61.7	35.1	900.3
75°	56.7	56.1	54.1	55.3	54.0	43.4	39.3	27.4	927.8
80°	48.3	47.2	43.9	40.6	36.4	26.8	21.9	20.7	948.5
85°	39.1	38.0	34.5	29.4	22.9	14.4	9.1	14.9	963.3
90°	29.8	28.8	25.7	20.2	13.1	5.8	0.8	9.9	973.3
95°	24.0	23.5	21.4	16.6	9.9	3.5	0.7	7.9	981.2
100°	19.2	18.8	17.3	13.3	7.4	1.9	0.6	6.2	987.4
105°	15.1	14.8	13.6	10.2	5.0	0.8	0.6	4.6	992.0
110°	11.8	11.3	10.2	7.3	2.9	0.6	0.6	3.3	995.3
115°	9.0	8.5	7.3	4.7	1.4	0.7	0.7	2.3	997.6
120°	6.6	6.1	4.9	2.7	0.8	0.7	0.7	1.5	999.1
125°	4.4	4.0	2.9	1.3	0.7	0.8	0.8	0.9	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Protected	Order number: 51TS12VN465FD EAN: 4058352474921	LP number 58522_61
--	---	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	13.2	14.8	13.5	15.1	15.4	15.0	16.7	15.4	17.0	17.3
	3H	14.3	15.8	14.7	16.1	16.5	16.1	17.5	16.4	17.9	18.2
	4H	15.0	16.4	15.4	16.8	17.1	16.4	17.8	16.8	18.2	18.5
	6H	15.8	17.1	16.2	17.4	17.8	16.7	17.9	17.1	18.3	18.7
	8H	16.2	17.4	16.6	17.8	18.2	16.8	18.0	17.2	18.3	18.7
	12H	16.6	17.7	17.0	18.1	18.5	16.8	17.9	17.3	18.3	18.8
4H	2H	14.0	15.4	14.4	15.7	16.1	15.5	16.9	15.9	17.2	17.6
	3H	15.4	16.5	15.8	16.9	17.3	16.8	17.9	17.2	18.3	18.7
	4H	16.2	17.2	16.6	17.6	18.1	17.3	18.3	17.7	18.7	19.2
	6H	17.1	18.0	17.5	18.4	18.9	17.6	18.6	18.1	19.0	19.4
	8H	17.5	18.4	18.0	18.8	19.3	17.7	18.6	18.2	19.0	19.5
	12H	18.0	18.8	18.5	19.3	19.7	17.9	18.6	18.3	19.1	19.6
8H	4H	16.6	17.4	17.1	17.9	18.4	17.5	18.4	18.0	18.8	19.3
	6H	17.7	18.4	18.2	18.9	19.4	18.1	18.8	18.6	19.2	19.8
	8H	18.3	18.9	18.8	19.4	19.9	18.3	18.9	18.8	19.4	19.9
	12H	18.9	19.4	19.4	19.9	20.5	18.4	19.0	19.0	19.5	20.0
12H	4H	16.7	17.4	17.1	17.9	18.4	17.6	18.4	18.1	18.8	19.3
	6H	17.8	18.4	18.3	18.9	19.4	18.2	18.8	18.7	19.3	19.8
	8H	18.5	19.0	19.0	19.5	20.0	18.5	19.0	19.0	19.5	20.0

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1480	H(C0) = 13	H(C180) = 13
			B = 78	H(C90) = 0	H(C270) = 0

C-planes	γ	Luminance in cd/m ²								
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°		
45°		1825.7	1921.6	2200.9	2627.9	2920.4	2818.3	2739.5		
50°		1556.9	1633.5	1858.4	2225.3	2558.3	2623.0	2616.1		
55°		1348.7	1418.1	1630.7	1943.0	2221.9	2331.6	2422.0		
60°		1198.3	1251.9	1435.9	1739.1	1945.5	2013.2	2147.3		
65°		1127.0	1163.0	1291.1	1561.6	1729.1	1722.9	1841.1		
70°		1125.0	1144.0	1204.8	1404.7	1549.6	1472.4	1562.6		
75°		1169.1	1173.9	1176.7	1284.4	1379.8	1250.6	1314.7		
80°		1238.2	1231.7	1204.8	1213.2	1232.5	1074.7	1090.6		
85°		1336.7	1329.4	1293.2	1245.6	1167.1	955.9	906.6		

Photometric test report

Family Licross® 11 Protected	Order number: 51TS12VN465FD EAN: 4058352474921	LP number 58522_61
---	---	-------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

