


Photometric test report

Family
MUSHROOM LUMINAIRE LED



Order number: **5XA5235AF14H + 5XA54000XS**
EAN: **4058352831878 + 4050737730073**

LP number
58301_27

serial
documentation
07.07.2022

Version post-top- or mounting to wall arm, spreader element, structured
Optic asymmetric, wide distribution (ST1.2a)
Cover cover transparent, PMMA
Lamps LED 2200 K | CRI ≥ 70
Controlgear ECG SITECO iQ
Rated values Net luminous flux = 1470 lm
Power consumption = 12.9 W
Luminous efficacy = 114 lm/W

siteco

Luminous intensity in cd/klm


C180-0

C205-25

C210-30

C270-90

Imax: 594 cd/klm

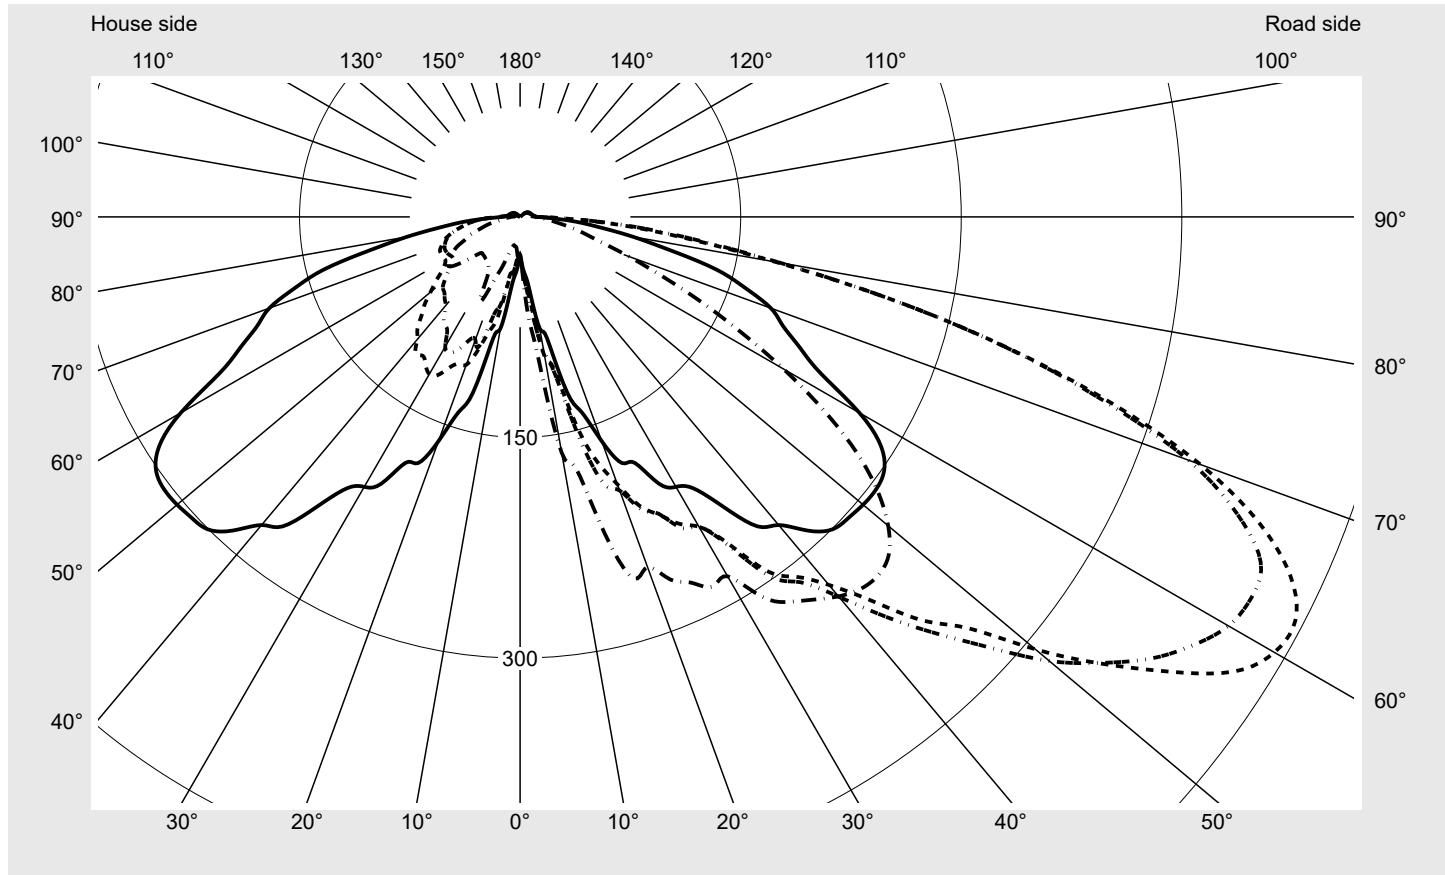

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	97.2%
Eta 90° - 180°	2.8%

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	492.4
Imax 80°	179.4
Imax 90°	16.3
Imax >90°	11.5
Imax >95°	9.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family MUSHROOM LUMINAIRE LED	Order number: 5XA5235AF14H + 5XA54000XS EAN: 4058352831878 + 4050737730073	LP number 58301_27
---	---	------------------------------

Envelope curve in cd/klm **KMK 62.5°** **KMK 60°** **KMK 57.5°** **KMK 55°**

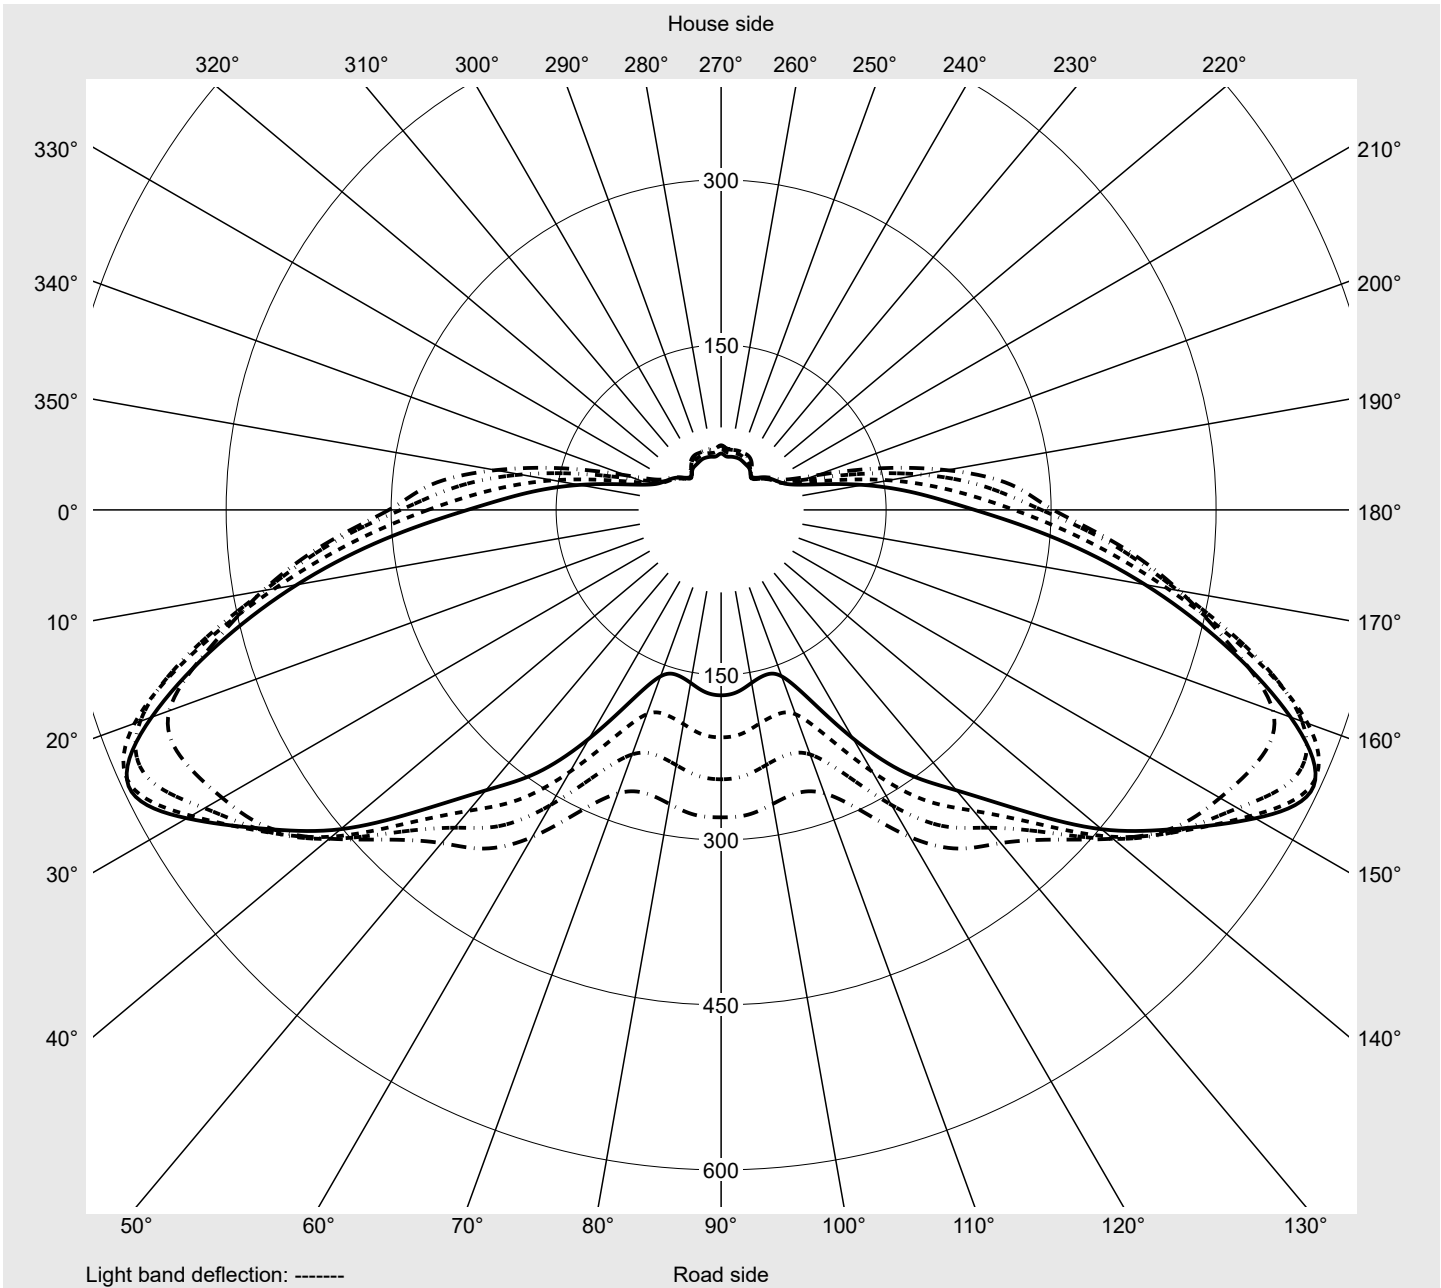

Photometric test report

Family MUSHROOM LUMINAIRE LED	Order number: 5XA5235AF14H + 5XA54000XS EAN: 4058352831878 + 4050737730073	LP number 58301_27
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6
2,5°	33.0	32.6	33.9	34.9	35.6	36.0	36.3	36.4	36.1	35.9	36.1	36.8	37.9
5,0°	39.7	42.4	43.0	44.8	47.3	47.5	48.5	48.6	49.7	52.2	54.8	56.4	59.0
7,5°	51.7	55.6	55.4	55.3	59.1	64.7	69.6	76.7	79.9	83.2	84.0	84.8	86.0
10,0°	77.2	82.3	85.2	89.4	93.7	96.6	93.5	94.3	93.7	97.4	109.3	118.1	126.3
12,5°	84.5	90.8	96.5	97.1	103.7	105.4	109.4	117.7	133.0	145.9	155.2	159.4	165.0
15,0°	123.5	123.4	129.8	138.9	130.8	144.8	155.3	169.0	177.3	177.8	181.5	186.4	192.0
17,5°	139.2	154.7	149.8	159.7	170.6	174.8	190.5	193.1	198.0	198.8	204.4	210.4	218.1
20,0°	162.3	168.9	176.5	197.5	186.5	193.5	198.0	202.7	208.5	209.2	215.1	220.8	231.0
22,5°	181.2	194.6	196.0	209.4	208.5	212.8	215.3	213.2	215.8	222.7	222.8	229.0	238.7
25,0°	184.6	190.9	193.3	208.9	210.0	223.5	222.7	226.2	229.9	230.7	234.9	238.8	246.8
27,5°	204.5	214.7	227.9	220.6	229.5	235.4	238.7	244.9	246.3	250.2	255.7	262.8	269.5
30,0°	212.0	218.2	225.9	228.2	230.5	243.3	243.4	255.5	259.0	266.4	272.4	277.8	284.3
32,5°	218.7	226.8	242.6	242.8	245.7	263.4	266.2	280.4	292.5	301.7	303.5	310.5	315.7
35,0°	240.3	249.5	265.0	267.2	276.7	294.6	299.4	302.6	313.3	319.7	329.1	331.1	330.6
37,5°	265.3	279.1	288.8	294.4	296.9	308.5	313.1	324.1	335.0	341.6	350.9	353.5	355.7
40,0°	273.5	284.3	297.8	311.9	318.0	326.7	337.2	348.6	359.2	367.1	376.3	377.2	375.0
42,5°	289.3	304.4	316.1	333.6	347.7	354.2	369.2	378.0	386.6	390.8	394.1	393.6	389.8
45,0°	300.4	320.5	340.4	365.4	379.4	388.4	400.7	411.7	415.4	411.2	411.2	406.4	396.8
47,5°	302.9	327.9	360.0	391.3	409.4	414.2	433.6	442.9	436.0	424.5	417.5	409.9	395.5
50,0°	304.5	344.2	380.7	420.9	449.8	457.4	469.8	469.0	452.7	428.2	417.4	406.6	382.1
52,5°	304.9	358.7	400.5	452.1	494.2	499.2	498.2	489.2	461.6	427.7	409.7	393.8	368.3
55,0°	302.1	362.4	423.0	480.3	533.9	539.2	523.7	503.2	465.0	424.0	395.4	375.9	343.4
57,5°	291.3	356.7	421.6	499.2	562.0	575.5	542.3	508.2	465.3	414.1	377.2	350.7	309.7
60,0°	266.5	336.1	412.3	494.5	567.6	592.3	556.3	509.5	462.1	402.6	357.1	321.9	274.8
62,5°	230.5	307.5	391.6	474.0	551.0	594.4	560.7	505.5	451.6	386.4	332.8	291.7	240.0
65,0°	209.7	280.0	362.2	439.3	519.7	578.1	555.7	495.3	435.9	368.7	308.3	260.5	209.5
67,5°	193.4	259.7	334.8	403.2	479.5	544.2	527.9	469.0	406.7	340.4	278.6	229.6	179.0
70,0°	181.5	243.8	309.6	365.3	431.9	492.4	483.7	425.3	363.8	303.4	245.9	199.6	156.5
72,5°	160.4	223.3	276.5	326.7	378.0	422.4	416.7	366.3	307.8	255.7	210.9	176.5	136.4
75,0°	138.0	188.8	230.5	271.1	313.5	342.3	341.3	298.8	247.4	207.7	177.5	151.3	110.5
77,5°	104.3	146.1	177.1	207.1	239.7	257.8	257.7	228.1	187.6	157.7	139.7	124.5	101.8
80,0°	78.2	102.5	123.9	145.1	166.2	176.6	179.4	162.6	136.0	114.5	103.6	98.9	82.0
82,5°	55.0	70.5	83.9	98.0	110.1	117.0	122.2	115.7	100.5	84.8	74.3	71.5	54.9
85,0°	38.7	46.5	54.7	63.4	70.3	74.5	79.2	79.1	70.8	60.0	51.6	49.0	38.5
87,5°	21.9	25.2	28.7	32.5	35.6	36.7	38.4	39.1	35.9	30.7	27.1	25.8	22.7
90,0°	11.7	11.7	11.8	11.9	11.9	12.0	12.1	12.1	12.1	12.0	12.1	12.1	12.1
92,5°	10.0	10.1	10.1	10.3	10.3	10.5	10.7	10.9	11.0	11.0	11.1	11.1	11.1
95,0°	8.9	9.0	9.2	9.3	9.4	9.5	9.6	9.7	9.8	9.9	10.0	10.0	10.0
97,5°	8.3	8.5	8.6	8.7	8.8	8.8	8.9	8.9	8.9	9.0	9.0	8.9	8.9
100,0°	8.0	8.1	8.2	8.3	8.4	8.4	8.4	8.4	8.5	8.5	8.5	8.5	8.5
102,5°	7.7	7.8	7.9	7.9	8.0	8.0	8.1	8.1	8.1	8.2	8.2	8.2	8.2
105,0°	7.3	7.5	7.6	7.7	7.7	7.7	7.7	7.8	7.8	7.9	7.9	7.9	7.9
107,5°	7.0	7.2	7.2	7.3	7.4	7.4	7.4	7.4	7.5	7.5	7.5	7.6	7.6
110,0°	6.7	6.9	7.0	7.0	7.0	7.1	7.1	7.2	7.2	7.3	7.3	7.3	7.3
112,5°	6.4	6.6	6.7	6.7	6.8	6.8	6.8	6.9	6.9	7.0	7.0	7.0	7.1

Photometric test report

Family MUSHROOM LUMINAIRE LED	Order number: 5XA5235AF14H + 5XA54000XS EAN: 4058352831878 + 4050737730073	LP number 58301_27
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6
2,5°	39.1	39.8	39.8	39.6	39.2	39.1	30.6	30.2	29.7	28.9	27.4	26.4	26.4
5,0°	60.9	63.0	66.5	68.2	68.9	70.5	37.3	37.0	35.4	34.4	33.6	31.3	29.9
7,5°	88.9	91.9	96.3	99.7	99.7	99.6	49.9	47.6	45.1	41.5	39.6	39.6	39.3
10,0°	134.7	140.1	148.8	154.2	158.3	162.8	78.8	69.2	57.0	47.8	43.8	40.6	41.6
12,5°	169.0	171.7	171.4	173.4	177.3	174.8	80.0	74.0	72.3	76.9	69.3	61.1	51.7
15,0°	195.1	203.0	206.1	216.4	220.9	223.6	118.9	115.8	109.4	95.7	80.3	68.7	64.7
17,5°	229.0	235.0	247.5	252.2	258.3	257.9	143.7	122.7	110.5	97.1	94.7	92.0	84.3
20,0°	233.4	239.1	248.5	255.1	255.1	253.4	153.7	134.2	123.3	113.5	107.0	88.9	80.6
22,5°	246.4	252.0	257.5	264.6	266.6	266.9	159.0	151.7	144.2	126.3	108.2	90.9	74.7
25,0°	255.9	265.1	271.8	276.3	275.3	274.3	176.6	167.4	148.6	131.6	112.8	99.7	81.5
27,5°	273.9	275.1	277.1	283.7	285.9	283.5	186.1	167.9	153.0	136.4	121.3	104.1	82.9
30,0°	292.1	296.0	295.3	292.5	285.6	282.2	198.0	179.3	165.2	143.9	123.5	101.8	77.6
32,5°	319.5	309.7	303.4	302.3	305.2	306.3	196.5	177.3	165.0	137.1	119.5	92.2	69.4
35,0°	329.7	325.0	323.7	319.1	318.1	319.5	221.2	197.7	169.9	141.6	115.4	89.5	66.0
37,5°	349.6	342.9	332.5	326.7	327.7	328.0	247.3	215.3	186.0	152.4	116.7	84.9	63.4
40,0°	362.2	349.6	339.5	336.0	337.4	336.9	255.7	223.4	184.8	148.3	108.8	78.7	63.5
42,5°	373.1	354.3	341.7	341.7	343.6	343.0	266.1	231.6	188.5	146.5	103.4	75.9	63.5
45,0°	377.6	353.2	341.3	342.1	344.7	344.5	275.6	235.9	186.5	136.3	94.8	72.8	63.3
47,5°	373.1	346.1	333.3	335.3	339.6	340.1	280.4	236.2	182.7	129.7	88.0	71.3	62.9
50,0°	357.5	329.7	318.1	322.2	327.5	326.8	280.0	229.9	174.0	116.6	79.4	66.9	60.0
52,5°	333.2	305.5	296.1	300.0	306.9	306.6	277.4	224.3	162.7	105.4	72.5	62.0	55.7
55,0°	301.9	274.2	266.6	271.4	278.2	279.5	264.3	208.2	145.3	91.8	65.4	56.9	51.5
57,5°	264.5	236.6	230.6	235.5	242.7	244.9	241.3	184.9	124.9	80.2	60.9	53.8	49.2
60,0°	227.1	197.7	192.9	197.6	204.6	206.8	208.7	155.0	103.6	71.5	58.7	53.7	49.3
62,5°	190.0	161.0	155.4	159.7	166.2	168.6	177.2	130.8	89.6	67.7	59.3	54.9	50.8
65,0°	159.4	130.7	123.6	127.2	133.1	134.2	155.0	111.6	80.5	65.7	59.3	55.6	51.2
67,5°	131.9	104.0	96.1	97.5	101.0	102.9	139.8	99.8	75.8	64.2	59.0	55.6	51.2
70,0°	109.9	82.6	74.4	74.3	76.3	78.8	126.3	90.4	71.2	61.6	56.7	54.4	50.3
72,5°	90.8	65.5	57.4	56.0	57.6	59.0	111.8	80.9	66.9	59.1	54.7	52.8	50.1
75,0°	74.8	52.5	45.0	43.6	45.0	47.1	93.0	69.8	60.1	54.3	50.8	50.2	48.9
77,5°	62.9	42.7	36.0	34.5	35.6	38.1	74.2	58.4	52.4	48.8	46.6	46.2	45.8
80,0°	51.1	34.5	28.8	27.3	27.8	29.2	56.2	46.7	43.9	42.2	41.1	41.0	41.7
82,5°	38.0	28.1	23.6	22.2	22.2	22.7	42.7	37.5	36.2	36.3	36.3	36.2	37.4
85,0°	29.8	23.4	19.9	18.5	18.1	18.1	31.4	29.1	29.2	30.4	31.3	30.8	32.4
87,5°	19.9	17.0	14.9	13.7	13.2	13.0	19.7	19.5	20.3	22.2	23.6	23.2	24.7
90,0°	12.2	12.2	12.0	11.5	11.2	11.0	11.7	12.0	12.6	13.7	14.8	14.6	15.5
92,5°	11.3	11.3	11.0	10.6	10.4	10.3	10.0	10.2	10.5	11.0	11.5	10.8	9.9
95,0°	10.1	10.1	10.1	9.8	9.6	9.6	8.6	8.3	8.0	7.7	7.3	7.0	6.7
97,5°	8.9	8.9	8.9	8.9	8.9	8.9	8.1	7.8	7.5	7.2	6.9	6.5	6.2
100,0°	8.6	8.5	8.5	8.5	8.5	8.5	7.7	7.5	7.2	6.9	6.6	6.3	6.0
102,5°	8.2	8.2	8.2	8.2	8.2	8.2	7.4	7.2	6.9	6.6	6.3	6.0	5.8
105,0°	7.9	7.9	7.9	7.9	7.9	7.9	7.2	6.9	6.7	6.4	6.1	5.8	5.6
107,5°	7.6	7.6	7.6	7.7	7.7	7.6	6.8	6.6	6.4	6.1	5.9	5.6	5.4
110,0°	7.3	7.4	7.4	7.4	7.4	7.4	6.5	6.3	6.1	5.9	5.7	5.4	5.2
112,5°	7.1	7.1	7.1	7.1	7.1	7.2	6.3	6.1	5.9	5.7	5.5	5.3	5.0

Photometric test report

Family MUSHROOM LUMINAIRE LED	Order number: 5XA5235AF14H + 5XA54000XS EAN: 4058352831878 + 4050737730073	LP number 58301_27
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6	25.6	0.0	0.0
2,5°	26.7	27.2	27.7	28.1	28.2	28.3	28.4	28.5	28.2	27.9	27.7	0.4	0.4
5,0°	29.1	26.7	27.5	28.4	28.3	28.1	27.0	26.1	24.9	24.0	23.7	1.0	1.4
7,5°	40.9	36.9	34.1	32.6	35.3	33.0	30.1	26.2	23.6	21.6	20.7	2.0	3.5
10,0°	43.8	47.4	45.2	40.1	36.2	34.5	29.8	23.7	21.0	20.1	20.2	3.7	7.2
12,5°	44.2	46.2	53.2	47.2	42.8	39.7	29.1	22.2	19.6	19.7	19.8	5.6	12.8
15,0°	60.4	53.1	52.1	41.8	35.5	34.2	35.9	29.4	25.8	23.0	22.8	8.4	21.1
17,5°	74.1	66.6	64.5	49.3	46.8	37.4	32.5	30.7	30.4	27.2	27.7	11.3	32.4
20,0°	74.9	65.5	57.7	52.4	47.4	40.7	38.4	36.5	33.3	35.1	37.4	13.6	46.0
22,5°	64.7	53.8	47.3	44.6	47.1	46.2	46.0	46.8	42.3	45.7	47.8	16.2	62.2
25,0°	67.8	51.9	45.4	43.9	44.6	45.5	47.2	50.6	53.0	58.8	63.8	18.6	80.8
27,5°	62.6	48.2	42.0	40.8	41.5	45.1	48.0	45.3	50.4	51.5	52.6	21.4	102.2
30,0°	59.6	46.5	40.9	39.3	39.6	41.0	42.3	39.5	40.2	41.1	42.6	23.8	126.0
32,5°	54.9	45.6	41.2	39.4	39.1	39.4	39.7	38.0	37.7	38.1	39.9	27.0	153.0
35,0°	52.2	44.2	41.0	39.6	39.4	38.9	38.8	37.8	35.5	36.6	37.8	30.7	183.7
37,5°	53.1	44.7	40.9	39.2	39.0	38.7	38.1	37.4	35.0	35.8	37.2	34.5	218.1
40,0°	54.4	45.9	42.2	39.3	38.7	38.0	37.2	36.7	34.2	35.2	36.8	37.8	256.0
42,5°	54.6	47.3	42.7	39.9	38.8	37.7	36.9	36.1	33.9	34.4	36.1	41.5	297.5
45,0°	55.1	46.9	41.9	40.2	39.9	38.3	37.0	36.1	33.9	34.2	35.9	45.0	342.5
47,5°	54.6	46.7	42.1	42.5	42.9	41.1	39.6	38.4	35.6	34.9	36.4	48.0	390.5
50,0°	52.4	44.6	42.0	45.5	48.2	47.6	46.1	44.8	42.2	41.0	42.9	50.7	441.2
52,5°	48.8	42.2	42.4	48.0	51.8	52.6	52.2	52.4	51.9	50.2	52.3	52.8	493.9
55,0°	45.5	40.2	42.0	48.7	53.5	55.4	55.5	56.0	56.2	56.2	58.7	53.8	547.7
57,5°	43.8	39.9	41.7	47.6	52.1	54.3	55.7	55.9	55.5	56.0	58.2	53.5	601.3
60,0°	44.2	40.2	41.3	46.1	49.4	51.4	52.8	53.0	52.5	52.9	55.2	52.0	653.3
62,5°	45.7	41.6	41.8	45.2	46.7	47.9	49.2	49.5	49.1	49.0	51.2	49.7	703.0
65,0°	46.8	42.6	42.0	44.5	44.0	43.6	44.7	44.9	45.0	44.6	46.8	47.0	750.0
67,5°	47.3	43.5	42.6	43.8	41.6	39.3	39.3	39.5	39.4	38.7	40.5	43.7	793.6
70,0°	47.5	44.8	43.9	43.8	39.7	35.1	34.7	35.2	35.4	35.0	36.8	40.0	833.6
72,5°	46.9	44.3	43.6	41.9	36.9	30.5	29.5	29.7	29.4	29.1	30.4	35.4	868.9
75,0°	45.6	43.8	42.7	39.6	33.9	26.2	24.8	25.1	24.6	24.3	25.3	30.0	898.9
77,5°	43.3	41.3	40.2	36.3	30.2	22.1	20.6	20.7	20.2	20.3	20.8	24.1	923.0
80,0°	40.4	37.9	37.1	33.0	26.7	18.4	16.8	16.6	15.9	16.0	15.3	18.2	941.2
82,5°	37.3	34.3	33.4	29.3	24.0	17.0	14.0	13.5	12.6	12.5	12.3	13.6	954.8
85,0°	33.3	29.7	28.6	24.5	20.5	14.5	11.6	11.3	10.5	10.3	10.3	9.9	964.7
87,5°	26.0	23.4	22.3	19.1	16.1	10.6	9.2	8.6	8.3	7.8	7.3	6.0	970.8
90,0°	16.3	14.9	14.2	12.4	10.3	7.5	6.9	6.6	6.3	6.1	6.2	3.2	974.0
92,5°	9.0	7.7	6.9	6.2	5.7	5.3	4.9	4.7	4.4	4.1	4.2	2.5	976.5
95,0°	6.4	6.0	5.7	5.4	5.1	4.8	4.5	4.3	4.2	3.9	3.9	2.2	978.7
97,5°	5.9	5.7	5.4	5.1	4.8	4.6	4.4	4.2	4.0	3.7	3.7	2.0	980.7
100,0°	5.7	5.5	5.2	4.9	4.7	4.4	4.3	4.1	3.9	3.6	3.6	1.9	982.6
102,5°	5.5	5.3	5.0	4.8	4.5	4.3	4.1	3.9	3.7	3.5	3.4	1.8	984.4
105,0°	5.4	5.1	4.9	4.7	4.4	4.2	4.0	3.8	3.7	3.4	3.4	1.7	986.1
107,5°	5.2	5.0	4.7	4.5	4.3	4.1	3.9	3.8	3.5	3.3	3.3	1.6	987.7
110,0°	5.0	4.8	4.6	4.4	4.2	4.0	3.9	3.7	3.4	3.2	3.2	1.6	989.3
112,5°	4.9	4.7	4.5	4.3	4.1	3.9	3.8	3.6	3.4	3.2	3.1	1.5	990.7

Photometric test report

Family MUSHROOM LUMINAIRE LED	Order number: 5XA5235AF14H + 5XA54000XS EAN: 4058352831878 + 4050737730073	LP number 58301_27
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	6.2	6.3	6.3	6.4	6.5	6.5	6.5	6.6	6.7	6.7	6.7	6.8	6.8
117,5°	5.8	5.9	6.0	6.1	6.1	6.2	6.2	6.3	6.3	6.4	6.4	6.5	6.5
120,0°	5.5	5.6	5.7	5.8	5.8	5.9	5.9	6.0	6.0	6.1	6.2	6.2	6.3
122,5°	5.1	5.2	5.3	5.4	5.4	5.5	5.5	5.6	5.7	5.7	5.8	5.9	5.9
125,0°	4.6	4.7	4.8	4.8	4.9	5.0	5.0	5.1	5.2	5.2	5.3	5.3	5.4
127,5°	4.0	4.0	4.1	4.2	4.2	4.2	4.3	4.4	4.4	4.5	4.5	4.6	4.6
130,0°	3.2	3.3	3.3	3.3	3.3	3.3	3.4	3.4	3.4	3.5	3.5	3.5	3.6
132,5°	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.6
135,0°	2.0	2.0	2.0	2.0	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9
137,5°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.6	1.6	1.6	1.6
140,0°	1.5	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.3	1.4	1.3
142,5°	1.3	1.3	1.2	1.2	1.2	1.2	1.2	1.2	1.1	1.1	1.1	1.1	1.1
145,0°	1.1	1.1	1.0	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.9	0.8	0.8
147,5°	0.9	0.9	0.8	0.8	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.7	0.7
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family MUSHROOM LUMINAIRE LED	Order number: 5XA5235AF14H + 5XA54000XS EAN: 4058352831878 + 4050737730073	LP number 58301_27
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	6.8	6.9	6.9	6.9	6.9	6.9	6.0	5.8	5.7	5.4	5.3	5.1	4.9
117,5°	6.6	6.6	6.6	6.7	6.7	6.7	5.7	5.5	5.4	5.2	5.0	4.8	4.7
120,0°	6.3	6.3	6.4	6.4	6.4	6.4	5.4	5.2	5.1	4.9	4.8	4.5	4.4
122,5°	6.0	6.0	6.0	6.1	6.1	6.1	5.0	4.9	4.7	4.6	4.4	4.3	4.1
125,0°	5.4	5.5	5.5	5.6	5.6	5.6	4.5	4.4	4.3	4.1	4.0	3.9	3.8
127,5°	4.7	4.7	4.8	4.8	4.8	4.8	3.9	3.8	3.7	3.6	3.5	3.4	3.3
130,0°	3.6	3.7	3.7	3.7	3.7	3.7	3.1	3.1	3.0	2.9	2.8	2.8	2.7
132,5°	2.6	2.6	2.6	2.6	2.6	2.6	2.4	2.4	2.4	2.3	2.3	2.3	2.2
135,0°	1.9	1.9	1.9	2.0	2.0	2.0	2.0	2.0	2.0	1.9	1.9	1.9	1.9
137,5°	1.6	1.6	1.6	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
140,0°	1.3	1.3	1.3	1.3	1.4	1.4	1.5	1.5	1.5	1.5	1.5	1.5	1.4
142,5°	1.1	1.1	1.1	1.1	1.1	1.1	1.3	1.3	1.3	1.3	1.3	1.3	1.3
145,0°	0.8	0.8	0.8	0.8	0.8	0.8	1.1	1.1	1.1	1.1	1.1	1.1	1.1
147,5°	0.7	0.7	0.7	0.7	0.7	0.7	0.9	0.9	0.9	0.9	0.9	0.9	0.9
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family MUSHROOM LUMINAIRE LED	Order number: 5XA5235AF14H + 5XA54000XS EAN: 4058352831878 + 4050737730073	LP number 58301_27
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	4.7	4.5	4.3	4.2	4.0	3.8	3.7	3.5	3.3	3.1	3.0	1.4	992.1
117,5°	4.5	4.3	4.1	4.0	3.8	3.7	3.5	3.3	3.1	2.9	2.8	1.3	993.4
120,0°	4.2	4.1	3.9	3.8	3.6	3.4	3.3	3.1	2.9	2.8	2.6	1.2	994.6
122,5°	4.0	3.8	3.7	3.5	3.4	3.2	3.1	2.9	2.7	2.6	2.6	1.1	995.7
125,0°	3.6	3.5	3.4	3.2	3.1	3.0	2.8	2.7	2.5	2.4	2.5	1.0	996.7
127,5°	3.2	3.1	2.9	2.8	2.7	2.6	2.5	2.4	2.3	2.2	2.2	0.8	997.5
130,0°	2.6	2.5	2.4	2.4	2.3	2.2	2.1	2.0	1.9	1.9	1.8	0.6	998.1
132,5°	2.2	2.1	2.0	2.0	1.9	1.9	1.8	1.7	1.7	1.6	1.6	0.5	998.6
135,0°	1.9	1.8	1.8	1.8	1.8	1.7	1.7	1.6	1.6	1.5	1.5	0.4	999.0
137,5°	1.7	1.7	1.6	1.6	1.6	1.6	1.5	1.5	1.4	1.4	1.4	0.3	999.3
140,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.3	1.3	1.2	1.2	1.2	0.2	999.5
142,5°	1.3	1.3	1.3	1.2	1.2	1.2	1.2	1.2	1.1	1.1	1.1	0.2	999.7
145,0°	1.1	1.1	1.1	1.1	1.1	1.1	1.0	1.0	1.0	1.0	1.0	0.2	999.9
147,5°	0.9	0.9	0.9	1.0	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.1	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family MUSHROOM LUMINAIRE LED	Order number: 5XA5235AF14H + 5XA54000XS EAN: 4058352831878 + 4050737730073	LP number 58301_27
Dimming levels table		environmental temperature: 25°C
siteco		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1470	12.9	13.3	13.1
95	241	252	1395	12.2	12.6	12.4
90	229	250	1325	11.5	11.9	11.7
85	216	248	1250	10.7	11.1	10.9
80	203	246	1175	10.1	10.5	10.3
75	190	243	1100	9.4	9.8	9.6
70	178	241	1030	8.9	9.1	9.0
65	165	238	955	8.2	8.4	8.3
60	152	235	880	7.6	7.8	7.7
55	140	232	810	7.0	7.2	7.1
50	127	229	735	6.4	6.6	6.5
45	114	225	660	5.8	6.0	5.9
40	102	221	590	5.3	5.4	5.4
35	89	216	515	4.8	4.9	4.8
30	76	210	440	4.3	4.3	4.3
25	63	203	365	3.7	3.8	3.8
24	60	201	347	3.5	3.7	3.6